





















Flange SAE / SAE Flanges





Pagina / Page	349	350	351	352	353	354
BSP Flanges						
	OL6000-OL6005 BSP Threaded Flanges	**OL6020-OL6025** BSP Threaded Counter Flanges	**OL6040-OL6045** Bsp Threaded Flat Flanges	**OL6060-OL6065** BSP Threaded Double Flanges	**OL6080-OL6085** BSP Threaded 90° Flanges	**OL6100-OL6105** BSP Threaded 90° Flanges

Pagina / Page	355	356			357	358
BSP Flanges				METRIC Flanges		
	OL6120-OL6125 60° Tapered Seat BSP Threaded Flanges	**OL6140-OL6145** 90° Flanges With 60° Tapered Seat And BSP			**OL6160-OL6165** DIN 2353 Metric Threaded Flanges	**OL6180-OL6185** DIN 2353 Metric Threaded 90° Flanges

Pagina / Page	359	360	361	362
NPT Flanges				
	OL6200-OL6205 NPT Threaded Flanges	**OL6220-OL6225** NPT Threaded Counter Flanges	**OL6240-OL6245** NPT Threaded Double Flanges	**OL6260-OL6265** NPT Threaded 90° Flanges

Pagina / Page	363	364		365	366	367
JIC Flanges			UN Flanges			
	OL6280-OL6285 JIC Threaded Flanges	**OL6300-OL6305** JIC Threaded 90° Flanges		**OL6320-6325** UN Threaded Flanges	**OL6340-OL6345** UN Threaded Counter Flanges	**OL6360-OL6365** UN Threaded 90° Flanges




















Pagina / Page	368	369	370	371
Weld in Flanges				
	OL6380-OL6385 Weld In Flanges	**OL6400-OL6405** Weld In Counter Flanges	**OL6420-OL6425** Metric Pipe Weld In Flanges	**OL6440-OL6445** Metric Pipe Weld In Counter Flanges

Pagina / Page	372	373	374	375
Weld in Flanges				
	OL6460-OL6465 Weld In 90° Flanges	**OL6480-OL6485** Metric Pipe Weld In 90° Flanges	**OL6500-OL6505** Weld In 90° Counter Flanges	**OL6520-OL6525** Weld In 90° Flanges

Dimensions and general characteristics may be changed at any time without prior notice.

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product
Any use of the product not in conformance with our instructions may be dangerous.



Flange SAE / SAE Flanges




Pagina / Page						
Weld in flat Flanges	376	377			378	378
						
	OL6540 Weld In Flat Flanges	**OL6560** Weld In Flat Counter Flanges			**OL6580** Poket Flat Flanges	**OL6600** Flat Flanges With Through Hole
Pagina / Page	**379**			**380**		
Oval Flanges			Check Pressure			
	OL6620 Oval Flanges With Through Hole			**OL6640-OL6645** Check Pressure SAE Flange		
Pagina / Page	**381**	**382**	**383**		**384**	**385**
Weld on Flanges						
	OL6660-OL6665 Weld on Flanges	**OL6680-OL6685** Weld on Counter Flanges	**OL6700-OL6705** Weld on Double Flanges		**OL6720-OL6725** Metric Pipe Cylindric Hole Weld On Flanges	**OL6740-OL6745** Metr. Pipe Cyl. Hole weld on counter flanges
Pagina / Page	**386**	**387**			**388**	**389**
Weld on Flanges				Blind Flanges		
	OL6760-OL6765 Weld On 90° Flanges	**OL6780-OL6785** Weld On 90° Flanges			**OL6800-OL6805** Blind Flanges	**OL6820-OL6825** Blind Counter Flanges
Pagina / Page	**390**	**391**	**392**			
Split Flanges						
	OL6840-OL6845 Cut Split Flanges	**OL6860-OL6865** Uncut Split Flanges	**OL6880-OL6885** Cut Flat Split Flanges			
Pagina / Page	**393**	**394**				
Weld on Adaptors						
	OL6900-OL6905 Weld On Adaptors for Metric Tube	**OL6920-OL6925** Weld On Adaptors				

Dimensions and general characteristics may be changed at any time without prior notice.

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product
Any use of the product not in conformance with our instructions may be dangerous.

Flange SAE / SAE Flanges

Pagina / Page	395	396
Threaded Adaptors		
	OL6940-OL6945 BSP Tapered Threaded Adaptors	**OL6960-OL6965** DIN 2353 Metric Threaded Adaptors

Pagina / Page	397	398	399	400
Pump Connect.				
	OL6980 DIN 2353 Metr. Threaded Straight	**OL7000** DIN 2353 Metr. Threaded	**OL7020** BSP Threaded 90° Connectors	**OL7040** Pump elbows with 3 fixing holes

Pagina / Page	401	402
Screws-OR, washers		
	OL7060-OL7065 Kit for SAE flanges (Metric)	**OL7080-OL7085** Kit for SAE flanges (UNC)


Dimensions and general characteristics may be changed at any time without prior notice.

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product
Any use of the product not in conformance with our instructions may be dangerous.

OL6000
OL6005

Flange Filettate BSP


BSP Threaded Flanges

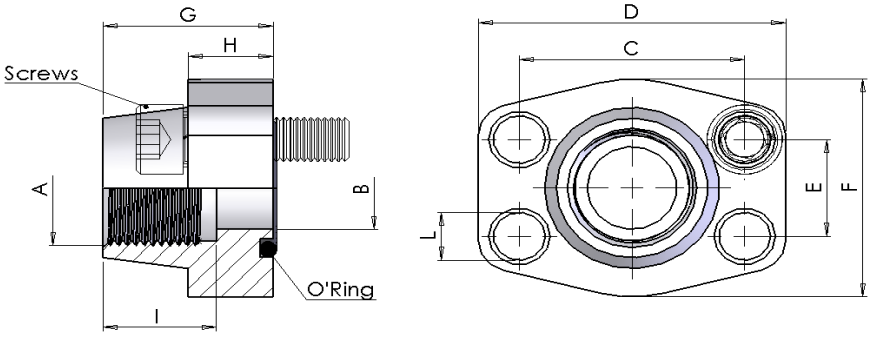

max pressure	part number	SAE	Dimensions										Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	L	Metric	Unc	type
3000 psi															
345	**OL6000-01**	1/2"	1/2" GAS	13	38,10	57	17,48	46	36	16	19	9	M8x30	5/16x1"1/4	4075
	OL6000-02	1/2"	3/8" GAS	13	38,10	57	17,48	46	36	16	19	9	M8x30	5/16x1"1/4	4075
	OL6000-03	3/4"	3/4" GAS	19	47,63	65	22,23	50	36	18	19	11	M10x35	3/8x1"1/2	4100
	OL6000-04	3/4"	1/2" GAS	13	47,63	65	22,23	50	36	18	19	11	M10x35	3/8x1"1/2	4100
	OL6000-05	1"	1" GAS	25	52,37	70	26,19	55	38	18	22	11	M10x35	3/8x1"1/2	4131
	OL6000-06	1"	3/4" GAS	19	52,37	70	26,19	55	35	21	19	11	M10x40	3/8x1"1/2	4131
276	**OL6000-07**	1"1/4	1"1/4 GAS	32	58,72	79	30,18	68	40	21	22	11,5	M10x40	7/16x1"3/4	4150
	OL6000-08	1"1/4	1" GAS	25	58,72	81	30,18	65	42	25	24	11,5	M10x40	7/16x1"3/4	4150
207	**OL6000-09**	1"1/2	1"1/2 GAS	38	69,85	93	35,71	78	45	25	24	13,5	M12x45	1/2x1"3/4	4187
	OL6000-10	1"1/2	1"1/4 GAS	32	69,85	95	35,71	78	45	27	24	13,5	M12x45	1/2x1"3/4	4187
	OL6000-11	2"	2" GAS	51	77,77	102	42,88	90	45	25	30	13,5	M12x45	1/2x1"3/4	4225
	OL6000-12	2"	1"1/2 GAS	38	77,77	102	42,88	90	45	25	26	13,5	M12x45	1/2x1"3/4	4225
172	**OL6000-13**	2"1/2	2"1/2 GAS	63	88,90	114	50,80	105	50	25	30	13,5	M12x45	1/2x1"3/4	4275
173	**OL6000-14**	2"1/2	2" GAS	51	88,90	114	50,80	105	50	25	30	13,5	M12x45	1/2x1"3/4	4275
138	**OL6000-15**	3"	3" GAS	73	106,38	134	61,93	124	50	27	34	17,5	M16x50	5/8x2"	4337
	OL6000-16	3"	2"1/2 GAS	63	106,38	134	61,93	124	50	27	30	17,5	M16x50	5/8x2"	4337
34	**OL6000-17**	3"1/2	3"1/2 GAS	89	120,65	152	69,85	136	48	27	34	17,5	M16x50	5/8x2"	4387
	OL6000-18	3"1/2	3" GAS	73	120,65	152	69,85	136	48	27	34	17,5	M16x50	5/8x2"	4387
	OL6000-19	4"	4" GAS	99	130,18	162	77,77	146	48	27	34	17,5	M16x50	5/8x2"	4437
6000 psi															
414	**OL6005-05**	1/2"	1/2" GAS	13	40,49	57	18,24	46	36	16	19	9	M8x30	5/16x1"1/4	4075
	OL6005-06	1/2"	3/8" GAS	13	40,49	57	18,24	46	36	16	19	9	M8x30	5/16x1"1/4	4075
	OL6005-07	3/4"	3/4" GAS	19	50,80	71	23,80	55	35	21	22	11	M10x40	3/8x1"1/2	4100
	OL6005-08	3/4"	1/2" GAS	13	50,80	71	23,80	55	35	21	22	11	M10x40	3/8x1"1/2	4100
	OL6005-09	1"	1" GAS	25	57,15	81	27,76	65	42	25	24	13	M12x45	7/16x1"3/4	4131
	OL6005-10	1"	3/4" GAS	19	57,15	81	27,76	65	42	25	24	13	M12x45	7/16x1"3/4	4131
	OL6005-11	1"1/4	1"1/4 GAS	32	66,68	95	31,75	78	45	27	25	15	M14x45	1/2x1"3/4	4150
	OL6005-12	1"1/4	1" GAS	25	66,68	95	31,75	78	45	27	25	15	M14x45	1/2x1"3/4	4150
	OL6005-13	1"1/2	1"1/2 GAS	38	79,38	112	36,50	94	50	30	28	17	M16x50	5/8x2"	4187
	OL6005-14	1"1/2	1"1/4 GAS	32	79,38	112	36,50	94	50	30	28	17	M16x50	5/8x2"	4187
	OL6005-15	2"	2" GAS	51	96,82	134	44,45	114	65	37	30	21	M20x70	3/4x2"1/2	4225
	OL6005-16	2"	1"1/2 GAS	38	96,82	134	44,45	114	65	37	30	21	M20x70	3/4x2"1/2	4225
	OL6005-17	2"1/2	2"1/2 GAS	63	123,80	180	58,70	152	80	45	32	26	M24x80	-	4275
	OL6005-18	3"	3" GAS	73	152,40	208	71,40	178	90	55	40	33	M30x100	-	4337

OL6020 Controflange Filettate
OL6025 BSP


BSP Threaded Counter-Flanges

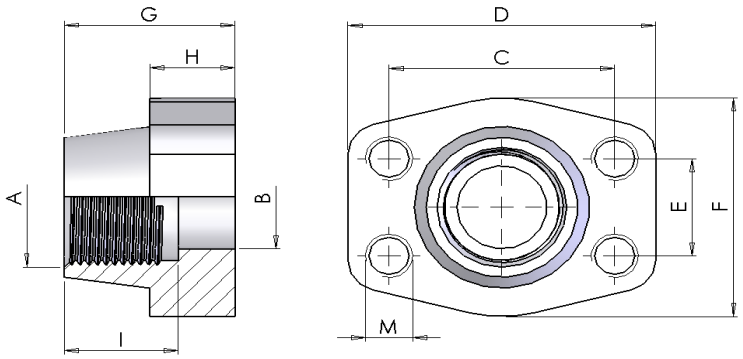

max pressure	part number	SAE	Dimensions									Metric	Unc	
bar		size	A	B	C	D	E	F	G	H	I	M		
3000 psi														
345	**OL6020-01**	1/2"	1/2" GAS	13	38,10	57	17,48	46	36	16	19	M8	5/16	
	OL6020-02	1/2"	3/8" GAS	13	38,10	57	17,48	46	36	16	19	M8	5/16	
	OL6020-03	3/4"	3/4" GAS	19	47,63	65	22,23	50	36	18	19	M10	3/8	
	OL6020-04	3/4"	1/2" GAS	13	47,63	65	22,23	50	36	18	19	M10	3/8	
	OL6020-05	1"	1" GAS	25	52,37	70	26,19	55	38	18	22	M10	3/8	
	OL6020-06	1"	3/4" GAS	19	52,37	70	26,19	55	35	21	19	M10	3/8	
276	**OL6020-07**	1"1/4	1"1/4 GAS	32	58,72	79	30,18	68	40	21	22	M10	7/16	
	OL6020-08	1"1/4	1" GAS	25	58,72	81	30,18	65	42	25	24	M10	7/16	
207	**OL6020-09**	1"1/2	1"1/2 GAS	38	69,85	93	35,71	78	45	25	24	M12	1/2	
	OL6020-10	1"1/2	1"1/4 GAS	32	69,85	95	35,71	78	45	27	24	M12	1/2	
	OL6020-11	2"	2" GAS	51	77,77	102	42,88	90	45	25	30	M12	1/2	
	OL6020-12	2"	1"1/2 GAS	38	77,77	102	42,88	90	45	25	26	M12	1/2	
172	**OL6020-13**	2"1/2	2"1/2 GAS	63	88,90	114	50,80	105	50	25	30	M12	1/2	
173	**OL6020-14**	2"1/2	2" GAS	51	88,90	114	50,80	105	50	25	30	M12	1/2	
138	**OL6020-15**	3"	3" GAS	73	106,38	134	61,93	124	50	27	34	M16	5/8	
	OL6020-16	3"	2"1/2 GAS	63	106,38	134	61,93	124	50	27	30	M16	5/8	
34	**OL6020-17**	3"1/2	3"1/2 GAS	89	120,65	152	69,85	136	48	27	34	M16	5/8	
	OL6020-18	3"1/2	3" GAS	73	120,65	152	69,85	136	48	27	34	M16	5/8	
	OL6020-19	4"	4" GAS	99	130,18	162	77,77	146	48	27	34	M16	5/8	
6000 psi														
414	**OL6025-01**	1/2"	1/2" GAS	13	40,49	57	18,24	46	36	16	19,0	M8	5/16	
	OL6025-02	1/2"	3/8" GAS	13	40,49	57	18,24	46	36	16	19,0	M8	5/16	
	OL6025-03	3/4"	3/4" GAS	19	50,80	71	23,80	55	35	21	22,0	M10	3/8	
	OL6025-04	3/4"	1/2" GAS	13	50,80	71	23,80	55	35	21	22,0	M10	3/8	
	OL6025-05	1"	1" GAS	25	57,15	81	27,76	65	42	25	24,0	M12	7/16	
	OL6025-06	1"	3/4" GAS	19	57,15	81	27,76	65	42	25	24,0	M12	7/16	
	OL6025-07	1"1/4	1"1/4 GAS	32	66,68	95	31,75	78	45	27	25,0	M14	1/2	
	OL6025-08	1"1/4	1" GAS	25	66,68	95	31,75	78	45	27	25,0	M14	1/2	
	OL6025-09	1"1/2	1"1/2 GAS	38	79,38	112	36,50	94	50	30	28,0	M16	5/8	
	OL6025-10	1"1/2	1"1/4 GAS	32	79,38	112	36,50	94	50	30	28,0	M16	5/8	
	OL6025-11	2"	2" GAS	51	96,82	134	44,45	114	65	37	30,0	M20	3/4	
	OL6025-12	2"	1"1/2 GAS	38	96,82	134	44,45	114	65	37	30,0	M20	3/4	
	OL6025-13	2"1/2	2"1/2 GAS	63	123,80	180	58,70	152	80	45	32,0	M24	-	
	OL6025-14	3"	3" GAS	73	152,40	208	71,40	178	90	55	40,0	M30	-	

OL6040 Flange Piatte Filettate
OL6045 BSP


BSP Threaded Flat Flanges

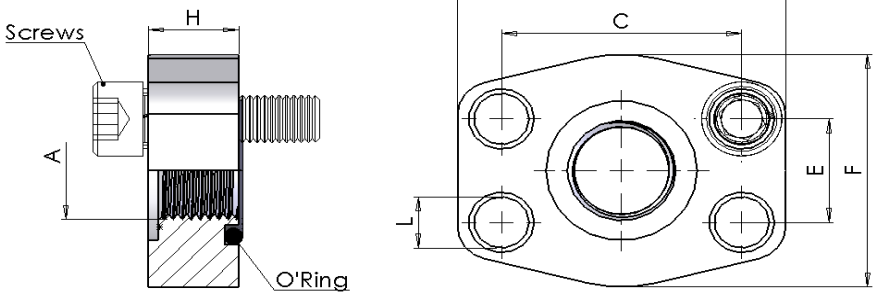

max pressure	part number	SAE	Dimensions							Viti Screws		OR
bar		size	A	C	D	E	F	H	L	Metric	Unc	type
3000 psi												
345	**OL6040-01**	3/4"	3/4" GAS	47,63	65	22,23	50	15	11	M10x35	3/8x1"1/2	4100
	OL6040-02	3/4"	1/2" GAS	47,63	65	22,23	50	15	11	M10x35	3/8x1"1/2	4100
300	**OL6040-03**	1"	1" GAS	52,37	70	26,19	60	19	11	M10x35	3/8x1"1/2	4131
	OL6040-04	1"	3/4" GAS	52,37	70	26,19	60	19	11	M10x35	3/8x1"1/2	4131
276	**OL6040-05**	1"1/4	1"1/4 GAS	58,72	79	30,18	68	19	11,5	M10x40	7/16x1"3/4	4150
	OL6040-06	1"1/4	1" GAS	58,72	79	30,18	68	19	11,5	M10x40	7/16x1"3/4	4150
207	**OL6040-07**	1"1/2	1"1/2 GAS	69,85	93	35,71	78	19	13,5	M12x45	1/2x1"3/4	4187
	OL6040-08	1"1/2	1"1/4 GAS	69,85	93	35,71	78	19	13,5	M12x45	1/2x1"3/4	4187
	OL6040-09	2"	2" GAS	77,77	102	42,88	90	19	13,5	M12x45	1/2x1"3/4	4225
	OL6040-10	2"	1"1/2 GAS	77,77	102	42,88	90	19	13,5	M12x45	1/2x1"3/4	4225
172	**OL6040-11**	2"1/2	2"1/2 GAS	88,90	114	50,80	105	19	13,5	M12x45	1/2x1"3/4	4275
	OL6040-12	2"1/2	2" GAS	88,90	114	50,80	105	19	13,5	M12x45	1/2x1"3/4	4275
138	**OL6040-13**	3"	3" GAS	106,38	134	61,83	124	23	17,5	M16x50	5/8x2"	4337
	OL6040-14	3"	2"1/2 GAS	106,38	134	61,83	124	23	17,5	M16x50	5/8x2"	4337
34	**OL6040-15**	3"1/2	3"1/2 GAS	120,65	152	69,85	136	21	17,5	M16x50	5/8x2"	4387
	OL6040-16	3"1/2	3" GAS	120,65	152	69,85	136	21	17,5	M16x50	5/8x2"	4387
	OL6040-17	4"	4" GAS	130,18	162	77,77	146	24	17,5	M16x50	5/8x2"	4437
	OL6040-18	4"	3"1/2 GAS	130,18	162	77,77	146	24	17,5	M16x50	5/8x2"	4437
6000 psi												
414	**OL6045-01**	3/4"	3/4" GAS	50,80	71	23,80	60	19	11	M10x35	3/8x1"1/2	4100
	OL6045-02	3/4"	1/2" GAS	50,80	71	23,80	60	19	11	M10x35	3/8x1"1/2	4100
	OL6045-03	1"	1" GAS	57,15	81	27,76	70	23	13	M12x45	7/16x1"3/4	4131
	OL6045-04	1"	3/4" GAS	57,15	81	27,76	70	23	13	M12x45	7/16x1"3/4	4131
	OL6045-05	1"1/4	1"1/4 GAS	66,68	95	31,75	78	26	15	M14x45	1/2x1"3/4	4150
	OL6045-06	1"1/4	1" GAS	66,68	95	31,75	78	26	15	M14x45	1/2x1"3/4	4150
	OL6045-07	1"1/2	1"1/2 GAS	79,38	112	36,50	94	29	17	M16x50	5/8x2"	4187
	OL6045-08	1"1/2	1"1/4 GAS	79,38	112	36,50	94	29	17	M16x50	5/8x2"	4187
	OL6045-09	2"	2" GAS	96,82	134	44,45	114	28	21	M20x60	3/4x2"1/2	4225
	OL6045-10	1"1/2	1"1/2 GAS	96,82	134	44,45	114	28	21	M20x60	3/4x2"1/2	4225

OL6060 OL6065 Doppie Flange Filettate BSP

BSP Threaded Double Flanges

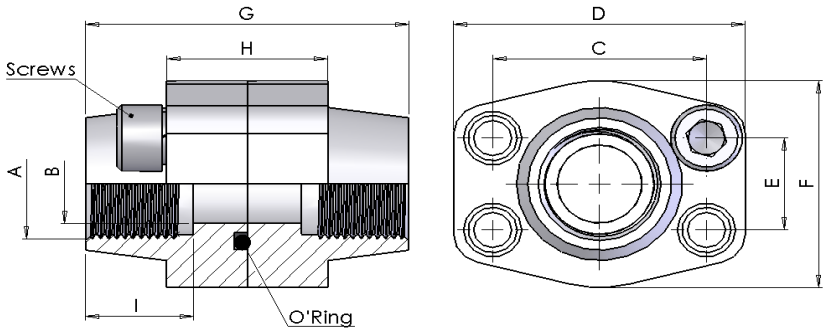


max pressure	part number	SAE	Dimensions									Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	Metric	Unc	type
3000 psi														
345	**OL6060-01**	1/2"	1/2" GAS	13	38,10	57	17,48	46	72	32	19	M8x30	5/16x1"1/4	4075
	OL6060-02	1/2"	3/8" GAS	13	38,10	57	17,48	46	72	32	19	M8x30	5/16x1"1/4	4075
	OL6060-03	3/4"	3/4" GAS	19	47,63	65	22,23	50	72	36	19	M10x35	3/8x1"1/2	4100
	OL6060-04	3/4"	1/2" GAS	13	47,63	65	22,23	50	72	36	19	M10x35	3/8x1"1/2	4100
	OL6060-05	1"	1" GAS	25	52,37	70	26,19	55	46	36	22	M10x40	3/8x1"1/2	4131
	OL6060-06	1"	3/4" GAS	19	52,37	70	26,19	55	70	42	19	M10x40	3/8x1"1/2	4131
276	**OL6060-07**	1"1/4	1"1/4 GAS	32	58,72	79	30,18	68	82	42	22	M10x40	7/16x1"3/4	4150
	OL6060-08	1"1/4	1" GAS	25	58,72	81	30,18	65	84	50	24	M12x45	7/16x1"3/4	4150
207	**OL6060-09**	1"1/2	1"1/2 GAS	38	69,85	93	35,71	78	90	50	24	M12x45	1/2x1"3/4	4187
	OL6060-10	1"1/2	1"1/4 GAS	32	69,85	95	35,71	78	90	54	24	M12x45	1/2x1"3/4	4187
	OL6060-11	2"	2" GAS	51	77,77	102	42,88	90	90	50	30	M12x45	1/2x1"3/4	4225
	OL6060-12	2"	1"1/2 GAS	38	77,77	102	42,88	90	90	50	26	M12x45	1/2x1"3/4	4225
172	**OL6060-13**	2"1/2	2"1/2 GAS	63	88,90	114	50,80	105	100	50	30	M12x45	1/2x1"3/4	4275
	OL6060-14	2"1/2	2" GAS	51	88,90	114	50,80	105	100	50	30	M16x50	1/2x1"3/4	4275
138	**OL6060-15**	3"	3" GAS	73	106,38	134	61,93	124	100	54	34	M16x50	5/8"x2	4337
	OL6060-16	3"	2"1/2 GAS	63	106,38	134	61,93	124	100	54	30	M16x50	5/8"x2	4337
34	**OL6060-17**	3"1/2	3"1/2 GAS	89	120,65	152	69,85	136	96	54	34	M16x50	5/8"x2	4387
	OL6060-18	3"1/2	3" GAS	73	120,65	152	69,85	136	96	54	34	M16x50	5/8"x2	4387
	OL6060-19	4"	4" GAS	99	130,18	162	77,77	146	96	54	34	M16x50	5/8"x2	4437
	OL6060-20	4"	3"1/2 GAS	89	130,18	162	77,77	146	96	54	34	M16x50	5/8"x2	4437
6000 psi														
414	**OL6065-01**	1/2"	1/2" GAS	13	40,49	57	18,24	46	72	32	19	M8x30	5/16x1"1/4	4075
	OL6065-02	1/2"	3/8" GAS	13	40,49	57	18,24	46	72	32	19	M8x30	5/16x1"1/4	4075
	OL6065-03	3/4"	3/4" GAS	19	50,80	71	23,80	55	70	42	19	M10x40	3/8x1"1/2	4100
	OL6065-04	3/4"	1/2" GAS	13	50,80	71	23,80	55	70	42	19	M10x40	3/8x1"1/2	4100
	OL6065-05	1"	1" GAS	25	57,15	81	27,76	65	84	50	22	M12x45	7/16x1"3/4	4131
	OL6065-06	1"	3/4" GAS	19	57,15	81	27,76	65	84	50	22	M12x45	7/16x1"3/4	4131
	OL6065-07	1"1/4	1"1/4 GAS	32	66,68	95	31,75	78	90	54	23	M14x45	1/2x1"3/4	4150
	OL6065-08	1"1/4	1" GAS	25	66,68	95	31,75	78	90	54	23	M14x45	1/2x1"3/4	4150
	OL6065-09	1"1/2	1"1/2 GAS	38	79,38	112	36,50	94	100	60	26	M16x50	5/8"x2	4187
	OL6065-10	1"1/2	1"1/4 GAS	32	79,38	112	36,50	94	100	60	26	M16x50	5/8"x2	4187
	OL6065-11	2"	2" GAS	51	96,82	134	44,45	114	130	74	30	M20x70	3/4x2"1/2	4225
	OL6065-12	2"	1"1/2 GAS	38	96,82	134	44,45	114	130	74	30	M20x70	3/4x2"1/2	4225

OL6080
OL6085

Flange 90° Filettate BSP

BSP Threaded 90° Flanges

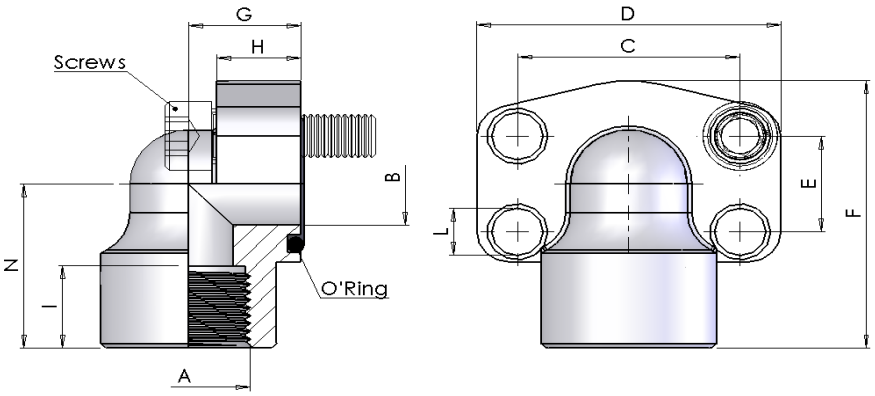


max pressure	part number	SAE	Dimensions											Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	L	N	Metric	Unc	type
3000 psi																
345	**OL6080-01**	1/2"	1/2" GAS	13	38,10	54	17,48	60	20	16	19	9	37	M8x30	5/16x1"1/4	4075
	OL6080-02	1/2"	3/8" GAS	13	38,10	54	17,48	60	20	16	19	9	37	M8x30	5/16x1"1/4	4075
	OL6080-03	3/4"	3/4" GAS	19	47,63	65	22,23	63	24	18	19	11	38	M10x35	3/8x1"1/2	4100
	OL6080-04	3/4"	1/2" GAS	19	47,63	65	22,23	63	24	18	19	11	38	M10x35	3/8x1"1/2	4100
	OL6080-05	1"	1" GAS	25	52,37	70	26,19	70	28	19	20	11	43	M10x35	3/8x1"1/2	4131
	OL6080-06	1"	3/4" GAS	25	52,37	70	26,19	70	28	19	20	11	43	M10x40	3/8x1"1/2	4131
276	**OL6080-07**	1"1/4	1"1/4 GAS	32	58,72	79	30,18	85	34	21	22	11,5	51	M10x40	7/16x1"3/4	4150
	OL6080-08	1"1/4	1" GAS	32	58,72	79	30,18	85	34	21	22	11,5	51	M10x40	7/16x1"3/4	4150
207	**OL6080-09**	1"1/2	1"1/2 GAS	38	69,85	93	35,71	95	38	25	25	13,5	56	M12x45	1/2x1"3/4	4187
	OL6080-10	1"1/2	1"1/4 GAS	38	69,85	93	35,71	95	38	25	25	13,5	56	M12x45	1/2x1"3/4	4187
	OL6080-11	2"	2" GAS	51	77,77	110	42,88	110	42	25	28	13,5	65	M12x45	1/2x1"3/4	4225
	OL6080-12	2"	1"1/2 GAS	51	77,77	110	42,88	110	42	25	28	13,5	65	M12x45	1/2x1"3/4	4225
6000 psi																
414	**OL6085-01**	1/2"	1/2" GAS	13	40,49	54	18,24	60	20	16	19	9	37	M8x30	5/16x1"1/4	4075
	OL6085-02	1/2"	3/8" GAS	13	40,49	54	18,24	60	20	16	19	9	37	M8x30	5/16x1"1/4	4075
	OL6085-03	3/4"	3/4" GAS	19	50,80	70	23,80	70	28	19	20	11	43	M10x35	3/8x1"1/2	4100
	OL6085-04	3/4"	1/2" GAS	19	50,80	70	23,80	70	28	19	20	11	43	M10x35	3/8x1"1/2	4100
	OL6085-05	1"	1" GAS	25	57,15	79	27,76	85	34	21	22	13	51	M12x45	7/16x1"3/4	4131
	OL6085-06	1"	3/4" GAS	25	57,15	79	27,76	85	34	21	22	13	51	M12x45	7/16x1"3/4	4131
	OL6085-07	1"1/4	1"1/4 GAS	32	66,68	93	31,75	95	38	25	25	15	56	M14x45	1/2x1"3/4	4150
	OL6085-08	1"1/4	1" GAS	32	66,68	93	31,75	95	38	25	25	15	56	M14x45	1/2x1"3/4	4150
	OL6085-09	1"1/2	1"1/2 GAS	38	79,38	110	36,50	110	42	25	28	17	65	M16x50	5/8x2"	4187
	OL6085-10	1"1/2	1"1/4 GAS	38	79,38	110	36,50	110	42	25	28	17	65	M16x50	5/8x2"	4187
	OL6085-11	2"	2" GAS	51	96,82	134	44,45	132	45	35	33	21	75	M20x70	3/4x2"1/2	4225
	OL6085-12	2"	1"1/2 GAS	51	96,82	134	44,45	132	45	35	33	21	75	M20x70	3/4x2"1/2	4225

OL6100
OL6105

Flange 90° Filettate BSP


BSP Threaded 90° Flanges

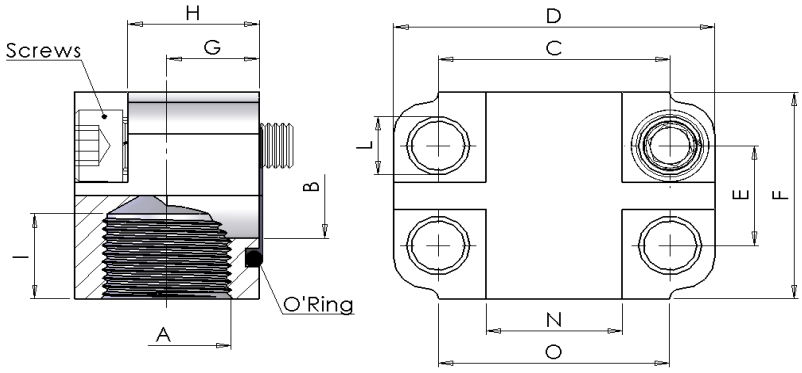

max pressure	part number	SAE	Dimensions												Viti Screws	OR
bar		size	A	B	C	D	E	F	G	H	I	L	N	O	Metric	type
	3000 psi															
345	**OL6100-01**	3/4"	3/4" GAS	19	47,63	66	22,23	46	19	27	19	11	28	48	M10x45	4100
	OL6100-02	1"	1" GAS	25	52,37	71	26,19	55	22	34	19	11	32	50	M10x50	4131
276	**OL6100-03**	1"1/4	1"1/4 GAS	32	58,72	81	30,18	65	27	42	22	12	35	60	M10x60	4150
207	**OL6100-04**	1"1/2	1"1/2 GAS	38	69,85	95	35,71	75	32	50	24	14	42	70	M12x70	4187
	OL6100-05	2"	2" GAS	51	77,77	112	42,88	90	40	63	26	14	50	80	M12x80	4225
172	**OL6100-06**	2"1/2	2"1/2 GAS	63	88,90	120	50,80	120	53	99	30	14	-	-	-	4275
	6000 psi															
414	**OL6105-01**	3/4"	3/4" GAS	19	50,80	71	23,80	55	22	34	22	11	32	50	M10x50	4100
	OL6105-02	1"	1" GAS	25	57,15	81	27,76	65	27	42	24	13	35	60	M12x60	4131
	OL6105-03	1"1/4	1"1/4 GAS	32	66,68	95	31,75	75	32	50	25	15	42	70	M14x70	4150
	OL6105-04	1"1/2	1"1/2 GAS	38	79,38	112	36,50	90	40	63	28	17	50	80	M16x90	4187

OL6120 Flange a tenuta conica a 60°
OL6125 filettate BSP


60° Tapered seat BSP threaded flanges

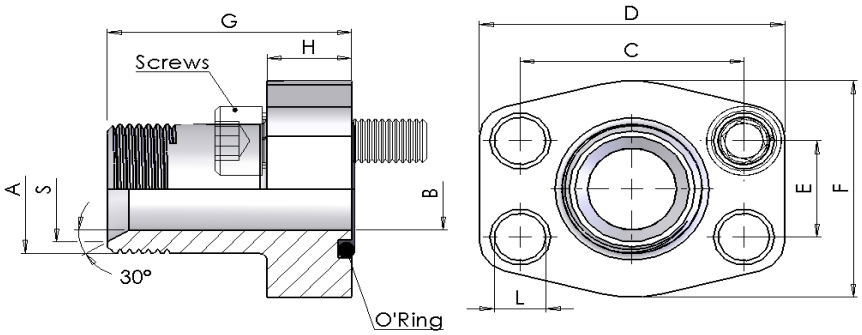

max pressure	part number	SAE	Dimensions										Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	L	S	Metric	Unc	type
	3000 psi														
345	**OL6120-01**	1/2"	1/2" GAS	12	38,10	54	17,48	46	52	13	9,0	17,5	M8x30	5/16x1"1/4	4075
	OL6120-02	1/2"	3/8" GAS	9	38,10	54	17,48	46	52	13	9,0	14,0	M8x30	5/16x1"1/4	4075
	OL6120-03	3/4"	3/4" GAS	17	47,63	65	22,23	50	60	14	11,5	22,9	M10x35	3/8x1"1/2	4100
	OL6120-04	3/4"	1/2" GAS	12	47,63	65	22,23	50	60	14	11,5	17,5	M10x35	3/8x1"1/2	4100
	OL6120-05	1"	1" GAS	22	52,37	70	26,19	55	63	16	11,5	28,7	M10x35	3/8x1"1/2	4131
	OL6120-06	1"	3/4" GAS	17	52,37	70	26,19	55	63	16	11,5	22,9	M10x40	3/8x1"1/2	4131
276	**OL6120-07**	1"1/4	1"1/4 GAS	29	58,72	79	30,18	68	65	14	11,5	36,8	M10x35	7/16x1"3/4	4150
	OL6120-08	1"1/4	1" GAS	22	58,72	79	30,18	68	65	14	11,5	28,7	M10x35	7/16x1"3/4	4150
207	**OL6120-09**	1"1/2	1"1/2 GAS	34	69,85	94	35,71	78	70	16	13,5	42,7	M12x35	1/2x1"3/4	4187
	OL6120-10	1"1/2	1"1/4 GAS	29	69,85	94	35,71	78	70	16	13,5	36,8	M12x35	1/2x1"3/4	4187
	6000 psi														
414	**OL6125-01**	1/2"	1/2" GAS	12	40,49	56	18,24	48	60	16	9	17,5	M8x30	5/16x1"1/4	4075
	OL6125-02	1/2"	3/8" GAS	9	40,49	56	18,24	48	60	16	9	14,0	M8x30	5/16x1"1/5	4075
	OL6125-03	3/4"	3/4" GAS	17	50,80	71	23,80	60	73	19	12	22,9	M10x40	3/8x1"1/2	4100
	OL6125-04	3/4"	1/2" GAS	12	50,80	71	23,80	60	73	19	12	17,5	M10x40	3/8x1"1/3	4100
	OL6125-05	1"	1" GAS	22	57,15	81	27,76	70	82	24	13	28,7	M12x45	7/16x1"3/4	4131
	OL6125-06	1"	3/4" GAS	17	57,15	81	27,76	70	82	24	13	22,9	M12x45	7/16x1"3/5	4131
	OL6125-07	1"1/4	1"1/4 GAS	29	66,68	95	31,75	78	92	27	15	36,8	M14x45	1/2x1"3/4	4150
	OL6125-08	1"1/4	1" GAS	22	66,68	95	31,75	78	92	27	15	28,7	M14x45	1/2x1"3/5	4150
	OL6125-09	1"1/2	1"1/2 GAS	34	79,38	113	36,50	95	96	30	17	42,7	M16x50	5/8x2"	4187
	OL6125-10	1"1/2	1"1/4 GAS	29	79,38	113	36,50	95	96	30	17	36,8	M16x50	5/8x2"	4187

OL6140 OL6145 Flange a 90° a tenuta conica 60° filettate BSP


90° Flanges with 60° tapered seat and BSP thread

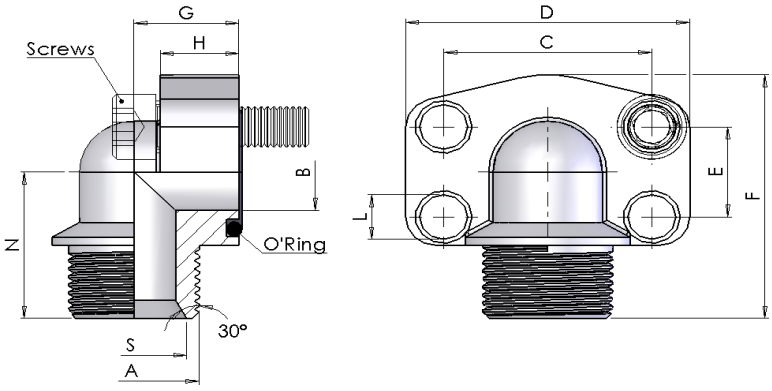

max pressure	part number	SAE	Dimensions											Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	L	N	S	Metric	Unc	type
	3000 psi															
345	**OL6140-01**	1/2"	1/2" GAS	11,5 / 13	38,10	54	17,48	61	20	16	9	38	17,5	M8x30	5/16x1"1/4	4075
	OL6140-02	1/2"	3/8" GAS	8,5 / 13	38,10	54	17,48	61	20	16	9	38	14,0	M8x30	5/16x1"1/4	4075
	OL6140-03	3/4"	3/4" GAS	17 / 19	47,63	65	22,23	64	24	18	11	39	22,9	M10x35	3/8x1"1/2	4100
	OL6140-04	1"	1" GAS	22 / 25	52,37	70	26,19	70	28	19	11	43	28,7	M10x35	3/8x1"1/2	4131
276	**OL6140-05**	1"1/4	1"1/4 GAS	28,5 / 32	58,72	79	30,18	85	34	21	12	51	36,8	M10x35	7/16x1"3/4	4150
207	**OL6140-06**	1"1/2	1"1/2 GAS	34 / 38	69,85	93	35,71	96	38	25	14	56	42,7	M12x35	1/2x1"3/4	4187
	6000 psi															
414	**OL6145-01**	1/2"	1/2" GAS	11,5 / 13	40,49	54	18,24	61	20	16	9	38	18	M8x30	5/16x1"1/4	4075
	OL6145-02	1/2"	3/8" GAS	8,5 / 13	40,49	54	18,24	61	20	16	9	38	14	M8x30	5/16x1"1/4	4075
	OL6145-03	3/4"	3/4" GAS	17 / 19	50,80	70	23,80	70	28	19	11	43	23	M10x40	3/8x1"1/2	4100
	OL6145-04	1"	1" GAS	22 / 25	57,15	79	27,76	85	34	21	13	51	29	M12x45	7/16x1"3/4	4131
	OL6145-05	1"1/4	1"1/4 GAS	28,5 / 32	66,68	93	31,75	96	38	25	15	56	37	M14x45	1/2x1"3/4	4150
	OL6145-06	1"1/2	1"1/2 GAS	34 / 38	79,38	110	36,50	110	42	25	17	65	43	M16x50	5/8x2"	4187

OL6160 OL6165 Flange filettate Metriche con attacco DIN 2353


DIN 2353 Metric threaded flanges

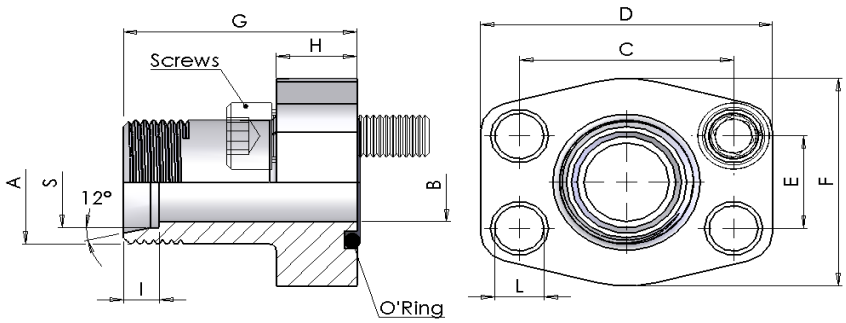

max pressure	part number	SAE	Dimensions											Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	L	S	Metric	Unc	type
		3000 psi														
	OL6160-01	1/2"	M22x1,5	12	38,10	54	17,48	46	52	13	7	9,0	15	M8x30	5/16x1"1/4	4075
345	**OL6160-02**	3/4"	M30x2	19	47,63	65	22,23	50	60	14	8	11,5	22	M10x30	3/8x1"1/2	4100
	OL6160-03	1"	M36x2	24	52,37	70	26,19	55	63	16	8	11,5	28	M10x35	3/8x1"1/2	4131
276	**OL6160-04**	1"1/4	M45x2	29	58,72	79	30,18	68	65	14	11	11,5	35	M10x35	7/16x1"3/4	4150
207	**OL6160-05**	1"1/2	M52x2	36	69,85	94	35,71	78	70	16	11	13,5	42	M12x35	1/2x1"3/4	4187
		6000 psi														
	OL6165-01	1/2"	M24x1,5	12	40,49	56	18,24	48	60	16	9	9,0	16	M8x30	5/16x1"1/4	4075
	OL6165-02	3/4"	M36x2	19	50,80	71	23,80	60	73	19	12	11,5	25	M10x40	3/8x1"1/2	4100
414	**OL6165-03**	1"	M42x2	25	57,15	81	27,76	70	82	24	14	13,0	30	M12x45	7/16x1"3/4	4131
	OL6165-04	1"1/4	M52x2	29	66,68	95	31,75	78	92	27	16	15,0	38	M14x45	1/2x1"3/4	4150
	OL6165-05	1"1/2	M52x2	32	79,38	113	36,50	95	96	30	16	17,0	38	M16x50	5/8x2"	4187

OL6180 OL6185 Flange 90° filettate Metriche con attacco DIN 2353

DIN 2353 Metric threaded 90° flanges

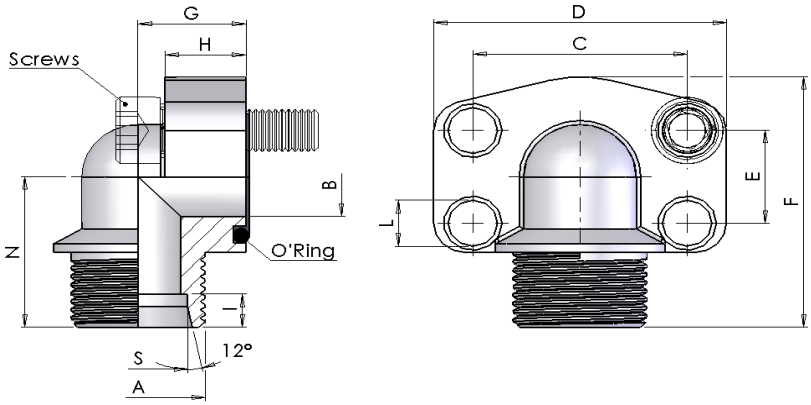


max pressure	part number	SAE	Dimensions												Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	L	N	S	Metric	Unc	type
	3000 psi																
345	**OL6180-01**	1/2"	M22x1,5	12	38,10	54	17,48	60	20	16	7,0	9,0	37	15	M8x30	5/16x1"1/4	4075
	OL6180-02	3/4"	M30x2	19	47,63	65	22,23	65	24	18	7,5	11,0	40	22	M10x35	3/8x1"1/2	4100
	OL6180-03	1"	M36x2	25	52,37	70	26,19	70	28	19	12,0	11,0	43	28	M10x35	3/8x1"1/2	4131
276	**OL6180-04**	1"1/4	M45x2	32	58,72	79	30,18	86	34	21	10,5	11,5	52	35	M10x40	7/16x1"3/4	4150
207	**OL6180-05**	1"1/2	M52x2	38	69,85	93	35,71	95	38	25	11,0	13,5	56	42	M12x45	1/2x1"3/4	4187
	6000 psi																
414	**OL6185-01**	1/2"	M24x1,5	12	40,49	54	18,24	60	20	16	8,5	9	37	16	M8x30	5/16x1"1/4	4075
	OL6185-02	3/4"	M36x2	19	50,80	70	23,80	70	28	19	12,0	11	43	25	M10x35	3/8x1"1/2	4100
	OL6185-03	1"	M42x2	25	57,15	79	27,76	85	34	21	13,5	13	52	30	M12x45	7/16x1"3/4	4131
	OL6185-04	1"1/4	M52x2	32	66,68	93	31,75	95	38	25	16,0	15	56	38	M14x45	1/2x1"3/4	4150
	OL6185-05	1"1/2	M52x2	38	79,38	110	36,50	110	42	25	16,0	17	65	38	M16x50	5/8x2"	4187

OL6200
OL6205

Flange Filettate NPT


NPT Threaded Flanges

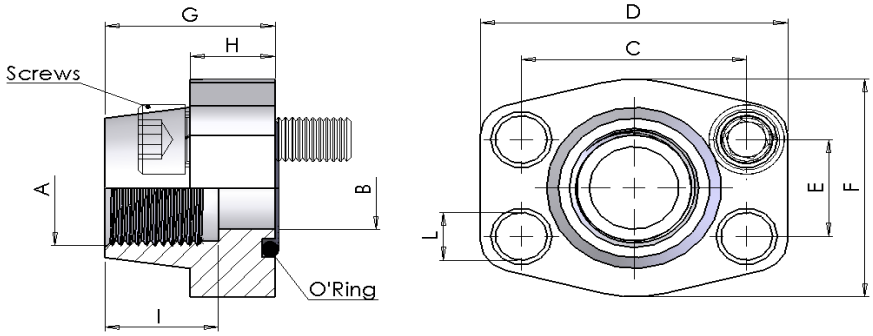

max pressure	part number	SAE	Dimensions										Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	L	Metric	Unc	type
	3000 psi														
345	**OL6200-01**	1/2"	1/2" NPT	13	38,10	57	17,48	46	36	16	19	9	M8x30	5/16x1"1/4	4075
	OL6200-02	1/2"	3/8" NPT	13	38,10	57	17,48	46	36	16	19	9	M8x30	5/16x1"1/4	4075
	OL6200-03	3/4"	3/4" NPT	19	47,63	65	22,23	50	36	18	19	11	M10x35	3/8x1"1/2	4100
	OL6200-04	3/4"	1/2" NPT	13	47,63	65	22,23	50	36	18	19	11	M10x35	3/8x1"1/2	4100
	OL6200-05	1"	1" NPT	25	52,37	70	26,19	55	38	18	22	11	M10x35	3/8x1"1/2	4131
	OL6200-06	1"	3/4" NPT	19	52,37	70	26,19	55	35	21	19	11	M10x40	3/8x1"1/2	4131
276	**OL6200-07**	1"1/4	1"1/4 NPT	32	58,72	79	30,18	68	41	21	22	11,5	M10x40	7/16x1"3/4	4150
	OL6200-08	1"1/4	1" NPT	25	58,72	81	30,18	65	42	25	24	11,5	M10x40	7/16x1"3/4	4150
207	**OL6200-09**	1"1/2	1"1/2 NPT	38	69,85	93	35,71	78	45	25	24	13,5	M12x45	1/2x1"3/4	4187
	OL6200-10	1"1/2	1"1/4 NPT	32	69,85	95	35,71	78	45	27	24	13,5	M12x45	1/2x1"3/4	4187
	OL6200-11	2"	2" NPT	51	77,77	102	42,88	90	45	25	30	13,5	M12x45	1/2x1"3/4	4225
	OL6200-12	2"	1"1/2 NPT	38	77,77	102	42,88	90	45	25	26	13,5	M12x45	1/2x1"3/4	4225
172	**OL6200-13**	2"1/2	2"1/2 NPT	63	88,90	114	50,80	105	50	25	30	13,5	M12x45	1/2x1"3/4	4275
138	**OL6200-14**	3"	3" NPT	73	106,38	134	61,93	124	50	27	34	17,5	M16x50	5/8x2"	4337
34	**OL6200-15**	3"1/2	3"1/2 NPT	89	120,65	152	69,85	136	48	27	34	17,5	M16x50	5/8x2"	4387
	OL6200-16	4"	4" NPT	99	130,18	162	77,77	146	48	27	34	17,5	M16x50	5/8x2"	4437
	6000 psi														
414	**OL6205-01**	1/2"	1/2" NPT	13	40,49	57	18,24	46	36	16	19	9	M8x30	5/16x1"1/4	4075
	OL6205-02	1/2"	3/8" NPT	13	40,49	57	18,24	46	36	16	19	9	M8x30	5/16x1"1/4	4075
	OL6205-03	3/4"	3/4" NPT	19	50,80	71	23,80	55	35	21	22	11	M10x40	3/8x1"1/2	4100
	OL6205-04	3/4"	1/2" NPT	13	50,80	71	23,80	55	35	21	22	11	M10x40	3/8x1"1/2	4100
	OL6205-05	1"	1" NPT	25	57,15	81	27,76	65	42	25	24	13	M12x45	7/16x1"3/4	4131
	OL6205-06	1"	3/4" NPT	19	57,15	81	27,76	65	42	25	24	13	M12x45	7/16x1"3/4	4131
	OL6205-07	1"1/4	1"1/4 NPT	32	66,68	95	31,75	78	45	27	25	15	M14x45	1/2x1"3/4	4150
	OL6205-08	1"1/4	1" NPT	25	66,68	95	31,75	78	45	27	25	15	M14x45	1/2x1"3/4	4150
	OL6205-09	1"1/2	1"1/2 NPT	38	79,38	112	36,50	94	50	30	28	17	M16x50	5/8x2"	4187
	OL6205-10	1"1/2	1"1/4 NPT	32	79,38	112	36,50	94	50	30	28	17	M16x50	5/8x2"	4187
	OL6205-11	2"	2" NPT	51	96,82	134	44,45	114	65	37	30	21	M20x70	3/4x2"1/2	4225
	OL6205-12	2"	1"1/2 NPT	38	96,82	134	44,45	114	65	37	30	21	M20x70	3/4x2"1/2	4225
	OL6205-13	2"1/2	2"1/2 NPT	63	123,80	180	58,70	152	80	45	32	26	M24x80	-	4275
	OL6205-14	3"	3" NPT	73	152,40	208	71,40	178	90	55	40	33	M30x100	-	4337

OL6220 OL6225 Controflange Filettate NPT


NPT Threaded Counter-Flanges

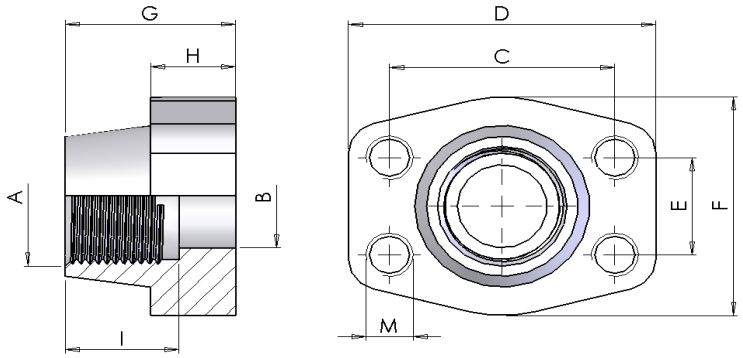

max pressure	part number	SAE	Dimensions									Metric	Unc	
bar		size	A	B	C	D	E	F	G	H	I	M		
3000 psi														
345	**OL6220-01**	1/2"	1/2" NPT	13	38,10	57	17,48	46	36	16	19	M8	5/16	
	OL6220-02	1/2"	3/8" NPT	13	38,10	57	17,48	46	36	16	19	M8	5/16	
	OL6220-03	3/4"	3/4" NPT	19	47,63	65	22,23	50	36	18	19	M10	3/8	
	OL6220-04	3/4"	1/2" NPT	13	47,63	65	22,23	50	36	18	19	M10	3/8	
	OL6220-05	1"	1" NPT	25	52,37	70	26,19	55	38	18	22	M10	3/8	
	OL6220-06	1"	3/4" NPT	19	52,37	70	26,19	55	35	21	19	M10	3/8	
276	**OL6220-07**	1"1/4	1"1/4 NPT	32	58,72	79	30,18	68	41	21	22	M10	7/16	
	OL6220-08	1"1/4	1" NPT	25	58,72	81	30,18	65	42	25	24	M10	7/16	
207	**OL6220-09**	1"1/2	1"1/2 NPT	38	69,85	93	35,71	78	45	25	24	M12	1/2	
	OL6220-10	1"1/2	1"1/4 NPT	32	69,85	95	35,71	78	45	27	24	M12	1/2	
	OL6220-11	2"	2" NPT	51	77,77	102	42,88	90	45	25	30	M12	1/2	
	OL6220-12	2"	1"1/2 NPT	38	77,77	102	42,88	90	45	25	26	M12	1/2	
172	**OL6220-13**	2"1/2	2"1/2 NPT	63	88,90	114	50,80	105	50	25	30	M12	1/2	
138	**OL6220-14**	3"	3" NPT	73	106,38	134	61,93	124	50	27	34	M16	5/8	
34	**OL6220-15**	3"1/2	3"1/2 NPT	89	120,65	152	69,85	136	48	27	34	M16	5/8	
	OL6220-16	4"	4" NPT	99	130,18	162	77,77	146	48	27	34	M16	5/8	
6000 psi														
414	**OL6225-01**	1/2"	1/2" NPT	13	40,49	57	18,24	46	36	16	19	M8	5/16	
	OL6225-02	1/2"	3/8" NPT	13	40,49	57	18,24	46	36	16	19	M8	5/16	
	OL6225-03	3/4"	3/4" NPT	19	50,80	71	23,80	55	35	21	22	M10	3/8	
	OL6225-04	3/4"	1/2" NPT	13	50,80	71	23,80	55	35	21	22	M10	3/8	
	OL6225-05	1"	1" NPT	25	57,15	81	27,76	65	42	25	24	M12	7/16	
	OL6225-06	1"	3/4" NPT	19	57,15	81	27,76	65	42	25	24	M12	7/16	
	OL6225-07	1"1/4	1"1/4 NPT	32	66,68	95	31,75	78	45	27	25	M14	1/2	
	OL6225-08	1"1/4	1" NPT	25	66,68	95	31,75	78	45	27	25	M14	1/2	
	OL6225-09	1"1/2	1"1/2 NPT	38	79,38	112	36,50	94	50	30	28	M16	5/8	
	OL6225-10	1"1/2	1"1/4 NPT	32	79,38	112	36,50	94	50	30	28	M16	5/8	
	OL6225-11	2"	2" NPT	51	96,82	134	44,45	114	65	37	30	M20	3/4	
	OL6225-12	2"	1"1/2 NPT	38	96,82	134	44,45	114	65	37	30	M20	3/4	
	OL6225-13	2"1/2	2"1/2 NPT	63	123,80	180	58,70	152	80	45	32	M24	-	
	OL6225-14	3"	3" NPT	73	152,40	208	71,40	178	90	55	40	M30	-	

OL6240 OL6245 Doppie Flange Filettate NPT

NPT Threaded Double Flanges

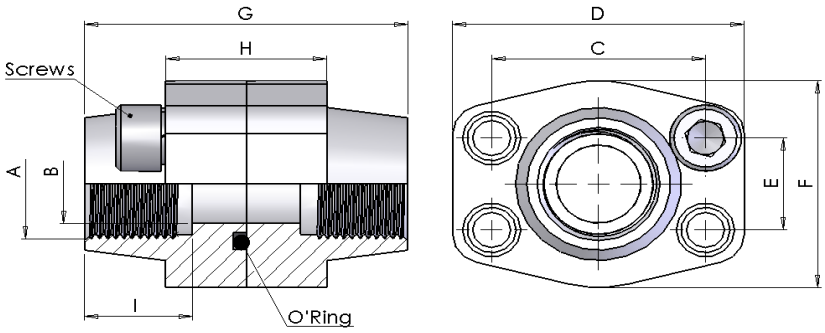


max pressure	part number	SAE	Dimensions									Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	Metric	Unc	type
3000 psi														
345	**OL6240-01**	1/2"	1/2" NPT	13	38,10	57	17,48	46	72	32	19	M8x30	5/16x1"1/4	4075
	OL6240-02	1/2"	3/8" NPT	13	38,10	57	17,48	46	72	32	19	M8x30	5/16x1"1/4	4075
	OL6240-03	3/4"	3/4" NPT	19	47,63	65	22,23	50	72	36	19	M10x35	3/8x1"1/2	4100
	OL6240-04	3/4"	1/2" NPT	13	47,63	65	22,23	50	72	36	19	M10x35	3/8x1"1/2	4100
	OL6240-05	1"	1" NPT	25	52,37	70	26,19	55	76	36	22	M10x35	3/8x1"1/2	4131
	OL6240-06	1"	3/4" NPT	19	52,37	70	26,19	55	70	42	19	M10x40	3/8x1"1/2	4131
276	**OL6240-07**	1"1/4	1"1/4 NPT	32	58,72	79	30,18	68	82	42	22	M10x40	7/16x1"3/4	4150
	OL6240-08	1"1/4	1" NPT	25	58,72	81	30,18	65	84	50	24	M10x40	7/16x1"3/4	4150
207	**OL6240-09**	1"1/2	1"1/2 NPT	38	69,85	93	35,71	78	90	50	24	M12x45	1/2x1"3/4	4187
	OL6240-10	1"1/2	1"1/4 NPT	32	69,85	95	35,71	78	90	54	24	M12x45	1/2x1"3/4	4187
	OL6240-11	2"	2" NPT	51	77,77	102	42,88	90	90	50	30	M12x45	1/2x1"3/4	4225
	OL6240-12	2"	1"1/2 NPT	38	77,77	102	42,88	90	90	50	26	M12x45	1/2x1"3/4	4225
172	**OL6240-13**	2"1/2	2"1/2 NPT	63	88,90	114	50,80	105	100	50	30	M12x45	1/2x1"3/4	4275
138	**OL6240-14**	3"	3" NPT	73	106,38	134	61,93	124	100	54	34	M16x50	5/8x2"	4337
34	**OL6240-15**	3"1/2	3"1/2 NPT	89	120,65	152	69,85	136	96	54	34	M16x50	5/8x2"	4387
	OL6240-16	4"	4" NPT	99	130,18	162	77,77	146	96	54	34	M16x50	5/8x2"	4437
6000 psi														
414	**OL6245-01**	1/2"	1/2" NPT	13	40,49	57	18,24	46	72	32	19	M8x30	5/16x1"1/4	4075
	OL6245-02	1/2"	3/8" NPT	13	40,49	57	18,24	46	72	32	19	M8x30	5/16x1"1/4	4075
	OL6245-03	3/4"	3/4" NPT	19	50,80	71	23,80	55	70	42	22	M10x40	3/8x1"1/2	4100
	OL6245-04	3/4"	1/2" NPT	13	50,80	71	23,80	55	70	42	22	M10x40	3/8x1"1/2	4100
	OL6245-05	1"	1" NPT	25	57,15	81	27,76	65	84	50	24	M12x45	7/16x1"3/4	4131
	OL6245-06	1"	3/4" NPT	19	57,15	81	27,76	65	84	50	24	M12x45	7/16x1"3/4	4131
	OL6245-07	1"1/4	1"1/4 NPT	32	66,68	95	31,75	78	90	54	25	M14x45	1/2x1"3/4	4150
	OL6245-08	1"1/4	1" NPT	25	66,68	95	31,75	78	90	54	25	M14x45	1/2x1"3/4	4150
	OL6245-09	1"1/2	1"1/2 NPT	38	79,38	112	36,50	94	100	60	28	M16x50	5/8x2"	4187
	OL6245-10	1"1/2	1"1/4 NPT	32	79,38	112	36,50	94	100	60	28	M16x50	5/8x2"	4187
	OL6245-11	2"	2" NPT	51	96,82	134	44,45	114	130	74	30	M20x70	3/4x2"1/2	4225
	OL6245-12	2"	1"1/2 NPT	38	96,82	134	44,45	114	130	74	30	M20x70	3/4x2"1/2	4225
	OL6245-13	2"1/2	2"1/2 NPT	63	123,80	180	58,70	152	160	90	32	M24x80	-	4275
	OL6245-14	3"	3" NPT	73	152,40	208	71,40	178	180	110	40	M30x100	-	4337

OL6260
OL6265

Flange 90° Filettate NPT

NPT Threaded 90° Flanges

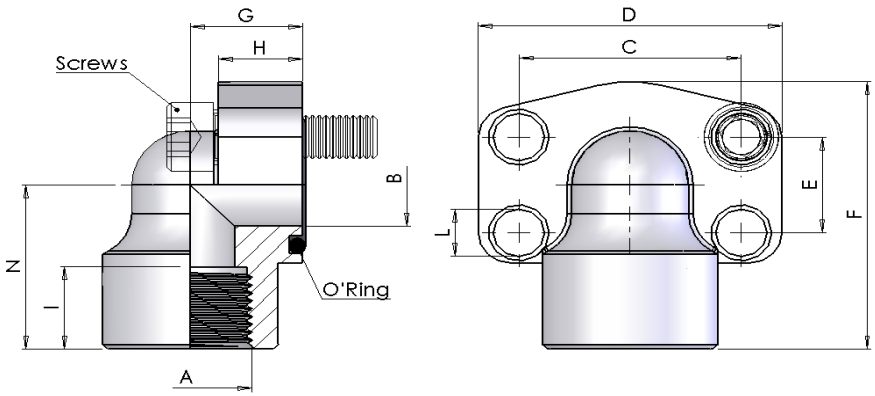


max pressure	part number	SAE	Dimensions											Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	L	N	Metric	Unc	type
3000 psi																
345	**OL6260-01**	1/2"	1/2" NPT	13	38,10	54	17,48	60	20	16	19	9	37	M8x30	5/16x1"1/4	4075
	OL6260-02	1/2"	3/8" NPT	13	38,10	54	17,48	60	20	16	19	9	37	M8x30	5/16x1"1/4	4075
	OL6260-03	3/4"	3/4" NPT	19	47,63	65	22,23	63	24	18	19	11	38	M10x35	3/8x1"1/2	4100
	OL6260-04	3/4"	1/2" NPT	19	47,63	65	22,23	63	24	18	19	11	38	M10x35	3/8x1"1/2	4100
	OL6260-05	1"	1" NPT	25	52,37	70	26,19	70	28	19	20	11	43	M10x35	3/8x1"1/2	4131
	OL6260-06	1"	3/4" NPT	25	52,37	70	26,19	70	28	19	20	11	43	M10x40	3/8x1"1/2	4131
276	**OL6260-07**	1"1/4	1"1/4 NPT	32	58,72	79	30,18	85	34	21	22	11,5	51	M10x40	7/16x1"3/4	4150
	OL6260-08	1"1/4	1" NPT	32	58,72	79	30,18	85	34	21	22	11,5	51	M10x40	7/16x1"3/4	4150
207	**OL6260-09**	1"1/2	1"1/2 NPT	38	69,85	93	35,71	95	38	25	25	13,5	56	M12x45	1/2x1"3/4	4187
	OL6260-10	1"1/2	1"1/4 NPT	38	69,85	93	35,71	95	38	25	25	13,5	56	M12x45	1/2x1"3/4	4187
	OL6260-11	2"	2" NPT	51	77,77	110	42,88	110	42	25	28	13,5	65	M12x45	1/2x1"3/4	4225
	OL6260-12	2"	1"1/2 NPT	51	77,77	110	42,88	110	42	25	28	13,5	65	M12x45	1/2x1"3/4	4225
6000 psi																
414	**OL6265-01**	1/2"	1/2" NPT	13	40,49	54	18,24	60	20	16	19	9	37	M8x30	5/16x1"1/4	4075
	OL6265-02	1/2"	3/8" NPT	13	40,49	54	18,24	60	20	16	19	9	37	M8x30	5/16x1"1/4	4075
	OL6265-03	3/4"	3/4" NPT	19	50,80	70	23,80	70	28	19	20	11	43	M10x40	3/8x1"1/2	4100
	OL6265-04	3/4"	1/2" NPT	19	50,80	70	23,80	70	28	19	20	11	43	M10x40	3/8x1"1/2	4100
	OL6265-05	1"	1" NPT	25	57,15	79	27,76	85	34	21	22	13	51	M12x45	7/16x1"3/4	4131
	OL6265-06	1"	3/4" NPT	25	57,15	79	27,76	85	34	21	22	13	51	M12x45	7/16x1"3/4	4131
	OL6265-07	1"1/4	1"1/4 NPT	32	66,68	93	31,75	95	38	25	25	15	56	M14x45	1/2x1"3/4	4150
	OL6265-08	1"1/4	1" NPT	32	66,68	93	31,75	95	38	25	25	15	56	M14x45	1/2x1"3/4	4150
	OL6265-09	1"1/2	1"1/2 NPT	38	79,38	110	36,50	110	42	25	28	17	65	M16x50	5/8x2"	4187
	OL6265-10	1"1/2	1"1/4 NPT	38	79,38	110	36,50	110	42	25	28	17	65	M16x50	5/8x2"	4187
	OL6265-11	2"	2" NPT	51	96,82	134	44,45	132	45	35	33	21	75	M20x70	3/4x2"1/2	4225
	OL6265-12	2"	1"1/2 NPT	51	96,82	134	44,45	132	45	35	33	21	75	M20x70	3/4x2"1/2	4225

OL6280
OL6285

Flange Filettate JIC

JIC Threaded Flanges

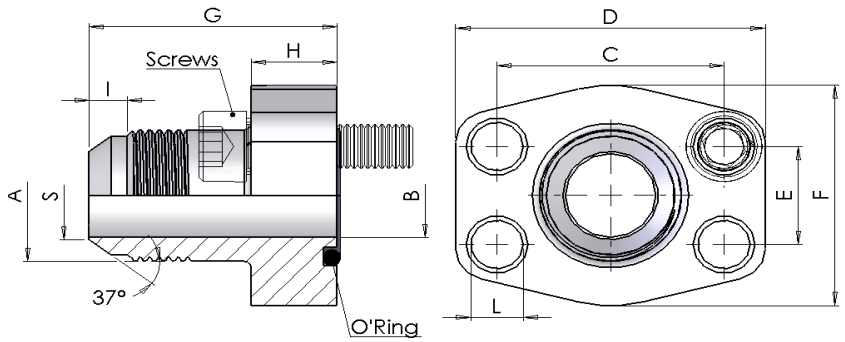


max pressure	part number	SAE	Dimensions											Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	L	S	Metric	Unc	type
		3000 psi														
345	**OL6280-01**	1/2"	3/4" - 16UNF	9,9	38,10	54	17,48	46	52	13	6,4	9,0	10,82	M8x30	5/16x1"1/4	4075
	OL6280-02	1/2"	7/8" - 14UN	12,3	38,10	54	17,48	46	52	13	6,8	9,0	13,69	M8x30	5/16x1"1/4	4075
	OL6280-03	3/4"	1"1/16 - 12UN	15,5	47,63	65	22,23	50	60	14	8,0	11,5	16,87	M10x35	3/8x1"1/2	4100
	OL6280-04	1"	1"5/16 - 12UN	21,5	52,37	70	26,19	55	63	16	8,0	11,5	23,19	M10x35	3/8x1"1/2	4131
276	**OL6280-05**	1"1/4	1"5/8 - 12UN	27,5	58,72	79	30,18	68	65	14	9,3	11,5	29,13	M10x35	7/16x1"3/4	4150
207	**OL6280-06**	1"1/2	1"7/8 - 12UN	33,0	69,85	94	35,71	78	70	16	9,6	13,5	35,08	M12x35	1/2x1"3/4	4187
		6000 psi														
414	**OL6285-01**	1/2"	3/4" - 16UNF	9,9	40,49	56	18,24	48	60	16	6	9,0	10,82	M8x30	5/16x1"1/4	4075
	OL6285-02	1/2"	7/8" - 14UN	12,3	40,49	56	18,24	48	60	16	7	9,0	13,69	M8x30	5/16x1"1/4	4075
	OL6285-03	3/4"	1"1/16 - 12UN	15,5	50,80	71	23,80	60	73	19	8	11,5	16,87	M10x40	3/8x1"1/2	4100
	OL6285-04	1"	1"5/16 - 12UN	21,5	57,15	81	27,76	70	82	24	8	13,0	23,19	M12x45	7/16x1"3/4	4131
	OL6285-05	1"1/4	1"5/8 - 12UN	27,5	66,68	95	31,75	78	92	27	9	15,0	29,13	M14x45	1/2x1"3/4	4150
	OL6285-06	1"1/2	1"7/8 - 12UN	33,0	79,38	113	36,50	95	96	30	10	17,0	35,08	M16x50	5/8x2"	4187

OL6300
OL6305

Flange a 90° Filettate JIC


JIC Threaded 90° Flanges

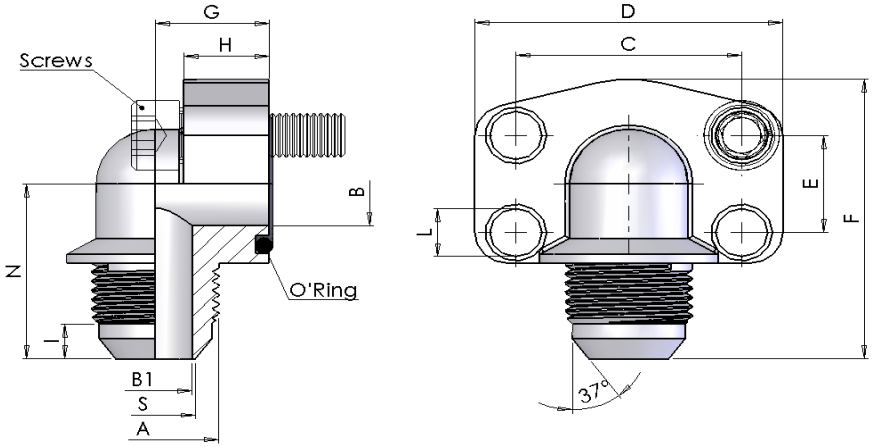

max pressure	part number	SAE	Dimensions													Viti Screws		OR
bar		size	A	B	B1	C	D	E	F	G	H	I	L	N	S	Metric	Unc	type
	3000 psi																	
345	**OL6300-01**	1/2"	3/4" - 16UNF	13	9,9	38,10	54	17,48	60	20	16	6,4	9	37	10,82	M8x30	5/16x1"1/4	4075
	OL6300-02	1/2"	7/8" - 14UN	13	12,3	38,10	54	17,48	60	20	16	6,8	9	37	13,69	M8x30	5/16x1"1/4	4075
	OL6300-03	3/4"	1"1/16 - 12UN	19	15,5	47,63	65	22,23	64	24	18	8	11	39	16,87	M10x35	3/8x1"1/2	4100
	OL6300-04	1"	1"5/16 - 12UN	25	21,5	52,37	70	26,19	71	28	19	8	11	44	23,19	M10x35	3/8x1"1/2	4131
276	**OL6300-05**	1"1/4	1"5/8 - 12UN	32	27,5	58,72	79	30,18	86	34	21	9,3	11,5	52	29,13	M10x40	7/16x1"3/4	4150
207	**OL6300-06**	1"1/2	1"7/8 - 12UN	38	33,0	69,85	93	35,71	96	38	25	9,6	13,5	57	35,08	M12x45	1/2x1"3/4	4187
	6000 psi																	
414	**OL6305-01**	1/2"	3/4" - 16UNF	13	9,9	40,49	54	18,24	60	20	16	6,4	9	37	10,82	M8x30	5/16x1"1/4	4075
	OL6305-02	1/2"	7/8" - 14UN	13	12,3	40,49	54	18,24	60	20	16	6,8	9	37	13,69	M8x30	5/16x1"1/4	4075
	OL6305-03	3/4"	1"1/16 - 12UN	19	15,0	50,80	70	23,80	71	28	19	8	11	44	16,87	M10x35	3/8x1"1/2	4100
	OL6305-04	1"	1"5/16 - 12UN	25	21,5	57,15	79	27,76	85	34	21	8	13	51	23,19	M12x45	7/16x1"3/4	4131
	OL6305-05	1"1/4	1"5/8 - 12UN	32	27,5	66,68	93	31,75	96	38	25	9,3	15	57	29,13	M14x45	1/2x1"3/4	4150
	OL6305-06	1"1/2	1"7/8 - 12UN	38	33,0	79,38	110	35,50	111	42	25	9,6	17	66	35,08	M16x50	5/8x2"	4187

OL6320 OL6325 Flange filettate (UN) con filetto cilindrico con sede O-RING

(UN) Threaded flanges with O-Ring groove parallel thread

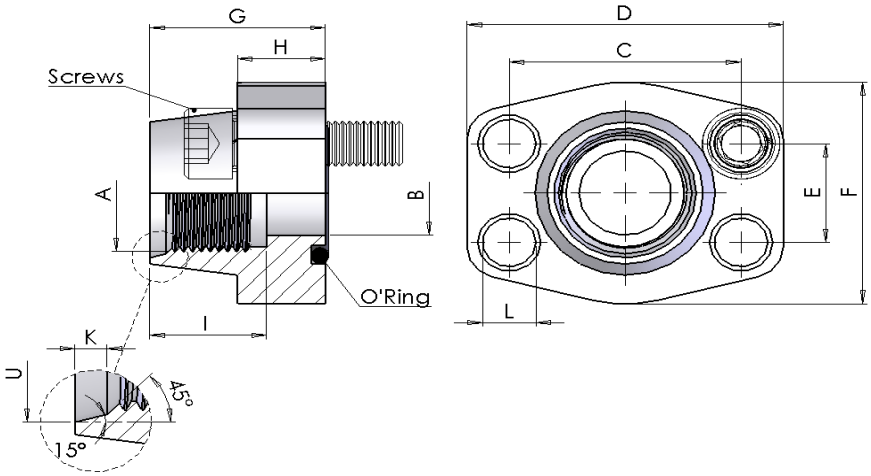


max pressure	part number	SAE	Dimensions												Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	L	U	K	Metric	Unc	type
	3000 psi																
	OL6320-01	1/2"	3/4" - 16UNF	13	38,10	57	17,48	46	36	16	17	9,0	20,6	2,5	M8x30	5/16x1"1/4	4075
345	**OL6320-02**	3/4"	1"1/16 - 12UN	19	47,63	65	22,23	50	36	18	23	11,0	29,2	3,3	M10x35	3/8x1"1/2	4100
	OL6320-03	1"	1"5/16 - 12UN	25	52,37	70	26,19	55	38	18	23	11,0	35,5	3,3	M10x35	3/8x1"1/2	4131
276	**OL6320-04**	1"1/4	1"5/8 - 12UN	32	58,72	79	30,18	68	41	21	23	11,5	43,5	3,3	M10x40	7/16x1"3/4	4150
207	**OL6320-05**	1"1/2	1"7/8 - 12UN	38	69,85	93	35,71	78	45	25	23	13,5	49,8	3,3	M12x45	1/2x1"3/4	4187
	6000 psi																
	OL6325-01	1/2"	3/4" - 16UNF	13	40,49	57	18,24	46	36	16	17	9	20,6	2,5	M8x30	5/16x1"1/4	4075
	OL6325-02	3/4"	1"1/16 - 12UN	19	50,80	71	23,80	55	35	21	23	11	29,2	3,3	M10x40	3/8x1"1/2	4100
414	**OL6325-03**	1"	1"5/16 - 12UN	25	57,15	81	27,76	65	42	25	23	13	35,5	3,3	M12x45	7/16x1"3/4	4131
	OL6325-04	1"1/4	1"5/8 - 12UN	32	66,68	95	31,75	78	45	27	23	15	43,5	3,3	M14x45	1/2x1"3/4	4150
	OL6325-05	1"1/2	1"7/8 - 12UN	38	79,38	112	36,50	94	50	30	23	17	49,8	3,3	M16x50	5/8x2"	4187

OL6340
OL6345

Controflange filettate (UN) con filetto cilindrico con sede O-RING

(UN) Threaded counter-flanges with O-Ring groove parallel thread

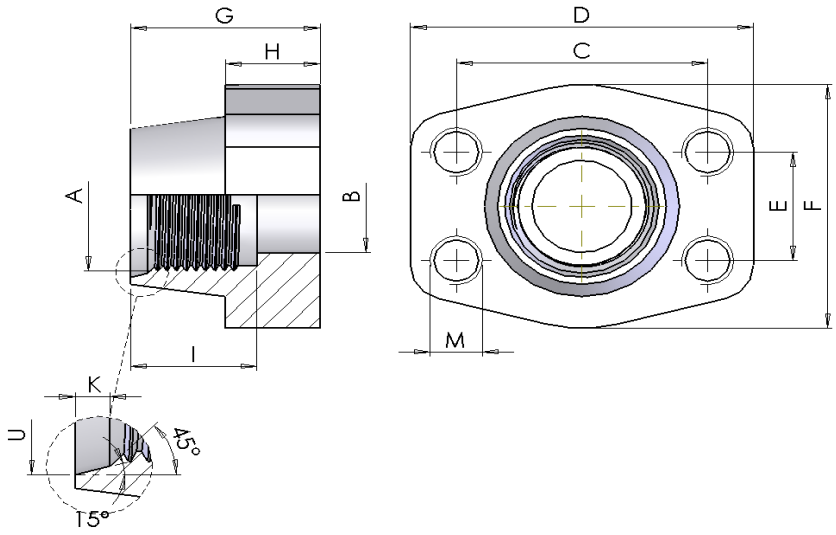


max pressure	part number	SAE	Dimensions											Metric	Unc	
bar		size	A	B	C	D	E	F	G	H	I	U	K	M		
	3000 psi															
	OL6340-01	1/2"	3/4" - 16UNF	13	38,10	57	17,48	46	36	16	17	20,6	2,5	M8	5/16	
345	**OL6340-02**	3/4"	1"1/16 - 12UN	19	47,63	65	22,23	50	36	18	23	29,2	3,3	M10	3/8	
	OL6340-03	1"	1"5/16 - 12UN	25	52,37	70	26,19	55	38	18	23	35,5	3,3	M10	3/8	
276	**OL6340-04**	1"1/4	1"5/8 - 12UN	32	58,72	79	30,18	68	41	21	23	43,5	3,3	M10	7/16	
207	**OL6340-05**	1"1/2	1"7/8 - 12UN	38	69,85	93	35,71	78	45	25	23	49,8	3,3	M12	1/2	
	6000 psi															
	OL6345-01	1/2"	3/4" - 16UNF	13	40,49	57	18,24	46	36	16	17	20,6	2,5	M8	5/16	
	OL6345-02	3/4"	1"1/16 - 12UN	19	50,80	71	23,80	55	35	21	23	29,2	3,3	M10	3/8	
414	**OL6345-03**	1"	1"5/16 - 12UN	25	57,15	81	27,76	65	42	25	23	35,5	3,3	M12	7/16	
	OL6345-04	1"1/4	1"5/8 - 12UN	32	66,68	95	31,75	78	45	27	23	43,5	3,3	M14	1/2	
	OL6345-05	1"1/2	1"7/8 - 12UN	38	79,38	112	36,50	94	50	30	23	49,8	3,3	M16	5/8	

OL6360
OL6365

Flange a 90° filettate (UN) con filetto cilindrico con sede O-RING

(UN) Threaded 90° flanges with O-Ring groove parallel thread

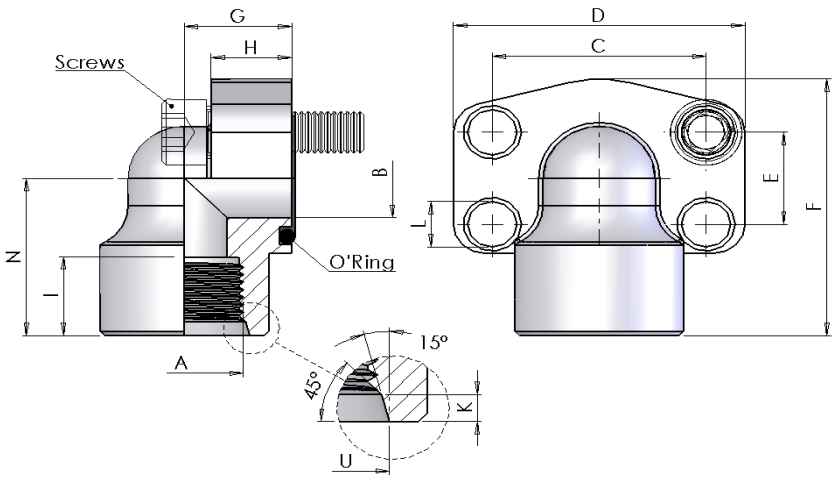


max pressure	part number	SAE	Dimensions													Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	L	N	U	K	Metric	Unc	type
	3000 psi																	
345	**OL6360-01**	1/2"	3/4"-16 UNF	13	38,10	54	17,48	60	20	16	17	9	37,0	29,6	2,5	M8x30	5/16x1"1/4	4075
	OL6360-02	3/4"	1" 1/16-12 UN	19	47,63	65	22,23	63	24	18	23	11	38,0	29,2	3,3	M10x35	3/8x1"1/2	4100
	OL6360-03	1"	1" 5/16-12 UN	25	52,37	70	26,19	70	28	19	23	11	43,0	35,5	3,3	M10x35	3/8x1"1/2	4131
276	**OL6360-04**	1"1/4	1" 5/8-12 UN	32	58,72	79	30,18	79	34	21	23	12	51,0	43,5	3,4	M10x40	7/16x1"3/4	4150
207	**OL6360-05**	1"1/2	1" 7/8-12 UN	38	69,85	93	35,71	93	38	25	23	14	56,0	49,8	3,4	M12x45	1/2x1"3/4	4187
	6000 psi																	
414	**OL6365-01**	1/2"	3/4"-16 UNF	13	40,49	54	18,24	60	20	16	17	9	37,0	29,6	2,5	M8x30	5/16x1"1/4	4075
	OL6365-02	3/4"	1" 1/16-12 UN	19	50,80	70	23,80	70	28	19	23	11	43,0	29,2	3,3	M10x35	3/8x1"1/2	4100
	OL6365-03	1"	1" 5/16-12 UN	25	57,15	79	27,76	85	34	21	23	13	51,0	35,5	3,3	M12x45	7/16x1"3/4	4131
	OL6365-04	1"1/4	1" 5/8-12 UN	32	66,68	93	31,75	95	38	25	23	15	56	43,5	3,4	M14x45	1/2x1"3/4	4150
	OL6365-05	1"1/2	1" 7/8-12 UN	38	79,38	110	36,50	110	42	25	23	17	65,0	49,8	3,4	M16x50	5/8x2"	4187

OL6380
OL6385

Flange a saldare di tasca

Weld in flanges

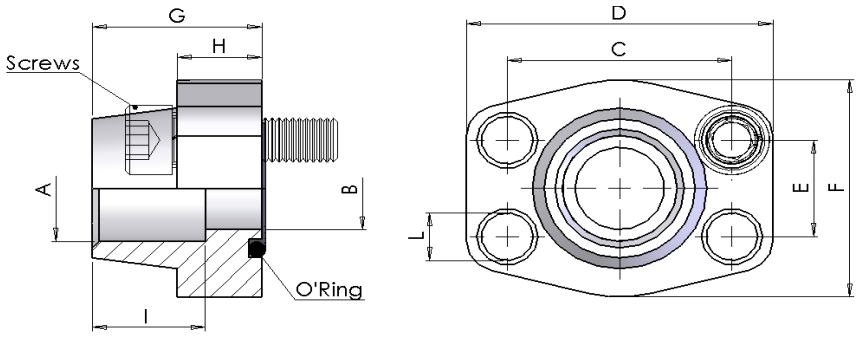


max pressure	part number	SAE	Dimensions										Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	L	Metric	Unc	type
3000 psi															
345	**OL6380-01**	1/2"	21,6	13	38,10	57	17,48	46	36	16	19	9,0	M8x30	5/16x1"1/4	4075
	OL6380-02	1/2"	17,5	13	38,10	57	17,48	46	36	16	19	9,0	M8x30	5/16x1"1/4	4075
	OL6380-03	3/4"	27,2	19	47,63	65	22,23	50	36	18	19	11,0	M10x35	3/8x1"1/2	4100
	OL6380-04	1"	34	25	52,37	70	26,19	55	38	18	19	11,0	M10x35	3/8x1"1/2	4131
276	**OL6380-05**	1"1/4	42,8	32	58,72	79	30,18	68	41	21	22	11,5	M10x40	7/16x1"3/4	4150
207	**OL6380-06**	1"1/2	48,6	38	69,85	93	35,71	78	45	25	24	13,5	M12x45	1/2x1"3/4	4187
	OL6380-07	2"	61	51	77,77	102	42,88	90	45	25	26	13,5	M12x45	1/2x1"3/4	4225
172	**OL6380-08**	2"1/2	76,6	63	88,90	114	50,80	105	50	25	30	13,5	M12x45	1/2x1"3/4	4275
138	**OL6380-09**	3"	90,5	73	106,38	134	61,93	124	50	27	34	17,5	M16x50	5/8x2"	4337
34	**OL6380-10**	3"1/2	103	89	120,65	152	69,85	136	48	27	34	17,5	M16x50	5/8x2"	4387
	OL6380-11	4"	115,5	99	130,18	162	77,77	146	48	27	34	17,5	M16x50	5/8x2"	4437
6000 psi															
414	**OL6385-01**	1/2"	21,6	13	40,49	57	18,24	46	36	16	19	9	M8x30	5/16x1"1/4	4075
	OL6385-02	1/2"	17,5	13	40,49	57	18,24	46	36	16	19	9	M8x30	5/16x1"1/4	4075
	OL6385-03	3/4"	27,2	19	50,80	71	23,80	55	35	21	22	11	M10x40	3/8x1"1/2	4100
	OL6385-04	1"	34	25	57,15	81	27,76	65	42	25	22	13	M12x45	7/16x1"3/4	4131
	OL6385-05	1"1/4	42,8	32	66,68	95	31,75	78	45	27	25	15	M14x45	1/2x1"3/4	4150
	OL6385-06	1"1/2	48,6	38	79,38	112	36,50	94	50	30	28	17	M16x50	5/8x2"	4187
	OL6385-07	2"	61	51	96,82	134	44,45	114	65	37	24	21	M20x70	3/4x2"1/2	4225
	OL6385-08	2"1/2	76,6	63	123,80	180	58,70	152	80	45	32	26	M24x80	-	4275
	OL6385-09	3"	90,5	73	152,40	208	71,40	178	90	55	30	33	M30x100	-	4337

OL6400
OL6405

Controflange a saldare di tasca


Weld in counter-flanges

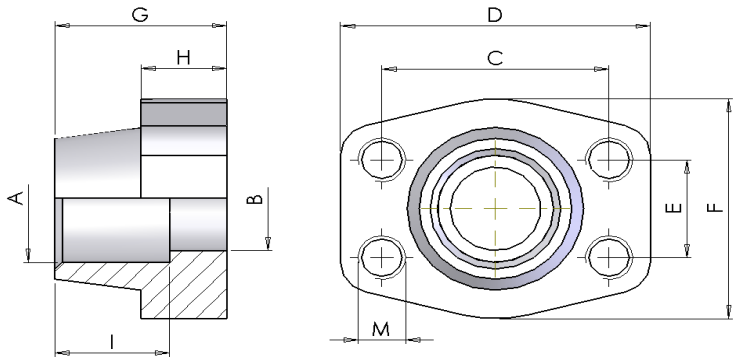

max pressure	part number	SAE	Dimensions									Metric	Unc	
bar		size	A	B	C	D	E	F	G	H	I	M		
3000 psi														
345	**OL6400-01**	1/2"	21,6	13	38,10	57	17,48	46	36	16	19	M8	5/16	
	OL6400-02	1/2"	17,5	13	38,10	57	17,48	46	36	16	19	M8	5/16	
	OL6400-03	3/4"	27,2	19	47,63	65	22,23	50	36	18	19	M10	3/8	
	OL6400-04	1"	34	25	52,37	70	26,19	55	38	18	19	M10	3/8	
276	**OL6400-05**	1"1/4	42,8	32	58,72	79	30,18	68	41	21	22	M10	7/16	
207	**OL6400-06**	1"1/2	48,6	38	69,85	93	35,71	78	45	25	24	M12	1/2	
	OL6400-07	2"	61	51	77,77	102	42,88	90	45	25	26	M12	1/2	
172	**OL6400-08**	2"1/2	76,6	63	88,90	114	50,80	105	50	25	30	M12	1/2	
138	**OL6400-09**	3"	90,5	73	106,38	134	61,93	124	50	27	34	M16	5/8	
34	**OL6400-10**	3"1/2	103	89	120,65	152	69,85	136	48	27	34	M16	5/8	
	OL6400-11	4"	115,5	99	130,18	162	77,77	146	48	27	34	M16	5/8	
6000 psi														
414	**OL6405-01**	1/2"	21,6	13	40,49	57	18,24	46	36	16	19	M8	5/16	
	OL6405-02	1/2"	17,5	13	40,49	57	18,24	46	36	16	19	M8	5/16	
	OL6405-03	3/4"	27,2	19	50,80	71	23,80	55	35	21	22	M10	3/8	
	OL6405-04	1"	34	25	57,15	81	27,76	65	42	25	22	M12	7/16	
	OL6405-05	1"1/4	42,8	32	66,68	95	31,75	78	45	27	25	M14	1/2	
	OL6405-06	1"1/2	48,6	38	79,38	112	36,50	94	50	30	28	M16	5/8	
	OL6405-07	2"	61	51	96,82	134	44,45	114	65	37	24	M20	3/4	
	OL6405-08	2"1/2	76,6	63	123,80	180	58,70	152	80	45	32	M24	-	
	OL6405-09	3"	90,5	73	152,40	208	71,40	178	90	55	30	M30	-	

OL6420
OL6425
Flange a saldare di tasca tubo metrico


Metric pipe weld in flanges

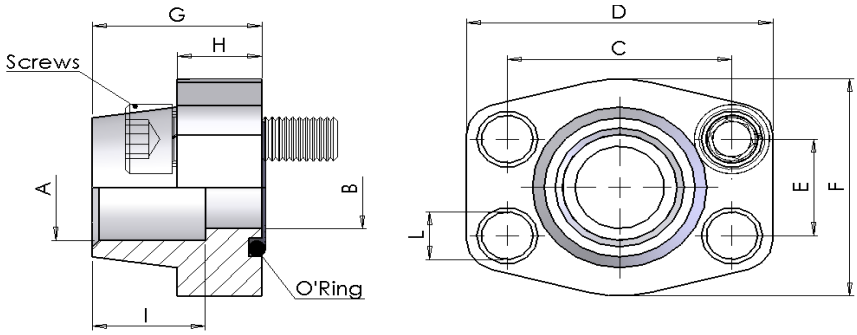

max pressure	part number	SAE	Dimensions										Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	L	Metric	Unc	type
	3000 psi														
	OL6420-01	1/2"	20,3	13	38,10	57	17,48	46	36	16	19	9,0	M8x30	5/16x1"1/4	4075
345	**OL6420-02**	3/4"	25,3	19	47,63	65	22,23	50	36	18	19	11,0	M10x35	3/8x1"1/2	4100
	OL6420-03	1"	30,3	25	52,37	70	26,19	55	38	18	19	11,0	M10x35	3/8x1"1/2	4131
276	**OL6420-04**	1"1/4	38,3	32	58,72	79	30,18	68	41	21	22	11,5	M10x40	7/16x1"3/4	4150
207	**OL6420-05**	1"1/2	50,5	38	69,85	93	35,71	78	45	25	24	13,5	M12x45	1/2x1"3/4	4187
	6000 psi														
	OL6425-01	1/2"	20,3	13	40,49	57	18,24	46	36	16	19	9	M8x30	5/16x1"1/4	4075
	OL6425-02	3/4"	25,3	19	50,80	71	23,80	55	35	21	22	11	M10x40	3/8x1"1/2	4100
	OL6425-03	1"	30,3	25	57,15	81	27,76	65	42	25	22	13	M12x45	7/16x1"3/4	4131
414	**OL6425-04**	1"1/4	38,3	32	66,68	95	31,75	78	45	27	25	15	M14x45	1/2x1"3/4	4150
	OL6425-05	1"1/4	38,3	26	66,68	95	31,75	78	45	27	25	15	M14x45	-	4150
	OL6425-06	1"1/4	38,3	28	66,68	95	31,75	78	45	27	25	15	M14x45	-	4150
	OL6425-07	1"1/2	50,5	38	79,38	112	36,50	94	50	30	28	17	M16x50	5/8x2"	4187

OL6440 OL6445 Controflange a saldare di tasca tubo metrico

Metric pipe weld in counter-flanges

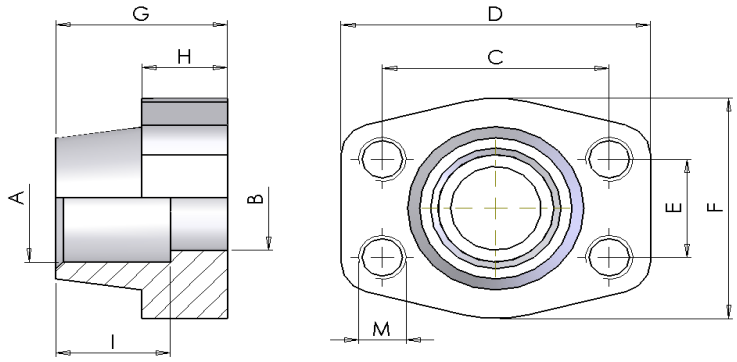


max pressure	part number	SAE	Dimensions									Metric	Unc	
bar		size	A	B	C	D	E	F	G	H	I	M		
3000 psi														
	OL6440-01	1/2"	20,3	13	38,10	57	17,48	46	36	16	19	M8	5/16	
345	**OL6440-02**	3/4"	25,3	19	47,63	65	22,23	50	36	18	19	M10	3/8	
	OL6440-03	1"	30,3	25	52,37	70	26,19	55	38	18	19	M10	3/8	
276	**OL6440-04**	1"1/4	38,3	32	58,72	79	30,18	68	41	21	22	M10	7/16	
207	**OL6440-05**	1"1/2	50,5	38	69,85	93	35,71	78	45	25	24	M12	1/2	
6000 psi														
	OL6445-01	1/2"	20,3	13	40,49	57	18,24	46	36	16	19	M8	5/16	
	OL6445-02	3/4"	25,3	19	50,80	71	23,80	55	35	21	22	M10	3/8	
	OL6445-03	1"	30,3	25	57,15	81	27,76	65	42	25	22	M12	7/16	
414	**OL6445-04**	1"1/4	38,3	32	66,68	95	31,75	78	45	27	25	M14	1/2	
	OL6445-05	1"1/4	38	26	66,68	95	31,75	78	45	27	25	M14	1/2	
	OL6445-06	1"1/4	38	28	66,68	95	31,75	78	45	27	25	M14	1/2	
	OL6445-07	1"1/2	50,5	38	79,38	112	36,50	94	50	30	28	M16	5/8	

OL6460
OL6465

Flange 90° a saldare di tasca


Weld In 90° Flanges

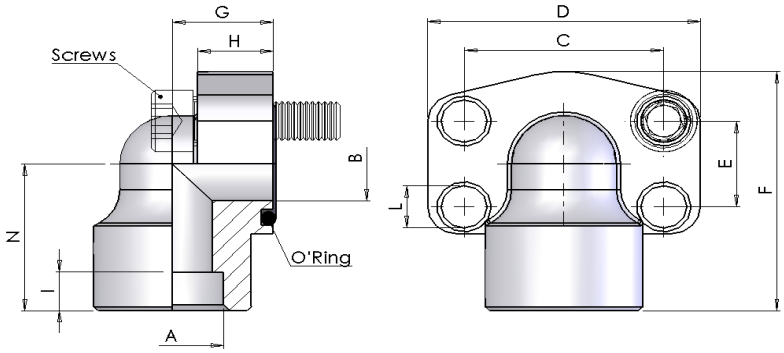

max pressure	part number	SAE	Dimensions											Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	L	N	Metric	Unc	type
3000 psi																
345	**OL6460-01**	1/2"	21,6	13,0	38,10	54	17,48	60	20	16	10	9,0	37	M8x30	5/16x1"1/4	4075
	OL6460-02	1/2"	17,5	13,0	38,10	54	17,48	60	20	16	10	9,0	37	M8x30	5/16x1"1/4	4075
	OL6460-03	3/4"	27,2	19,0	47,63	65	22,23	63	24	18	10	11,0	38	M10x35	3/8x1"1/2	4100
	OL6460-04	1"	34,0	25,0	52,37	70	26,19	70	28	19	12	11,0	43	M10x35	3/8x1"1/2	4131
276	**OL6460-05**	1"1/4	42,8	32,0	58,72	79	30,18	85	34	21	14	11,5	51	M10x40	7/16x1"3/4	4150
207	**OL6460-06**	1"1/2	48,6	38,0	69,85	93	35,71	95	38	25	16	13,5	56	M12x45	1/2x1"3/4	4187
	OL6460-07	2"	61,0	51,0	77,77	110	42,88	110	42	25	18	13,5	65	M12x45	1/2x1"3/4	4225
6000 psi																
414	**OL6465-01**	1/2"	21,6	13,0	40,49	54	18,24	60	20	16	10	9	37	M8x30	5/16x1"1/4	4075
	OL6465-02	1/2"	17,5	13,0	40,49	54	18,24	60	20	16	10	9	37	M8x30	5/16x1"1/4	4075
	OL6465-03	3/4"	27,2	19,0	50,80	70	23,80	70	28	19	12	11	43	M10x40	3/8x1"1/2	4100
	OL6465-04	1"	34,0	25,0	57,15	79	27,76	85	34	21	14	13	51	M12x45	7/16x1"3/4	4131
	OL6465-05	1"1/4	42,8	32,0	66,68	93	31,75	95	38	25	16	15	56	M14x45	1/2x1"3/4	4150
	OL6465-06	1"1/2	48,6	38,0	79,38	110	36,50	110	42	25	18	17	65	M16x50	5/8x2"	4187
	OL6465-07	2"	61,0	51,0	96,82	134	44,45	132	45	35	25	21	75	M20x70	3/4x2"1/2	4225

OL6480 OL6485 Flange 90° a saldare di tasca tubo metrico

Metric pipe weld in 90° flanges

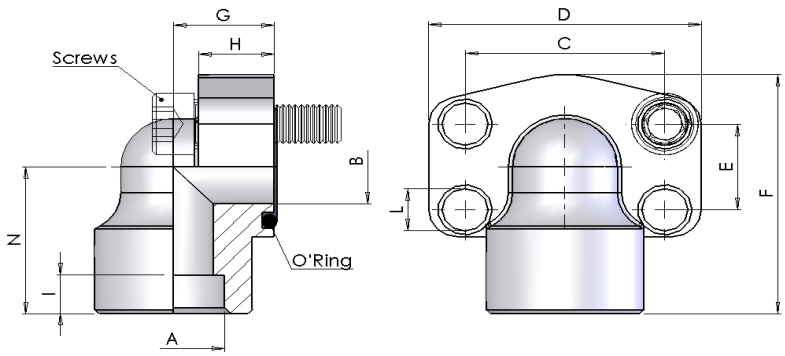


max pressure	part number	SAE	Dimensions											Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	L	N	Metric	Unc	type
	3000 psi															
	OL6480-01	1/2"	20,3	13,0	38,10	54	17,48	60	20	16	10,0	9,0	37	M8x30	5/16x1"1/4	4075
345	**OL6480-02**	3/4"	25,3	19,0	47,63	65	22,23	63	24	18	10,0	11,0	38	M10x35	3/8x1"1/2	4100
	OL6480-03	1"	30,3	25,0	52,37	70	26,19	70	28	19	12,0	11,0	43	M10x35	3/8x1"1/2	4131
276	**OL6480-04**	1"1/4	38,3	32,0	58,72	79	30,18	85	34	21	14,0	11,5	51	M10x40	7/16x1"3/4	4150
207	**OL6480-05**	1"1/2	50,5	38,0	69,85	93	35,71	95	38	25	16,0	13,5	56	M12x45	1/2x1"3/4	4187
	6000 psi															
	OL6485-01	1/2"	20,3	13,0	40,49	54	18,24	60	20	16	10	9	37	M8x30	5/16x1"1/4	4075
	OL6485-02	3/4"	25,3	19,0	50,80	70	23,80	70	28	19	12	11	43	M10x40	3/8x1"1/2	4100
414	**OL6485-03**	1"	30,3	25,0	57,15	79	27,76	85	34	21	14	13	51	M12x45	7/16x1"3/4	4131
	OL6485-04	1"1/4	38,3	32,0	66,68	93	31,75	95	38	25	16	15	56	M14x45	1/2x1"3/4	4150
	OL6485-05	1"1/2	50,5	38,0	79,38	110	36,50	110	42	25	18	17	65	M16x50	5/8x2"	4187

OL6500
OL6505

Controflange 90° a saldare di tasca

Weld in 90° counter-flanges

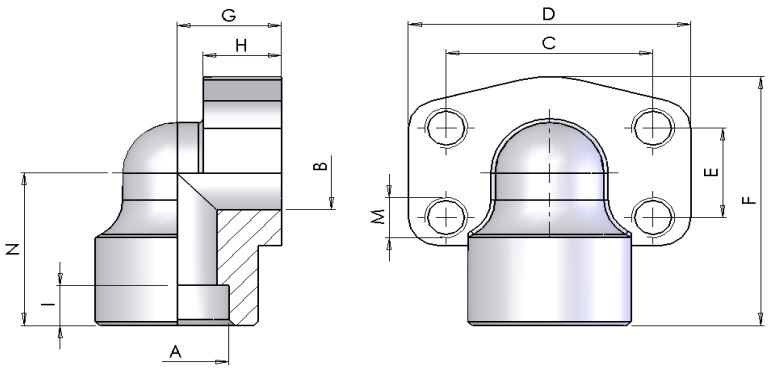


max pressure	part number	SAE	Dimensions										Metric	
bar		size	A	B	C	D	E	F	G	H	I	N	M	
		3000 psi												
345	**OL6500-01**	1/2"	21,6	13	38,10	54	17,48	17	20	16	10	37	M8	
	OL6500-02	1/2"	17,5	13	38,10	54	17,48	17	20	16	10	37	M8	
	OL6500-03	3/4"	27,2	19	47,63	65	22,23	22	24	18	10	38	M10	
	OL6500-04	1"	34,0	25	52,37	70	26,19	26	28	19	12	43	M10	
276	**OL6500-05**	1"1/4	42,8	32	58,72	79	30,18	30	34	21	14	51	M10	
207	**OL6500-06**	1"1/2	48,6	38	69,85	93	35,71	36	38	25	16	56	M12	
	OL6500-07	2"	61,0	51	77,77	110	42,88	43	42	25	18	65	M12	
		6000 psi												
414	**OL6505-01**	1/2"	21,6	13	40,49	54	18,24	18	20	16	10	37	M8	
	OL6505-02	1/2"	17,5	13	40,49	54	18,24	18	20	16	10	37	M8	
	OL6505-03	3/4"	27,2	19	50,80	70	23,80	24	28	19	12	43	M10	
	OL6505-04	1"	34,0	25	57,15	79	27,76	28	34	21	14	51	M12	
	OL6505-05	1"1/4	42,8	32	66,68	93	31,75	32	38	25	16	56	M14	
	OL6505-06	1"1/2	48,6	38	79,38	110	36,50	37	42	25	18	65	M16	
	OL6505-07	2"	61,0	51	96,82	134	44,45	44	45	35	25	75	M20	

OL6520
OL6525

Flange 90° a saldare di tasca


Weld In 90° Flanges

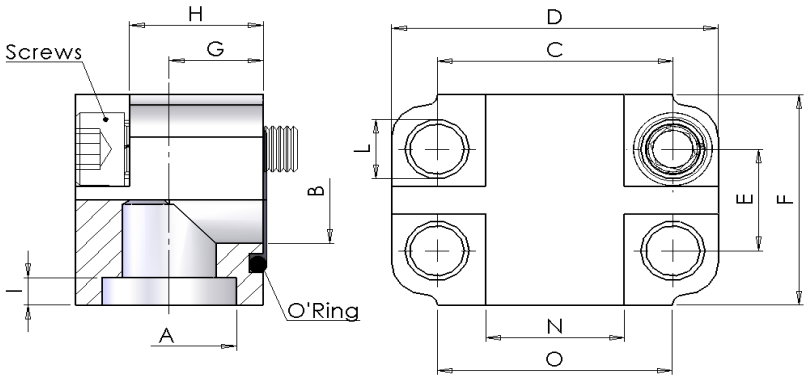

max pressure	part number	SAE	Dimensions												Viti Screws	OR
bar		size	A	B	C	D	E	F	G	H	I	L	N	O	Metric	type
3000 psi																
345	**OL6520-01**	3/4"	27,2	19	47,63	66	22,23	46	19	27	5	11	28	48	M10x45	4100
	OL6520-02	1"	34,0	25	52,37	71	26,19	55	22	34	6	11	32	50	M10x50	4131
276	**OL6520-03**	1"1/4	42,8	32	58,72	81	30,18	65	27	42	7	12	35	60	M10x60	4150
207	**OL6520-04**	1"1/2	48,6	38	69,85	95	35,71	75	32	50	8	14	42	70	M12x70	4187
	OL6520-05	2"	61,0	51	77,77	112	42,88	90	40	63	10	14	50	80	M12x80	4225
172	**OL6520-06**	2"1/2	76,6	63	88,90	120	50,80	120	53	99	15	14	-	-	-	4275
6000 psi																
414	**OL6525-01**	3/4"	27,2	19	50,80	71	23,80	55	22	34	6	11	32	50	M10x50	4100
	OL6525-02	1"	34,0	25	57,15	81	27,76	65	27	42	7	13	35	60	M12x60	4131
	OL6525-03	1"1/4	42,8	32	66,68	95	31,75	75	32	50	8	15	42	70	M14x70	4150
	OL6525-04	1"1/2	48,6	38	79,38	112	36,50	90	40	63	10	17	50	80	M16x90	4187

OL6540 Flange piatte a saldare di tasca


Weld In Flat Flanges

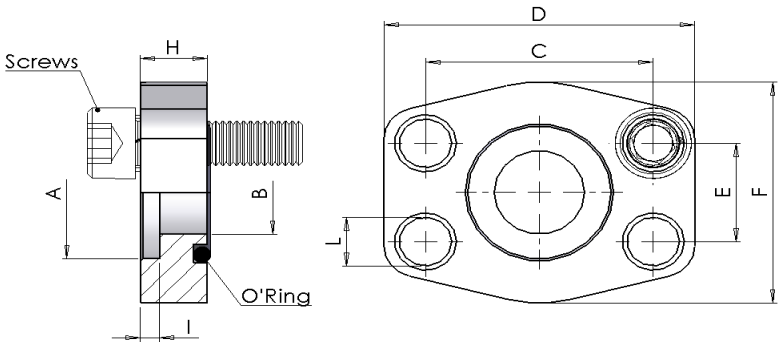

max pressure	part number	SAE	Dimensions									Viti Screws	OR
bar		size	A	B	C	D	E	F	H	I	L	Metric	type
	3000 psi												
40	OL6540-01	1/2"	22,5	15	38,10	56	17,48	46	14	3	9,0	M8x25	4075
	OL6540-02	3/4"	28,5	20	47,63	65	22,23	50	12	4	11,0	M10x30	4100
	OL6540-03	1"	35,5	29	52,37	70	26,19	55	12	4	11,0	M10x30	4131
	OL6540-04	1"1/4	42,5	34	58,72	79	30,18	68	12	4	11,5	M10x30	4150
	OL6540-05	1"1/2	49,0	42	69,85	93	35,71	78	15	4	13,5	M12x35	4187
	OL6540-06	2"	61,0	53	77,77	102	42,88	90	15	4	13,5	M12x35	4225
	OL6540-07	2"1/2	77,0	64	88,90	114	50,80	105	15	4	13,5	M12x35	4275
	OL6540-08	3"	90,0	80	106,38	134	61,93	124	20	5	17,5	M16x50	4337
	OL6540-09	3"1/2	103,0	93	120,65	152	69,85	136	20	5	17,5	M16x50	4387
	OL6540-10	4"	116,0	105	130,18	162	77,77	146	25	6	17,5	M16x50	4437

OL6560 Controflange piatte a saldare di tasca


Weld In Flat Counter Flanges

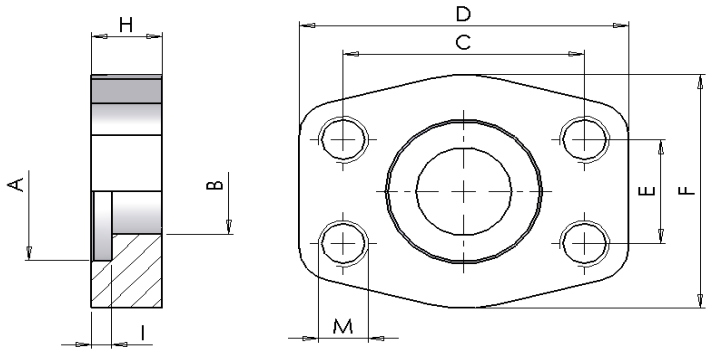

max pressure	part number	SAE	Dimensions								Metric	Unc	
bar		size	A	B	C	D	E	F	H	I	M		
	3000 psi												
40	**OL6560-01**	1/2"	22,5	15	38,10	56	17,48	46	14	3	M8	5/16	
	OL6560-02	3/4"	28,5	20	47,63	65	22,23	50	12	4	M10	3/8	
	OL6560-03	1"	35,5	29	52,37	70	26,19	55	12	4	M10	3/8	
	OL6560-04	1"1/4	42,5	34	58,72	79	30,18	68	12	4	M10	7/16	
	OL6560-05	1"1/2	49,0	42	69,85	93	35,71	78	15	4	M12	1/2	
	OL6560-06	2"	61	53	77,77	102	42,88	90	15	4	M12	1/2	
	OL6560-07	2"1/2	77	64	88,90	114	50,80	105	15	4	M12	1/2	
	OL6560-08	3"	90	80	106,38	134	61,93	124	20	5	M16	5/8	
	OL6560-09	3"1/2	103	93	120,65	152	69,85	136	20	5	M16	5/8	
	OL6560-10	4"	116	105	130,18	162	77,77	146	25	6	M16	5/8	

OL6580 Flange piatte con tasca


Pocket Flat Flanges

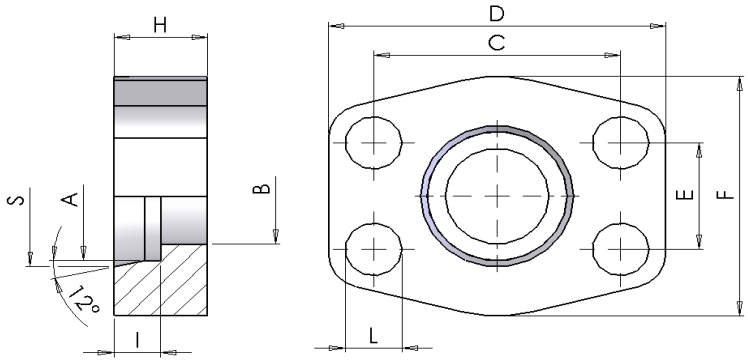

max pressure	part number	SAE	Dimensions										
bar		size	A	B	C	D	E	F	H	I	L	S	
	6000 psi												
414	**OL6580-01**	1/2"	17,0	14	40,49	56	18,24	48	14	9	9,0	19,5	
	OL6580-02	1/2"	22,0	16	40,49	56	18,24	48	14	9	9,0	24	
	OL6580-03	3/4"	27,0	20	50,80	71	23,80	60	18	9	11,0	29,5	
	OL6580-04	1"	34,0	26	57,15	81	27,76	70	22	13	14,0	36	
	OL6580-05	1"1/4	43,0	32	66,68	95	31,75	78	25	16	16,0	46	

OL6600 Flange piatte con foro passante


Flat Flanges With Through Hole

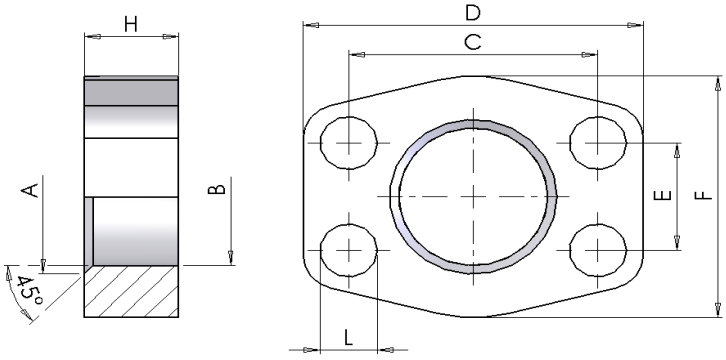

max pressure	part number	SAE	Dimensions							
bar		size	A	B	C	D	E	F	H	L
	6000 psi									
414	**OL6600-01**	1/2"	22	21	40,49	56	18,24	48	14	9
	OL6600-02	1/2"	27	24	40,49	56	18,24	48	14	9
	OL6600-03	3/4"	32	29	50,80	71	23,80	60	18	11
	OL6600-04	1"	43	38	57,15	81	27,76	70	22	14
	OL6600-05	1"1/4	49	44	66,68	95	31,75	78	25	16

OL6620 Flange ovali con foro passante


Oval Flanges With Through Hole

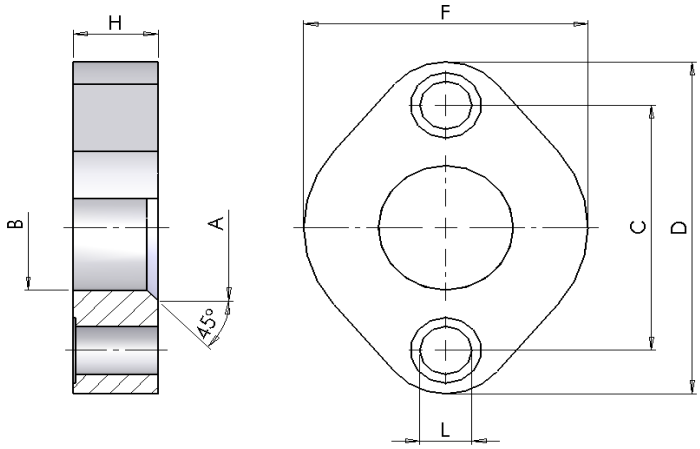

max pressure	part number	SAE	Dimensions							
bar		size	A	B	C	D	F	H	L	
	6000 psi									
414	**OL6620-01**	1/2"	22	20,5	44,40	60	48	14	8,5	
	OL6620-02	1/2"	27	24,0	44,40	60	48	14	8,5	
	OL6620-03	3/4"	32	28,5	56,10	76	60	18	10,5	
	OL6620-04	1"	43	37,5	63,60	88	70	22	12,5	
	OL6620-05	1"1/4	49	44,0	73,90	103	78	25	14,5	

OL6640 OL6645 Flange SAE per controllo di Pressione


Check Pressure Sae Flanges

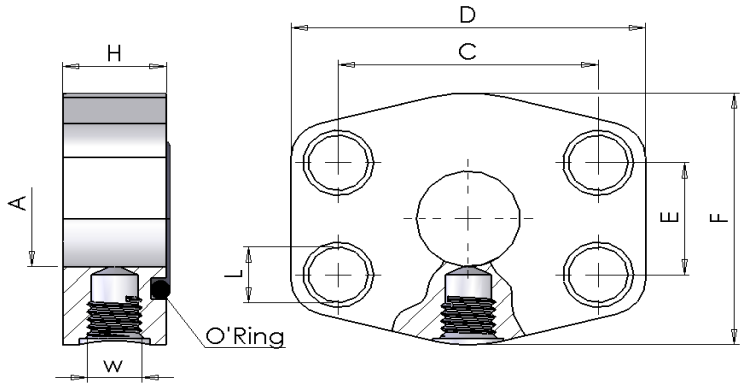

max pressure	part number	SAE	Dimensions								OR
bar		size	A	C	D	E	F	H	L	W	type
	3000 psi										
345	**OL6640-01**	1"	25,0	52,37	71	26,19	60	19	11	M10 - G1/8	4131
276	**OL6640-02**	1"1/4	32	58,72	81	30,18	68	20	12	M10 - M12 - G1/8 - G1/4	4150
207	**OL6640-03**	1"1/2	38	69,85	95	35,71	78	25	14	M10 - M12 - G1/8 - G1/4	4187
	OL6640-04	2"	51	77,77	102	42,88	90	19	14	M10 - G1/8	4225
172	**OL6640-05**	2"1/2	63	88,90	114	50,80	105	19	14	M10 - G1/8	4275
138	**OL6640-06**	3"	73	106,38	134	61,93	124	23	18	M10 - M12 - G1/8 - G1/4	4337
	6000 psi										
414	**OL6645-01**	3/4"	19	50,80	71	23,80	60	19	11	M10 - G1/8	4100
	OL6645-02	1"	25	57,15	81	27,76	70	22	13	M10 - M12 - G1/8 - G1/4	4131
	OL6645-03	1"1/4	32	66,68	95	31,75	78	25	15	M10 - M12 - G1/8 - G1/4	4150
	OL6645-04	1"1/2	38	79,38	112	36,50	94	28	17	M10 - M12 - G1/8 - G1/4	4187
	OL6645-05	2"	51	96,82	134	44,45	114	28	21	M10 - M12 - G1/8 - G1/4	4225

OL6660 OL6665 Flange a saldare di testa


Weld On Flanges

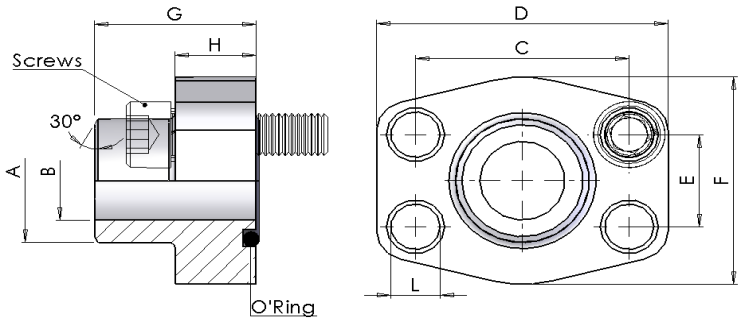

max pressure	part number	SAE	Dimensions									Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	L	Metric	Unc	type
	3000 psi													
345	**OL6660-01**	1/2"	21,5	13	38,10	57	17,48	46	36	16	9,0	M8x30	5/16x1"1/4	4075
	OL6660-02	1/2"	17,5	13	38,10	57	17,48	46	36	16	9,0	M8x30	5/16x1"1/4	4075
	OL6660-03	3/4"	28,0	19	47,63	65	22,23	50	36	18	11,0	M10x35	3/8x1"1/2	4100
	OL6660-04	1"	34,0	25	52,37	70	26,19	55	38	18	11,0	M10x35	3/8x1"1/2	4131
276	**OL6660-05**	1"1/4	42,8	32	58,72	79	30,18	68	41	21	11,5	M10x40	7/16x1"3/4	4150
207	**OL6660-06**	1"1/2	48,6	38	69,85	93	35,71	78	44	25	13,5	M12x45	1/2x1"3/4	4187
	OL6660-07	2"	61,0	51	77,77	102	42,88	90	45	25	13,5	M12x45	1/2x1"3/4	4225
172	**OL6660-08**	2"1/2	77,0	63	88,90	114	50,80	105	50	25	13,5	M12x45	1/2x1"3/4	4275
138	**OL6660-09**	3"	92,0	73	106,38	134	61,93	124	50	27	17,5	M16x50	5/8x2"	4337
34	**OL6660-10**	3"1/2	103,0	89	120,65	152	69,85	136	48	27	17,5	M16x50	5/8x2"	4387
	OL6660-11	4"	115,5	99	130,18	162	77,77	146	48	27	17,5	M16x50	5/8x2"	4437
	6000 psi													
414	**OL6665-01**	1/2"	21,5	13	40,49	57	18,24	46	36	16	9	M8x30	5/16x1"1/4	4075
	OL6665-02	1/2"	17,5	13	40,49	57	18,24	46	36	16	9	M8x30	5/16x1"1/4	4075
	OL6665-03	3/4"	28,0	19	50,80	71	23,80	55	35	21	11	M10x40	3/8x1"1/2	4100
	OL6665-04	1"	34,0	25	57,15	79	27,76	68	41	21	13	M12x45	7/16x1"3/4	4131
375	**OL6665-05**	1"1/4	42,8	32	66,68	93	31,75	78	44	25	15	M14x45	1/2x1"3/4	4150
320	**OL6665-06**	1"1/2	48,6	38	79,38	112	36,50	94	55	30	17	M16x50	5/8x2"	4187
250	**OL6665-07**	2"	61,0	51	96,82	134	44,45	114	65	37	21	M20x70	3/4x2"1/2	4225
230	**OL6665-08**	2"1/2	76,6	63	123,80	180	58,70	152	80	45	26	M24x80	--	4275
200	**OL6665-09**	3"	90,0	73	152,40	208	71,40	178	90	55	33	M30x100	--	4337

OL6680 OL6685 Controflange a saldare di testa


Weld On Counter-Flanges

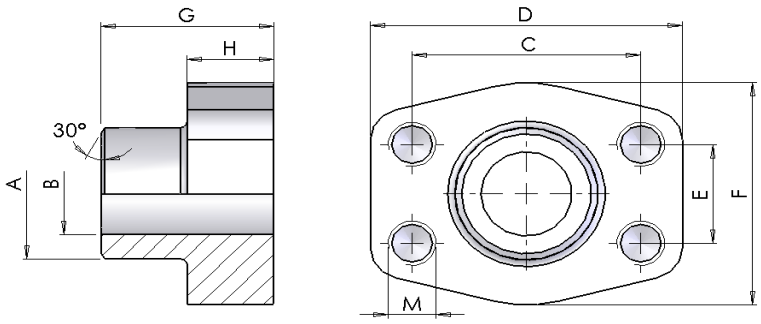

max pressure	part number	SAE	Dimensions								Metric	Unc	
bar		size	A	B	C	D	E	F	G	H	M		
3000 psi													
345	**OL6680-01**	1/2"	21,5	13	38,10	57	17,48	46	36	16	M8	5/16	
	OL6680-02	1/2"	17,5	13	38,10	57	17,48	46	36	16	M8	5/16	
	OL6680-03	3/4"	28,0	19	47,63	65	22,23	50	36	18	M10	3/8	
	OL6680-04	1"	34,0	25	52,37	70	26,19	55	38	18	M10	3/8	
276	**OL6680-05**	1"1/4	42,8	32	58,72	79	30,18	68	41	21	M10	7/16	
207	**OL6680-06**	1"1/2	48,6	38	69,85	93	35,71	78	44	25	M12	1/2	
	OL6680-07	2"	61,0	51	77,77	102	42,88	90	45	25	M12	1/2	
172	**OL6680-08**	2"1/2	77,0	63	88,90	114	50,80	105	50	25	M12	1/2	
138	**OL6680-09**	3"	92,0	73	106,38	134	61,93	124	50	27	M16	5/8	
34	**OL6680-10**	3"1/2	103,0	89	120,65	152	69,85	136	48	27	M16	5/8	
	OL6680-11	4"	115,5	99	130,18	162	77,77	146	48	27	M16	5/8	
6000 psi													
414	**OL6685-01**	1/2"	21,5	13	40,49	57	18,24	46	36	16	M8	5/16	
	OL6685-02	1/2"	17,5	13	40,49	57	18,24	46	36	16	M8	5/16	
	OL6685-03	3/4"	28,0	19	50,80	71	23,80	55	35	21	M10	3/8	
	OL6685-04	1"	34,0	25	57,15	79	27,76	68	41	21	M12	7/16	
375	**OL6685-05**	1"1/4	42,8	32	66,68	93	31,75	78	44	25	M14	1/2	
320	**OL6685-06**	1"1/2	48,6	38	79,38	112	36,50	94	55	30	M16	5/8	
250	**OL6685-07**	2"	61,0	51	96,82	134	44,45	114	65	37	M20	3/4	
230	**OL6685-08**	2"1/2	76,6	63	123,80	180	58,70	152	80	45	M24	----	
200	**OL6685-09**	3"	90,0	73	152,40	208	71,40	178	90	55	M30	----	

OL6700 OL6705 Doppie Flange a saldare di testa


Weld On Double Flanges

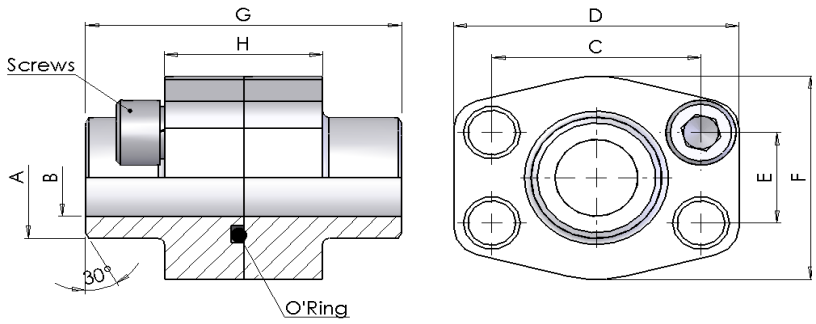

max pressure	part number	SAE	Dimensions								Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	Metric	Unc	type
3000 psi													
345	**OL6700-01**	1/2"	21,5	13	38,10	57	17,48	46	72	32	M8x30	5/16x1"1/4	4075
	OL6700-02	1/2"	17,5	13	38,10	57	17,48	46	72	32	M8x30	5/16x1"1/4	4075
	OL6700-03	3/4"	28,0	19	47,63	65	22,23	50	72	36	M10x35	3/8x1"1/2	4100
	OL6700-04	1"	34,0	25	52,37	70	26,19	55	76	36	M10x35	3/8x1"1/2	4131
276	**OL6700-05**	1"1/4	42,8	32	58,72	79	30,18	68	82	42	M10x40	7/16x1"3/4	4150
207	**OL6700-06**	1"1/2	48,6	38	69,85	93	35,71	78	88	50	M12x45	1/2x1"3/4	4187
	OL6700-07	2"	61,0	51	77,77	102	42,88	90	90	50	M12x45	1/2x1"3/4	4225
172	**OL6700-08**	2"1/2	77,0	63	88,90	114	50,80	105	100	50	M12x45	1/2x1"3/4	4275
138	**OL6700-09**	3"	92,0	73	106,38	134	61,93	124	100	54	M16x50	5/8x2"	4337
34	**OL6700-10**	3"1/2	103,0	89	120,65	152	69,85	136	96	54	M16x50	5/8x2"	4387
	OL6700-11	4"	115,5	99	130,18	162	77,77	146	96	54	M16x50	5/8x2"	4437
6000 psi													
414	**OL6705-01**	1/2"	21,5	13	40,49	57	18,24	46	72	32	M8x30	5/16x1"1/4	4075
	OL6705-02	1/2"	17,5	13	40,49	57	18,24	46	72	32	M8x30	5/16x1"1/4	4075
	OL6705-03	3/4"	28,0	19	50,80	71	23,80	55	70	42	M10x40	3/8x1"1/2	4100
	OL6705-04	1"	34,0	25	57,15	79	27,76	68	82	42	M12x45	7/16x1"3/4	4131
375	**OL6705-05**	1"1/4	42,8	32	66,68	93	31,75	78	88	50	M14x45	1/2x1"3/4	4150
320	**OL6705-06**	1"1/2	48,6	38	79,38	112	36,50	94	110	60	M16x50	5/8x2"	4187
250	**OL6705-07**	2"	61,0	51	96,82	134	44,45	114	130	74	M20x70	3/4x2"1/2	4225
230	**OL6705-08**	2"1/2	76,6	63	123,80	180	58,70	152	160	90	M24x80	----	4275
200	**OL6705-09**	3"	90,0	73	152,40	208	71,40	178	180	110	M30x100	----	4337

OL6720 OL6725 Flange a saldare di testa tubo metrico foro cilindrico


Metric Pipe Cylindric Hole Weld On Flanges

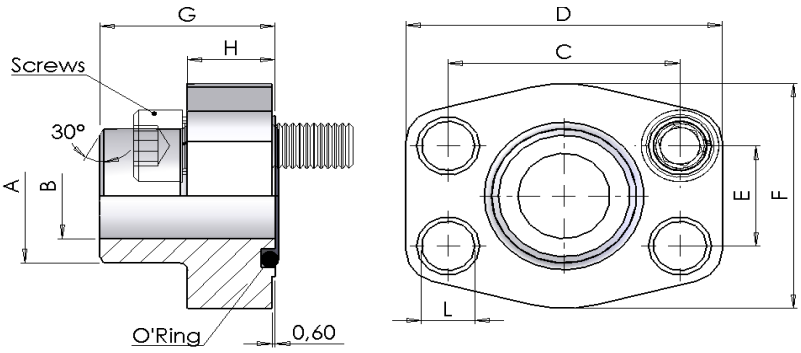

max pressure	part number	SAE	Dimensions									Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	L	Metric	Unc	type
	3000 psi													
345	**OL6720-01**	3/4"	25,0	19	47,63	65	22,23	50	36	18	11,0	M10x35	3/8x1"1/2	4100
	OL6720-02	1"	30,0	22	52,37	70	26,19	55	38	18	11,0	M10x35	3/8x1"1/2	4131
276	**OL6720-03**	1"1/4	38,0	30	58,72	79	30,18	68	41	21	11,5	M10x40	7/16x1"3/4	4150
207	**OL6720-04**	1"1/2	42,0	36	69,85	93	35,71	78	45	25	13,5	M12x45	1/2x1"3/4	4187
	OL6720-05	1"1/2	49,0	38	69,85	93	35,71	78	45	25	13,5	M12x45	1/2x1"3/4	4187
	OL6720-06	2"	49,0	42	77,77	102	42,88	90	45	25	13,5	M12x45	1/2x1"3/4	4225
	OL6720-07	2"	61,0	49	77,77	102	42,88	90	45	25	13,5	M12x45	1/2x1"3/4	4225
172	**OL6720-08**	2"1/2	77,0	62	88,90	114	50,80	105	50	25	13,5	M12x45	1/2x1"3/4	4275
138	**OL6720-09**	3"	77,0	70	106,38	134	61,93	124	51	26	17,5	M16x50	5/8x2"	4337
	OL6720-10	3"	77,0	62	106,38	134	61,93	124	51	26	17,5	M16x50	5/8x2"	4337
34	**OL6720-11**	3"1/2	77,0	70	120,65	152	69,85	136	48	26	17,5	M16x50	5/8x2"	4387
	OL6720-12	3"1/2	90,0	82	120,65	152	69,85	136	48	26	17,5	M16x50	5/8x2"	4387
	OL6720-13	4"	77,0	70	130,18	162	77,77	146	48	26	17,5	M16x50	5/8x2"	4437
	OL6720-14	4"	90,0	82	130,18	162	77,77	146	48	26	17,5	M16x50	5/8x2"	4437
	6000 psi													
414	**OL6725-01**	1/2"	20,0	14	40,49	57	18,24	46	34	16	9	M8x30	5/16x1"1/4	4075
	OL6725-02	3/4"	20,0	14	50,80	71	23,80	55	35	21	11	M10x40	3/8x1"1/2	4100
	OL6725-03	3/4"	25,0	17	50,80	71	23,80	55	35	21	11	M10x40	3/8x1"1/2	4100
	OL6725-04	1"	25,0	19	57,15	81	27,76	65	42	25	13	M12x45	7/16x1"3/4	4131
	OL6725-05	1"	30,0	22	57,15	81	27,76	65	42	25	13	M12x45	7/16x1"3/4	4131
	OL6725-06	1"1/4	38,0	28	66,68	95	31,75	78	44	25	15	M14x45	1/2x1"3/4	4150
	OL6725-07	1"1/2	38,0	28	79,38	112	36,50	94	56	28	17	M16x50	5/8x2"	4187
	OL6725-08	2"	61,0	40	96,82	134	44,45	114	65	37	21	M20x70	3/4x2"1/2	4225
	OL6725-09	2"1/2	76,6	50	123,80	180	58,70	152	80	45	26	M24x80	----	4275

OL6740 Controflange a saldare di testa
OL6745 tubo metrico foro cilindrico

Metric Pipe Cylindric Hole Weld On Counter-Flanges

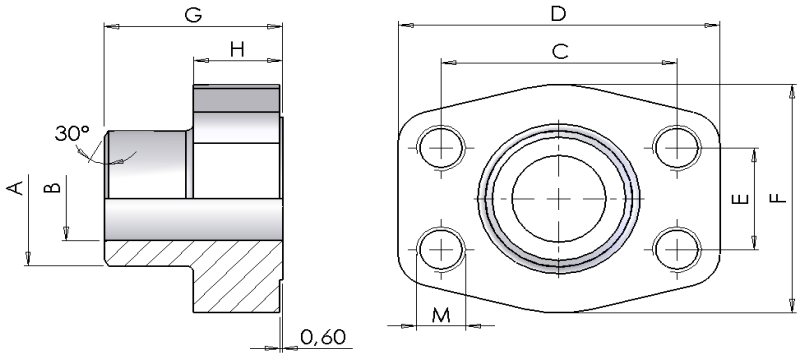


max pressure	part number	SAE	Dimensions								Metric	Unc	
bar		size	A	B	C	D	E	F	G	H	M		
3000 psi													
345	**OL6740-01**	3/4"	25,0	19	47,63	65	22,23	50	36	18	M10	3/8	
	OL6740-02	1"	30,0	22	52,37	70	26,19	55	38	18	M10	3/8	
276	**OL6740-03**	1"1/4	38,0	30	58,72	79	30,18	68	41	21	M10	7/16	
207	**OL6740-04**	1"1/2	42,0	36	69,85	93	35,71	78	45	25	M12	1/2	
	OL6740-05	1"1/2	49,0	38	69,85	93	35,71	78	45	25	M12	1/2	
	OL6740-06	2"	49,0	42	77,77	102	42,88	90	45	25	M12	1/2	
	OL6740-07	2"	61,0	49	77,77	102	42,88	90	45	25	M12	1/2	
172	**OL6740-08**	2"1/2	77,0	62	88,90	114	50,80	105	50	25	M12	1/2	
138	**OL6740-09**	3"	77,0	70	106,38	134	61,93	124	51	26	M16	5/8	
	OL6740-10	3"	77,0	62	106,38	134	61,93	124	51	26	M16	5/8	
34	**OL6740-11**	3"1/2	77,0	70	120,65	152	69,85	136	48	26	M16	5/8	
	OL6740-12	3"1/2	90,0	82	120,65	152	69,85	136	48	26	M16	5/8	
	OL6740-13	4"	77,0	70	130,18	162	77,77	146	48	26	M16	5/8	
	OL6740-14	4"	90,0	82	130,18	162	77,77	146	48	26	M16	5/8	
6000 psi													
414	**OL6745-01**	1/2"	20,0	14	40,49	57	18,24	46	34	16	M8	5/16	
	OL6745-02	3/4"	20,0	14	50,80	71	23,80	55	35	21	M10	3/8	
	OL6745-03	3/4"	25,0	17	50,80	71	23,80	55	35	21	M10	3/8	
	OL6745-04	1"	25,0	19	57,15	81	27,76	65	42	25	M12	7/16	
	OL6745-05	1"	30,0	22	57,15	81	27,76	65	42	25	M12	7/16	
	OL6745-06	1"1/4	38,0	28	66,68	95	31,75	78	44	25	M14	1/2	
	OL6745-07	1"1/4	38,0	26	66,68	95	31,75	78	44	25	M14	1/2	
	OL6745-08	1"1/2	38,0	28	79,38	112	36,50	94	56	28	M16	5/8	
	OL6745-09	1"1/2	48,6	32	79,38	112	36,50	94	56	28	M16	5/8	
	OL6745-10	2"	61,0	40	96,82	134	44,45	114	65	37	M20	3/4	
	OL6745-11	2"1/2	76,6	50	123,80	180	58,70	152	80	45	M24	----	

OL6760
OL6765

Flange a 90° a saldare di testa

Weld On 90° Flanges

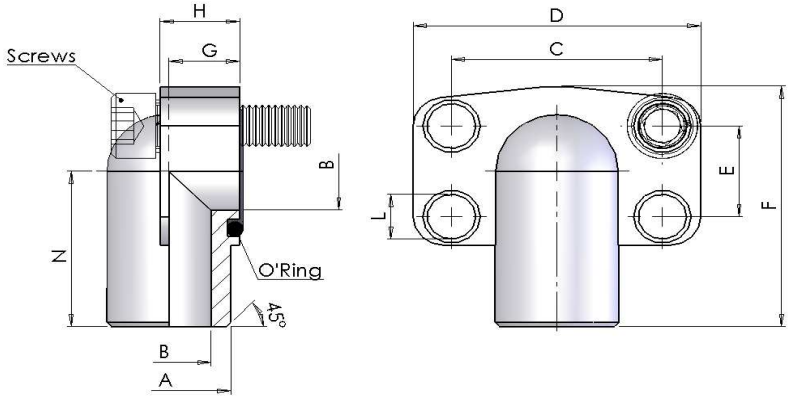


max pressure	part number	SAE	Dimensions										Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	L	N	Metric	Unc	type
	3000 psi														
345	**OL6760-01**	3/4"	27,2	19	47,63	70	22,23	63	23,0	21	11,0	41	M10x40	----	3100
	OL6760-02	1"	34,5	23	52,37	75	26,19	72	25,0	24	11,0	48	M10x40	----	4112
276	**OL6760-03**	1"1/4	43,0	31	58,72	86	30,18	82	27,0	25	11,5	54	M10x45	----	4150
207	**OL6760-04**	1"1/2	50,0	35	69,85	97	35,71	92	31,5	29	14,0	57	M12x60	----	4187
	OL6760-05	2"	65,0	48	77,77	100	42,88	99	37,5	50	14,0	63	M12x70	----	4225
	6000 psi														
414	**OL6765-01**	3/4"	28,0	19	50,80	71	23,80	70	22,0	19	11	40	M10x35	3/8x1"1/2	4100
	OL6765-02	1"	34,0	25	57,15	81	27,76	82	27,0	24	13	47	M12x45	7/16x1"3/4	4131
375	**OL6765-03**	1"1/4	42,0	32	66,68	95	31,75	95	32,0	27	15	56	M14x45	1/2x1"3/4	4150
320	**OL6765-04**	1"1/2	48,0	38	79,38	113	36,50	115	40,0	30	17	68	M16x55	5/8x2"	4187

OL6780
OL6785

Flange a 90° a saldare di testa


Weld On 90° Flanges

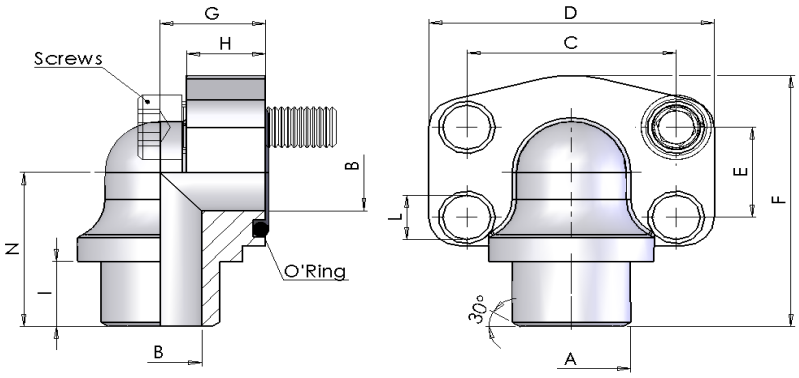

max pressure	part number	SAE	Dimensions											Viti Screws		OR
bar		size	A	B	C	D	E	F	G	H	I	L	N	Metric	Unc	type
3000 psi																
345	**OL6780-01**	1/2"	21,5	13	38,10	54	17,48	60	20,0	16	16,0	9	37	M8x30	5/16x1"1/4	4075
	OL6780-02	1/2"	17,5	13	38,10	54	17,48	60	20,0	16	16,0	9	37	M8x30	5/16x1"1/4	4075
	OL6780-03	3/4"	27,0	19	47,63	65	22,23	63	24,0	18	16,0	11	38	M10x35	3/8x1"1/2	4100
	OL6780-04	1"	34,5	25	52,37	70	26,19	70	28,0	19	19,0	11	43	M10x35	3/8x1"1/2	4131
276	**OL6780-05**	1"1/4	42,8	32	58,72	79	30,18	85	34,0	21	21,0	12	51	M10x40	7/16x1"3/4	4150
207	**OL6780-06**	1"1/2	48,6	38	69,85	93	35,71	95	38,0	25	21,0	14	56	M12x45	1/2x1"3/4	4187
	OL6780-07	2"	61,0	51	77,77	110	42,88	110	42,0	25	15,0	14	65	M12x45	1/2x1"3/4	4225
6000 psi																
414	**OL6785-01**	1/2"	21,5	13	40,49	54	18,24	60	20,0	16	16,0	9	37	M8x30	5/16x1"1/4	4075
	OL6785-02	1/2"	17,5	13	40,49	54	18,24	60	20,0	16	16,0	9	37	M8x30	5/16x1"1/4	4075
	OL6785-03	3/4"	28,0	19	50,80	70	23,80	70	28,0	19	17,0	11	43	M10x40	3/8x1"1/2	4100
	OL6785-04	1"	34,0	25	57,15	79	27,76	85	34,0	21	19,0	13	51	M12x45	7/16x1"3/4	4131
	OL6785-05	1"1/4	42,8	32	66,68	93	31,75	95	38,0	25	19,0	15	56	M14x45	1/2x1"3/4	4150
	OL6785-06	1"1/2	48,6	38	79,38	110	36,50	110	42,0	25	24,0	17	65	M16x50	5/8x2"	4187
	OL6785-07	2"	61,0	51	96,82	134	44,45	132	45,0	35	18,0	21	75	M20x70	3/4x2"1/2	4225
	OL6785-08	2"	61,0	40	96,82	134	44,45	132	45,0	35	18,0	21	75	M20x70	3/4x2"1/2	4225
	OL6785-09	2"	76,0	50	96,82	134	44,45	132	45,0	35	18,0	21	75	M20x70	3/4x2"1/2	4225

OL6800
OL6805
Flange cieche

Blind Flanges

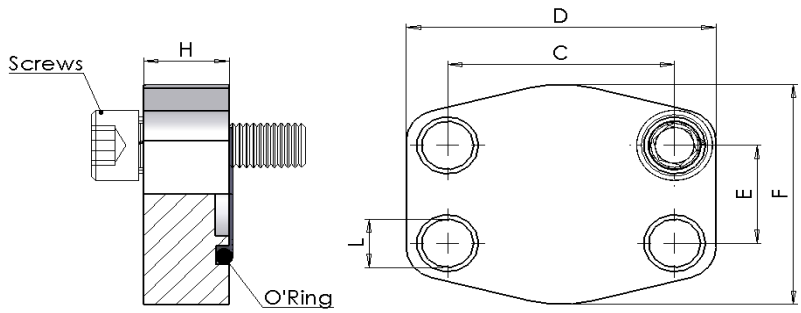


max pressure	part number	SAE	Dimensions						Viti Screws		OR
bar		size	C	D	E	F	H	L	Metric	Unc	type
	3000 psi										
345	**OL6800-01**	1/2"	38,10	56	17,48	46	16	9,0	M8x30	5/16x1"1/4	4075
	OL6800-02	3/4"	47,63	65	22,23	50	18	11,0	M10x35	3/8x1"1/2	4100
	OL6800-03	1"	52,37	70	26,19	60	19	11,0	M10x35	3/8x1"1/2	4131
276	**OL6800-04**	1"1/4	58,72	79	30,18	68	18	11,5	M10x40	7/16x1"3/4	4150
207	**OL6800-05**	1"1/2	69,85	93	35,71	78	20	13,5	M12x45	1/2x1"3/4	4187
	OL6800-06	2"	77,77	102	42,88	90	20	13,5	M12x45	1/2x1"3/4	4225
172	**OL6800-07**	2"1/2	88,90	114	50,80	105	20	13,5	M12x45	1/2x1"3/4	4275
138	**OL6800-08**	3"	106,38	134	61,93	124	24	17,5	M16x50	5/8x2"	4337
34	**OL6800-09**	3"1/2	120,65	152	69,85	136	22	17,5	M16x50	5/8x2"	4387
	OL6800-10	4"	130,18	162	77,77	146	25	17,5	M16x50	5/8x2"	4437
	6000 psi										
414	**OL6805-01**	1/2"	40,49	56	18,24	48	16	9	M8x30	5/16x1"1/4	4075
	OL6805-02	3/4"	50,80	71	23,80	60	19	11	M10x35	3/8x1"1/2	4100
	OL6805-03	1"	57,15	81	27,76	70	24	13	M12x45	7/16x1"3/4	4131
	OL6805-04	1"1/4	66,68	95	31,75	78	27	15	M14x45	1/2x1"3/4	4150
	OL6805-05	1"1/2	79,38	112	36,50	94	30	17	M16x50	5/8x2"	4187
	OL6805-06	2"	96,82	134	44,45	114	30	21	M20x60	3/4x2"1/2	4225
	OL6805-07	2"1/2	123,80	180	58,70	152	45	26	M24x80	-	4275
	OL6805-08	3"	152,40	208	71,40	178	55	33	M30x100	-	4337

OL6820
OL6825

Controflange cieche

Blind Counter-Flanges

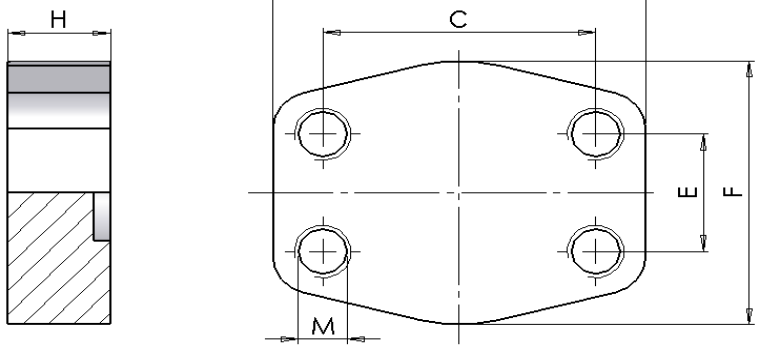


max pressure	part number	SAE	Dimensions					Metric	Unc	
bar		size	C	D	E	F	H	M		
			3000 psi							
345	**OL6820-01**	1/2"	38,10	56	17,48	46	16	M8x30	5/16	
	OL6820-02	3/4"	47,63	65	22,23	50	18	M10x35	3/8	
	OL6820-03	1"	52,37	70	26,19	60	19	M10x35	3/8	
276	**OL6820-04**	1"1/4	58,72	79	30,18	68	18	M10x40	7/16	
207	**OL6820-05**	1"1/2	69,85	93	35,71	78	20	M12x45	1/2	
	OL6820-06	2"	77,77	102	42,88	90	20	M12x45	1/2	
172	**OL6820-07**	2"1/2	88,90	114	50,80	105	20	M12x45	1/2	
138	**OL6820-08**	3"	106,38	134	61,93	124	24	M16x50	5/8	
34	**OL6820-09**	3"1/2	120,65	152	69,85	136	22	M16x50	5/8	
	OL6820-10	4"	130,18	162	77,77	146	25	M16x50	5/8	
			6000 psi							
414	**OL6825-01**	1/2"	40,49	56	18,24	48	16	M8x30	5/16	
	OL6825-02	3/4"	50,80	71	23,80	60	19	M10x35	3/8	
	OL6825-03	1"	57,15	81	27,76	70	24	M12x45	7/16	
	OL6825-04	1"1/4	66,68	95	31,75	78	27	M14x45	1/2	
	OL6825-05	1"1/2	79,38	112	36,50	94	30	M16x50	5/8	
	OL6825-06	2"	96,82	134	44,45	114	30	M20x60	3/4	
	OL6825-07	2"1/2	123,80	180	58,70	152	45	M24x100	----	
	OL6825-08	3"	152,40	208	71,40	178	55	M30x100	----	

Flange SAE / SAE Flanges

OL6840
OL6845

Semiflange tagliate

Cut Split Flanges

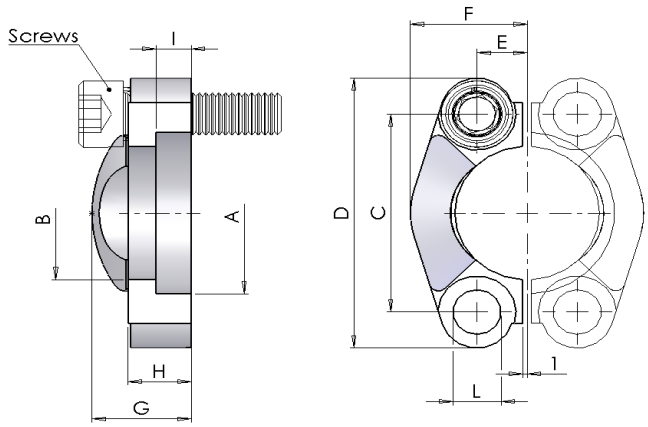


max pressure	part number	SAE	Dimensions										Viti Screws		
bar		size	A	B	C	D	E	F	G	H	I	L	Metric	Unc	
		3000 psi													
345	**OL6840-01**	1/2"	30,96	24,26	38,10	54	8,74	22,8	19	13	6,22	8,75	M8x30	5/16x1"1/4	
	OL6840-02	3/4"	38,89	32,13	47,63	65	11,13	25,9	22	14	6,22	10,75	M10x35	3/8x1"1/2	
	OL6840-03	1"	45,24	38,48	52,37	70	13,08	29,2	24	16	7,49	10,75	M10x35	3/8x1"1/2	
276	**OL6840-04**	1"1/4	51,59	43,69	58,72	79	15,09	36,3	22	14	7,49	12,00	M10x35	----	
207	**OL6840-05**	1"1/2	61,09	50,80	69,85	94	17,86	41,1	25	16	7,49	13,50	M12x35	----	
	OL6840-06	2"	72,24	62,74	77,77	102	21,44	48,2	26	16	9,02	13,50	M12x35	----	
172	**OL6840-07**	2"1/2	84,94	74,93	88,90	114	25,40	54,1	38	19	9,02	13,50	M12x40	1/2x1"3/4	
138	**OL6840-08**	3"	102,39	90,93	106,38	135	30,96	65,3	41	22	9,02	17,00	M16x50	5/8x2"	
34	**OL6840-09**	3"1/2	115,1	102,36	120,65	152	34,92	69,5	28	22	10,72	17,00	M16x50	5/8x2"	
	OL6840-10	4"	127,79	115,06	130,18	162	38,88	76,0	35	25	10,72	17,00	M16x50	5/8x2"	
		6000 psi													
414	**OL6845-01**	1/2"	32,54	24,64	40,49	56	9,12	23,6	22	16	7,24	8,75	M8x30	5/16x1"1/4	
	OL6845-02	3/4"	42,06	32,51	50,80	71	11,91	30,0	28	19	8,26	11,00	M10x35	3/8x1"1/2	
	OL6845-03	1"	48,41	38,86	57,15	81	13,89	34,8	33	24	9,02	13,00	M12x45	----	
	OL6845-04	1"1/4	54,76	44,45	66,68	95	15,88	38,6	38	27	9,78	15,00	----	----	
	OL6845-05	1"1/2	64,29	51,56	79,38	113	18,26	47,5	43	30	12,07	17,00	M16x50	5/8x2"	
	OL6845-06	2"	80,16	67,56	96,82	133	22,23	56,9	52	37	12,07	21,00	M20x70	3/4x2"1/2	

Flange SAE / SAE Flanges

OL6860
OL6865

Semiflange intere

Uncut Split Flanges

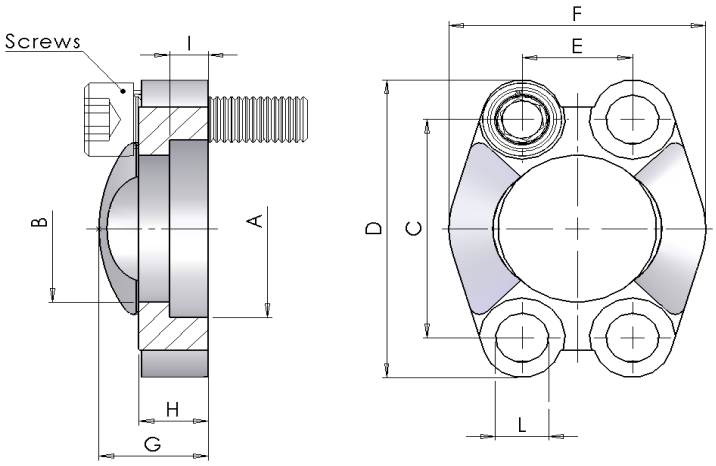


max pressure	part number	SAE	Dimensions										Viti Screws		
bar		size	A	B	C	D	E	F	G	H	I	L	Metric	Unc	
		3000 psi													
345	**OL6860-01**	1/2"	30,96	24,26	38,10	54	17,48	45,6	19	13	6,22	8,75	M8x30	5/16x1"1/4	
	OL6860-02	3/4"	38,89	32,13	47,63	65	22,23	51,8	22	14	6,22	10,75	M10x35	3/8x1"1/2	
	OL6860-03	1"	45,24	38,48	52,37	70	26,19	58,4	24	16	7,49	10,75	M10x35	3/8x1"1/2	
276	**OL6860-04**	1"1/4	51,59	43,69	58,72	79	30,18	72,6	22	14	7,49	12,00	M10x35	----	
207	**OL6860-05**	1"1/2	61,09	50,80	69,85	94	35,71	82,2	25	16	7,49	13,50	M12x35	----	
	OL6860-06	2"	72,24	62,74	77,77	102	42,88	96,4	26	16	9,02	13,50	M12x35	----	
172	**OL6860-07**	2"1/2	84,94	74,93	88,90	114	50,80	108,2	38	19	9,02	13,50	M12x40	1/2x1"3/4	
138	**OL6860-08**	3"	102,39	90,93	106,38	135	61,93	130,6	41	22	9,02	16,75	M16x50	5/8x2"	
34	**OL6860-09**	3"1/2	115,1	102,36	120,65	152	69,85	139,0	28	22	10,72	17,00	M16x50	5/8x2"	
	OL6860-10	4"	127,79	115,06	130,18	162	77,77	152,0	35	25	10,72	17,00	M16x50	5/8x2"	
		6000 psi													
414	**OL6865-01**	1/2"	32,54	24,64	40,49	56	18,24	47,2	22	16	7,24	8,75	M8x30	5/16x1"1/4	
	OL6865-02	3/4"	42,06	32,51	50,80	71	23,80	60,0	28	19	8,26	11,00	M10x35	3/8x1"1/2	
	OL6865-03	1"	48,41	38,86	57,15	81	27,76	69,6	33	24	9,02	13,00	M12x45	----	
	OL6865-04	1"1/4	54,76	44,45	66,68	95	31,75	77,2	38	27	9,78	15,00	M14x45	----	
	OL6865-05	1"1/2	64,29	51,56	79,38	113	36,50	95,0	43	30	12,07	17,00	M16x50	5/8x2"	
	OL6865-06	2"	80,16	67,56	96,82	133	44,45	113,8	52	37	12,07	21,00	M20x70	3/4x2"1/2	

OL6880
OL6885

Semiflange piatte tagliate


Cut Flat Split Flanges

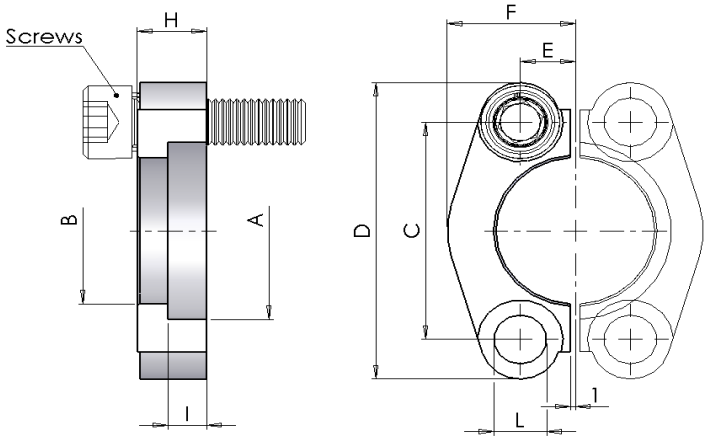

max pressure	part number	SAE	Dimensions									Viti Screws		
bar		size	A	B	C	D	E	F	H	I	L	Metric	Unc	
	3000 psi													
345	**OL6880-01**	1/2"	30,96	24,26	38,10	54	8,74	22,8	13	6,22	8,75	M8x30	5/16x1"1/4	
	OL6880-02	3/4"	38,89	32,13	47,63	65	11,13	25,9	14	6,22	10,75	M10x35	3/8x1"1/2	
	OL6880-03	1"	45,24	38,48	52,37	70	13,08	29,2	16	7,49	10,75	M10x35	3/8x1"1/2	
276	**OL6880-04**	1"1/4	51,59	43,69	58,72	79	15,09	36,3	16	7,49	12,00	M10x35	----	
207	**OL6880-05**	1"1/2	61,09	50,80	69,85	94	17,86	41,1	16	7,49	13,50	M12x35	----	
	OL6880-06	2"	72,24	62,74	77,77	102	21,44	48,2	16	9,02	13,50	M12x35	----	
	6000 psi													
414	**OL6885-01**	1/2"	32,54	24,64	40,49	56	9,12	23,6	16	7,24	8,75	M8x30	5/16x1"1/4	
	OL6885-02	3/4"	42,06	32,51	50,80	71	11,91	30,0	19	8,26	11,00	M10x35	3/8x1"1/2	
	OL6885-03	1"	48,41	38,86	57,15	81	13,89	34,8	24	9,02	13,00	M12x45	----	
	OL6885-04	1"1/4	54,76	44,45	66,68	95	15,88	38,6	27	9,78	15,00	M14x45	----	
	OL6885-05	1"1/2	64,29	51,56	79,38	113	18,26	47,5	30	12,07	17,00	M16x50	5/8x2"	
	OL6885-06	2"	80,16	67,56	96,82	133	22,23	56,9	37	12,07	21,00	M20x70	3/4x2"1/2	

OL6900 OL6905 Codoli a saldare di testa per tubo metrico

Weld On Adaptors for Metric Tube

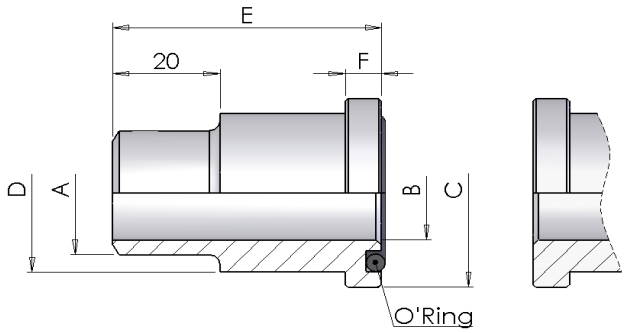


TIPO **A** TIPO **B**

max pressure	part number	SAE	Dimensions						OR
bar		size	**A**	**B**	**C**	**D**	**E**	**F**	type
	3000 psi								
345	**OL6900-01**	1/2"	16,0	12	30,2	24,0	41	6,73	4075
	OL6900-02	3/4"	25,0	19	38,1	32,0	50	6,73	4100
	OL6900-03	1"	30,0	22	44,4	38,0	50	8,00	4131
276	**OL6900-04**	1"1/4	38,0	28	50,8	43,0	55	8,00	4150
207	**OL6900-05**	1"1/2	45,0	35	60,3	50,0	57	8,00	4187
	OL6900-06	2"	60,0	50	71,4	62,0	57	9,53	4225
172	**OL6900-07**	2"1/2	70,0	55	84,1	74,0	58	9,53	4275
138	**OL6900-08**	3"	80,0	68	101,6	90,0	60	9,53	4337
34	**OL6900-09**	3"1/2	100,0	89	114,3	102,0	80	11,20	4387
	OL6900-10	4"	114,3	99	127,0	114,3	80	11,20	4437
	6000 psi								
414	**OL6905-01**	1/2"	16,0	12	31,8	24,0	34	7,75	4075
	OL6905-02	3/4"	25,0	18	41,3	32,0	38	8,76	4100
	OL6905-03	1"	30,0	22	47,6	38,0	40	9,53	4131
	OL6905-04	1"1/4	38,0	27	54,0	44,0	45	10,29	4150
	OL6905-05	1"1/2	45,0	32	63,5	51,0	50	12,57	4187
	OL6905-06	2"	60,0	45	79,4	67,0	58	12,57	4225

OL6920 OL6925 Codoli a saldare di testa

Weld On Adaptors

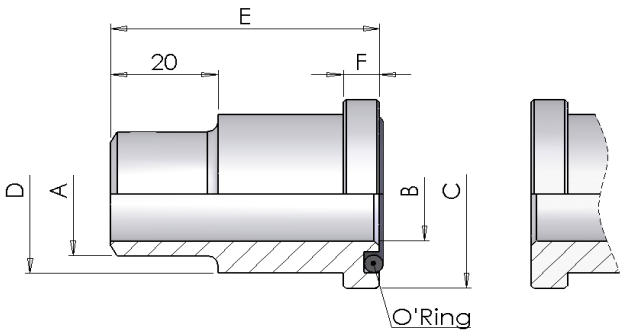


TIPO **A** TIPO **B**

max pressure	part number	SAE	Dimensions						OR
bar		size	**A**	**B**	**C**	**D**	**E**	**F**	type
	3000 psi								
345	**OL6920-01**	1/2"	21,5	13	30,2	24	41	6,73	4075
	OL6920-02	3/4"	28,0	19	38,1	32	50	6,73	4100
	OL6920-03	1"	34,0	25	44,4	38	50	8,00	4131
276	**OL6920-04**	1"1/4	42,8	32	50,8	43	55	8,00	4150
207	**OL6920-05**	1"1/2	48,6	38	60,3	50	57	8,00	4187
	OL6920-06	2"	61,0	51	71,4	62	57	9,53	4225
	6000 psi								
414	**OL6925-01**	1/2"	21,5	13	31,8	24	34	7,75	4075
	OL6925-02	3/4"	28,0	19	41,3	32	38	8,76	4100
	OL6925-03	1"	34,0	25	47,6	38	40	9,53	4131
	OL6925-04	1"1/4	42,8	32	54,0	44	45	10,29	4150
	OL6925-05	1"1/2	48,6	38	63,5	51	50	12,57	4187
	OL6925-06	2"	61,0	51	79,4	67	58	12,57	4225

OL6940 OL6945 Codoli Filettati BSPT

BSP Tapered Threaded Adaptors

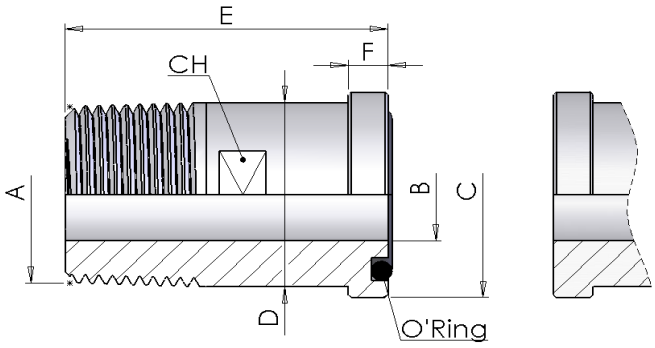


TIPO **A** TIPO **B**

max pressure	part number	SAE	Dimensions							OR
bar		size	**A**	**B**	**C**	**D**	**E**	**F**	**CH**	type
	3000 psi									
345	**OL6940-01**	1/2"	1/2" - BSPT	12	30,2	24	50	6,73	19	4075
	OL6940-02	3/4"	3/4" - BSPT	17	38,1	32	55	6,73	27	4100
	OL6940-03	1"	1" - BSPT	22	44,4	38	60	8,00	32	4131
276	**OL6940-04**	1"1/4	1"1/4 - BSPT	27	50,8	43	65	8,00	41	4150
207	**OL6940-05**	1"1/2	1"1/2 - BSPT	32	60,3	50	70	8,00	46	4187
	OL6940-06	2"	2" - BSPT	40	71,4	62	75	9,53	55	4225
	6000 psi									
414	**OL6945-01**	1/2"	1/2" - BSPT	12	31,8	24	50	7,75	19	4075
	OL6945-02	3/4"	3/4" - BSPT	17	41,3	32	60	8,76	26	4100
	OL6945-03	1"	1" - BSPT	22	47,6	38	70	9,53	32	4131
	OL6945-04	1"1/4	1"1/4 - BSPT	27	54,0	44	75	10,29	36	4150
	OL6945-05	1"1/2	1"1/2 - BSPT	32	63,5	51	80	12,57	41	4187
	OL6945-06	2"	2" - BSPT	40	79,4	67	90	12,57	55	4225

OL6960 OL6965 Codoli Filettati Metrici attacco DIN 3901-3902


DIN 3901-3902 Metric Threaded Adaptors

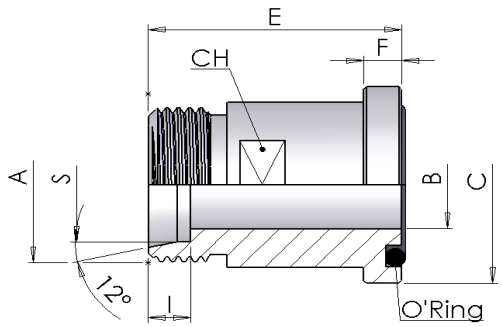

max pressure	part number	SAE	Dimensions									OR
bar		size	A	type	B	C	E	F	I	S	CH	type
	3000 psi											
315	**OL6960-01**	1/2"	M22x1,5	L	12	30,2	48	6,73	7,0	15	24	4075
350	**OL6960-02**	1/2"	M24x1,5	S	12	30,2	50	6,73	8,5	16	24	4075
315	**OL6960-03**	3/4"	M26x1,5	L	15	38,1	53	6,73	7,5	18	30	4100
160	**OL6960-04**	3/4"	M30x2	L	19	38,1	53	6,73	7,5	22	30	4100
350	**OL6960-05**	3/4"	M30x2	S	16	38,1	57	6,73	10,5	20	30	4100
	OL6960-06	3/4"	M36x2	S	17	38,1	57	6,73	12,0	25	30	4100
160	**OL6960-07**	1"	M30x2	L	19	44,4	56	8,00	7,5	22	27	4131
	OL6960-08	1"	M36x2	L	24	44,4	54	8,00	7,5	28	36	4131
350	**OL6960-09**	1"	M36x2	S	20	44,4	58	8,00	12,0	25	36	4131
	OL6960-10	1"	M42x2	S	24	44,4	63	8,00	13,5	30	36	4131
160	**OL6960-11**	1"1/4	M36x2	L	22	50,8	58	8,00	7,5	28	36	4150
	OL6960-12	1"1/4	M45x2	L	30	50,8	58	8,00	10,5	35	41	4150
280	**OL6960-13**	1"1/4	M36x2	S	20	50,8	60	8,00	12,0	25	41	4150
	OL6960-14	1"1/4	M42x2	S	25	50,8	62	8,00	13,5	30	41	4150
	OL6960-15	1"1/4	M52x2	S	28	50,8	66	8,00	16,0	38	41	4150
160	**OL6960-16**	1"1/2	M52x2	L	36	60,3	64	8,00	11,0	42	46	4187
210	**OL6960-17**	1"1/2	M52x2	S	32	60,3	70	8,00	16,0	38	46	4187
	6000 psi											
400	**OL6965-01**	1/2"	M24x1,5	S	12	31,8	53	7,75	8,5	16	24	4075
	OL6965-02	3/4"	M24x1,5	S	12	41,3	59	8,76	8,5	16	30	4100
	OL6965-03	3/4"	M30x2	S	16	41,3	61	8,76	10,5	20	30	4100
	OL6965-04	3/4"	M36x2	S	17	41,3	63	8,76	12,0	25	30	4100
	OL6965-05	3/4"	M42x2	S	18	41,3	64	8,76	13,5	30	36	4100
	OL6965-06	1"	M36x2	S	20	47,6	72	9,53	12,0	25	36	4131
	OL6965-07	1"	M42x2	S	24	47,6	74	9,53	13,5	30	36	4131
	OL6965-08	1"1/4	M42x2	S	25	54,0	79	10,29	13,5	30	41	4150
	OL6965-09	1"1/4	M52x2	S	30	54,0	83	10,29	16,0	38	46	4150
	OL6965-10	1"1/2	M52x2	S	30	63,5	89	12,57	16,0	38	46	4187

OL6980 Raccordi Diritti Filettati Metrici DIN 2353


DIN 2353 Metric Threaded Straight Connectors

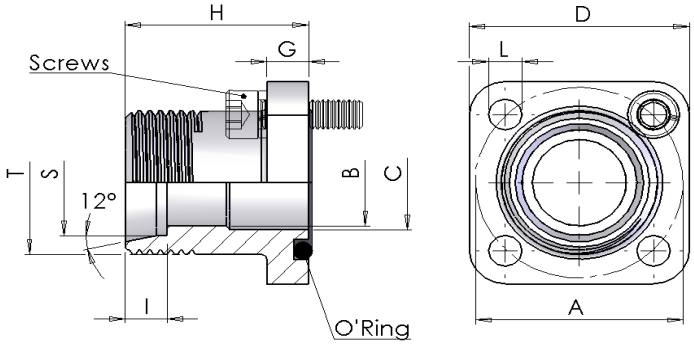

max pressure	part number	Dimensions									Viti Screws	OR
bar		A	B	C	D	S	T	G	H	L	Metric	type
315	**OL6980-01**	35	8	12	39	10	M16x1,5	8	30	6,4	M6x20	3075
	OL6980-02	35	10	12	39	12	M18x1.5	8	30	6,4	M6x20	3075
250	**OL6980-03**	35	12	12	39	15	M22x1.5	8	30	6,4	M6x20	3075
	OL6980-04	35	12	12	39	16	M24x1.5	8	30	6,4	M6x20	3075
	OL6980-05	35	12	12	39	18	M26x1.5	8	30	6,4	M6x20	3075
100	**OL6980-06**	40	12	19	42	15	M22x1.5	8	35	6,4	M6x20	132
	OL6980-07	40	15	19	42	18	M26x1.5	8	35	6,4	M6x20	132
	OL6980-08	40	19	19	42	22	M30x2	8	35	6,4	M6x20	132
	OL6980-09	40	20	20	42	28	M36x2	8	42	6,4	M6x20	132

OL7000 Raccordi a 4 Fori a 90° Filettati Metrici DIN 2353


DIN 2353 Metric Threaded 90° Connectors with 4 Fixing Holes

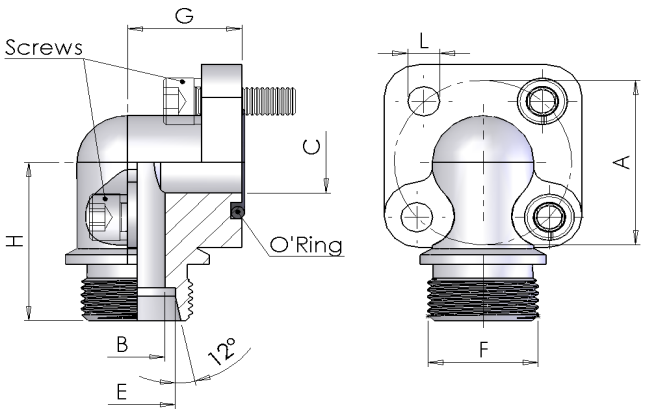

max pressure	part number	Dimensions								Viti Screws	OR
bar		A	B	C	E	F	G	H	L	Metric	type
300	**OL7000-01**	35	8	13	10	M16x1,5	18	41,5	6,4	N.2 M6x35 N.2 M6x20	3075
300	**OL7000-02**	35	10	13	12	M18x1.5	18	41,5	6,4	N.2 M6x35 N.2 M6x20	3075
250	**OL7000-03**	35	12	13	15	M22x1.5	18	41,5	6,4	N.2 M6x35 N.2 M6x20	3075
250	**OL7000-04**	35	12	13	16	M24x1.5	18	41,5	6,4	N.2 M6x35 N.2 M6x20	3075
250	**OL7000-05**	35	12	13	18	M26x1.5	18	41,5	6,4	N.2 M6x35 N.2 M6x20	3075
100	**OL7000-06**	40	12	19	15	M22x1.5	24	41,5	6,4	N.2 M6x45 N.2 M6x20	132
100	**OL7000-07**	40	15	19	18	M26x1.5	24	41,5	6,4	N.2 M6x45 N.2 M6x20	132
100	**OL7000-08**	40	17	19	22	M30x2	24	41,5	6,4	N.2 M6x45 N.2 M6x20	132

OL7020 Raccordi a 4 Fori a 90° Filettati BSP


BSP Threaded 90° Connectors with 4 Fixing Holes

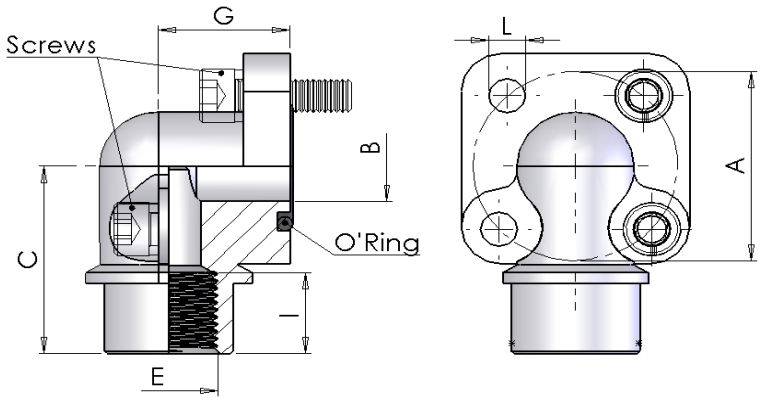

max pressure	part number	Dimensions							Viti Screws	OR
bar		A	B	C	D	E	G	L	Metric	type
300	**OL7020-01**	35	13	41,5	16	3/8"GAS	18	6,4	N.2 M6x35 N.2 M6x20	3075
300	**OL7020-02**	35	13	41,5	19	1/2"GAS	18	6,4	N.2 M6x35 N.2 M6x20	3075
300	**OL7020-03**	40	19	41,5	19	1/2"GAS	24	6,4	N.2 M6x45 N.2 M6x20	132
300	**OL7020-04**	40	19	41,5	19	3/4"GAS	24	6,4	N.2 M6x45 N.2 M6x20	132

OL7040 Raccordi Pompa 3 Fori

Pump Elbows With Three Fixing Holes

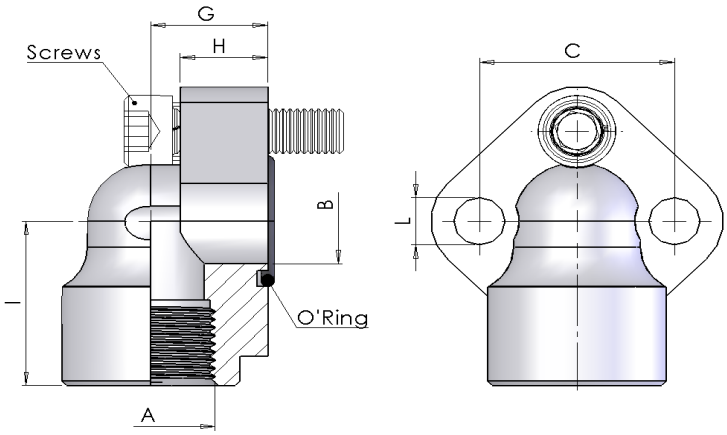


max pressure	part number	Gruppo Pompa	Dimensions							Viti Screws	OR
bar			A	B	C	G	H	I	L	Metric	type
300	**OL7040-01**	0,5	3/8" GAS	11	26	17	8	24	5,3	M5x20	2056
300	**OL7040-02**	0,5	1/2" GAS	11	26	17	8	24	5,3	M5x20	2056
300	**OL7040-03**	1,0	3/8" GAS	12	30	17	8	24	6,4	M6x20	121
300	**OL7040-04**	1,0	1/2" GAS	12	30	17	8	26	6,4	M6x20	121
300	**OL7040-05**	2,0	1/2" GAS	19	40	21	10	30	8,5	M8x25A	132
300	**OL7040-06**	2,0	3/4" GAS	19	40	21	10	30	8,5	M8x25A	132
300	**OL7040-07**	3,0	3/4" GAS	26	51	26	13	45	10,5	M10x30A	3125
300	**OL7040-08**	3,0	1" GAS	26	51	26	13	45	10,5	M10x30A	3125
300	**OL7040-09**	3,0	3/4" GAS	26	56	26	13	45	10,5	M10x30A	3125
300	**OL7040-10**	3,0	1" GAS	26	56	26	13	45	10,5	M10x30A	3125


OL7060
OL7065


Kit per flange SAE - (Metrico)*

*Kit for SAE flanges - (Metric)**









part number	SAE	OR			Viti Screws	Rondelle Washers
	size	code	d1	d2	code	code
3000 psi						
OL7060-01	1/2"	8-4075	18,64	3,53	VSEIM-08x30	RVSM-08
OL7060-02	3/4"	8-4100	24,99	3,53	VSEIM-10x35	RVSM-10
OL7060-03	1"	8-4131	32,92	3,53	VSEIM-10x40	RVSM-10
OL7060-04	1"1/4	8-37.69X3.53	37,69	3,53	VSEIM-10x40	RVSM-10
OL7060-05	1"1/2	8-4187	47,22	3,53	VSEIM-12x45	RVSM-12
OL7060-06	2"	8-4225	56,74	3,53	VSEIM-12x45	RVSM-12
OL7060-07	2"1/2	8-4275	69,44	3,53	VSEIM-12x45	RVSM-12
OL7060-08	3"	8-4337	85,32	3,53	VSEIM-16x50	RVSM-16
OL7060-09	3"1/2	8-4387	98,02	3,53	VSEIM-16x50	RVSM-16
OL7060-10	4"	8-4437	110,72	3,53	VSEIM-16x50	RVSM-16
6000 psi						
OL7065-01	1/2"	8-4075	18,64	3,53	VSEIM-08x30	RVSM-08
OL7065-02	3/4"	8-4100	24,99	3,53	VSEIM-10x40	RVSM-10
OL7065-03	1"	8-4131	32,92	3,53	VSEIM-12x45	RVSM-12
OL7065-04	1"1/4	8-37.69X3.53	37,69	3,53	VSEIM-14x45	RVSM-14
OL7065-05	1"1/2	8-4187	47,22	3,53	VSEIM-16x50	RVSM-16
OL7065-06	2"	8-4225	56,74	3,53	VSEIM-20x70	RVSM-20
OL7065-07	2"1/2	8-4275	69,44	3,53	VSEIM-24x80	RVSM-24
OL7065-08	3"	8-4337	85,32	3,53	VSEIM-30x100	RVSM-30

*** -** Il Kit per flange SAE (metrico), è composto da n.4 viti metriche, n. 4 rondelle e da 1 o-ring.


*** -** *The Kit for SAE flanges (metric), is composed by n.4 metric screws, n. 4 washers and n.1 o-ring.*


OL7080
OL7085


Kit per flange SAE - (UNC)*

*Kit for SAE flanges - (UNC)**









part number	SAE	OR			Viti	Rondelle
					Screws	Washers
	size	code	d1	d2	code	code
3000 psi						
OL7080-01	1/2"	8-4075	18,64	3,53	VSEIU-5/16x1-1/4	RVSU-5/16
OL7080-02	3/4"	8-4100	24,99	3,53	VSEIU-3/8x1-1/2	RVSU-3/8
OL7080-03	1"	8-4131	32,92	3,53	VSEIU-3/8x1-1/2	RVSU-3/8
OL7080-04	1"1/4	8-37.69X3.53	37,69	3,53	VSEIU-7/16x1-3/4	RVSU-7/16
OL7080-05	1"1/2	8-4187	47,22	3,53	VSEIU-1/2x1-3/4	RVSU-1/2
OL7080-06	2"	8-4225	56,74	3,53	VSEIU-1/2x1-3/4	RVSU-1/2
OL7080-07	2"1/2	8-4275	69,44	3,53	VSEIU-1/2x1-3/4	RVSU-1/2
OL7080-08	3"	8-4337	85,32	3,53	VSEIU-5/8x2	RVSU-5/8
OL7080-09	3"1/2	8-4387	98,02	3,53	VSEIU-5/8x2	RVSU-5/8
OL7080-10	4"	8-4437	110,72	3,53	VSEIU-5/8x2	RVSU-5/8
6000 psi						
OL7085-01	1/2"	8-4075	18,64	3,53	VSEIU-5/16x1-1/4	RVSU-5/16
OL7085-02	3/4"	8-4100	24,99	3,53	VSEIU-3/8x1-1/2	RVSU-3/8
OL7085-03	1"	8-4131	32,92	3,53	VSEIU-7/16x1-3/4	RVSU-7/16
OL7085-04	1"1/4	8-37.69X3.53	37,69	3,53	VSEIU-1/2x1-3/4	RVSU-1/2
OL7085-05	1"1/2	8-4187	47,22	3,53	VSEIU-5/8x2	RVSU-5/8
OL7085-06	2"	8-4225	56,74	3,53	VSEIU-3/4x2-1/2	RVSU-3/4

*** -** Il Kit per flange SAE (UNC), è composto da n.4 viti UNC, n. 4 rondelle e da 1 o-ring.

*** -** *The Kit for SAE flanges (UNC), is composed by n.4 UNC screws, n. 4 washers and n.1 o-ring.*