





















Inserto inter-lock / Inter-lock tail







Pagina / Page	312	313		313		313
Ferrules Boccole			**BSPT male**		**NPTF male**	
	OL0120	**OL0130**		**OL0505**		**OL0506**
	4SH	R13		BSPT MALE 60° seat		NPTF MALE 60° seat
				AGR-K		AGN

Pagina / Page	314	314	315	315		316
BSP 60					**JIC male**	
	OL0510	**OL0414**	**OL0618**	**OL0619**		**OL0511**
	BSP MALE 60° seat	BSP FEMALE 60° R	90° Swept Elbow R	4 5° Swept Elbow R		JIC MALE 37°
	AGR	DKR	DKR-90°	DKR-45°		AGJ

Pagina / Page	316	317	317		318	318
JIC 37				**CES / DKOS**		
	OL0962	**OL1001**	**OL1051**		**OL0512**	**OL0413**
	JIC FEMALE 37° R	90° Swept Elbow R	45° Swept Elbow R		M ETRIC MALE 24°	FEMALE 24° OR
	DKJ	DKJ-90°	DKJ-45°		CES	DKOS

Pagina / Page	319	319		320	320	321
DKOS			**ORFS**			
	OL1441	**OL1091**		**OL0432**	**OL0433**	**OL0656**
	90° Swept Elbow OR	45° Swept Elbow OR		ORFS Female	Fe male back hexagon	90° Swept Elbow
	DKOS-90°	DKOS-45°		ORFS	ORFS	ORFS-90°

Pagina / Page	321	322		323	323	324
ORFS			**SAE flange**			
	OL0620	**OL0811**		**OL1601**	**OL1602**	**OL1501**
	45° Swept Elbow	ORFS Male		3000 psi SOLID	3000 psi SOLID 90°	3000 psi SOLID 45°
	ORFS-45°	ORFS		SFL	SFL 90°	SFL 45°

324	325	325		326	326	326
			**Super CAT**			
OL1651	**OL1451**	**OL1551**		**OL1643**	**OL1481**	**OL1571**
6000 psi SOLID	6000 psi SOLID 90°	6000 psi SOLID 45°		9 000 psi SOLID	9000 psi SOLID 90°	9000 psi SOLID 45°
SFS	SFS 90°	SFS 45°		SFC	SFC 90°	SFC 45°

Dimensions and general characteristics may be changed at any time without prior notice.

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product
Any use of the product not in conformance with our instructions may be dangerous.

Gambo Inter-Lock: Dimensioni Disponibili


Inter-Lock Inserts: Available Sizes

Inter-Lock	1/2"	5/8"	3/4"	1"	1.1/4"	1.1/2"	2"	3"

OL0120 Boccola a Pressare (skive)

Swaged Ferrule (skive)

per tubo / for hose:
R9 - 4SP - 4SH

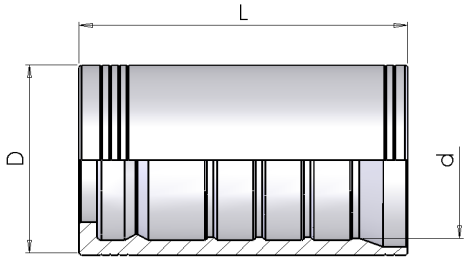


part number	hose I.D.		Dimension			skive	valid for
	in	mm	D	L	d	length	
OL0120-01	3/4	19	38,0	60,0	29,9	52/15	R9-DIN 4SP-4SH--R12-R13-R15
OL0120-02	1	25,4	46,0	74,5	37,3	64/17	4SP-4SH-R12-R13-R15
OL0120-03	1.1/4	31,8	55,0	88,0	44,2	74/22	DIN 4SP - 4SH - R12
OL0120-04	1.1/2	38,1	62,0	94,0	51,3	81/22,5	DIN 4SP - 4SH - R12
OL0120-05	2	50,8	78,0	99,0	66,0	85/30	DIN 4SP - 4SH
					ESTERNO/INTERNO		
					EXTERNAL/INTERNAL		

OL0130 Boccola a Pressare (skive)

Swaged Ferrule (skive)


per tubo / for hose:
R13 - R15

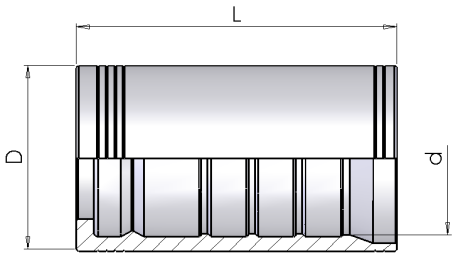

part number	hose I.D.		Dimension			skive	
	in	mm	D	L	d	length	valid for
OL0130-01	1.1/4	31,8	60,0	88,0	49,5	74/22	R13 -R15
OL0130-02	1.1/2	38,1	67,0	94,0	56,0	81/22,5	R13 -R15
OL0130-03	2	50,8	84,5	99,0	71,0	85/30	R13
						ESTERNO/INTERNO	
						EXTERNAL/INTERNAL	

OL0505 Maschio BSPT svas. 60°


(AGR-K) BSP Taper Male 60° cone

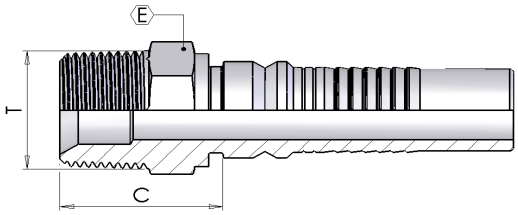

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0505-01	3/4	19	12	3/4-14	27	35
OL0505-02	1	25,4	16	1-11	36	41
OL0505-03	1.1/4	31,8	20	1.1/4-11	46	44
OL0505-04	1.1/2	38,1	24	1.1/2-11	50	47
OL0505-05	2	50,8	32	2-11	65	54

OL0506 Maschio NPTF svas. 60°


(AGN) NPTF Male 60° cone

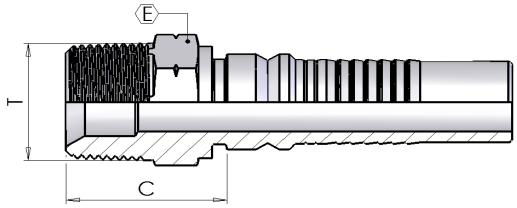

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0506-01	1/2	12,7		1/2-14	22	32
OL0506-02	5/8	15,9		3/4-14	27	32
OL0506-03	3/4	19	12	3/4-14	27	35
OL0506-04	1	25,4	16	1-11.1/2	36	41
OL0506-05	1.1/4	31,8	20	1.1/4-11.1/2	46	44
OL0506-06	1.1/2	38,1	24	1.1/2-11.1/2	50	47
OL0506-07	2	50,8	32	2-11.1/2	65	54

OL0510 Maschio BSP svas. 60°


(AGR) BSP Male Parallel 60° cone

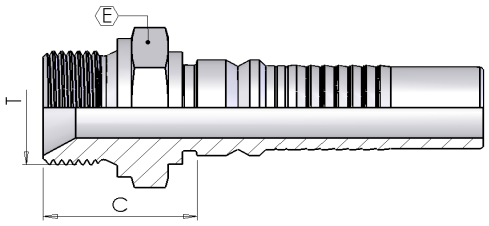


part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0510-01	1/2	12,7		1/2-14	27	30
OL0510-02	5/8	15,9		5/8-14	30	32
OL0510-03	3/4	19	12	3/4-14	32	33
OL0510-04	3/4	19	12	1-11	41	36
OL0510-05	1	25,4	16	1-11	41	37
OL0510-06	1	25,4	16	1.1/4-11	50	41
OL0510-07	1.1/4	31,8	20	1.1/4-11	50	42
OL0510-08	1.1/2	38,1	24	1.1/2-11	55	44
OL0510-09	2	50,8	32	2-11	70	53

OL0414 Femmina BSP cono 60° Dado Spinato

(DKR) BSP Female 60° cone Thrust Wire

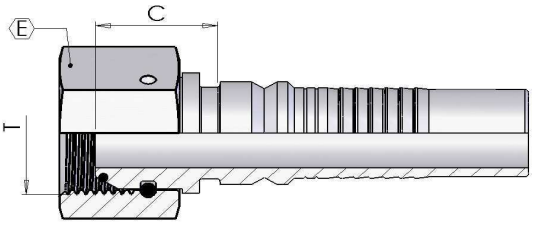





(*) - Femmina BSP con O-Ring
(*) - BSP female with O-Ring

	part number	hose I.D.		Dimension			
				dash	thread	hex	cut-off
		in	mm	size	T	E	C
(*)	**OL0414-01**	1/2	12,7		1/2-14	27	20
(*)	**OL0414-02**	5/8	15,9		5/8-14	27	19,5
(*)	**OL0414-03**	3/4	19	12	3/4-14	32	23
(*)	**OL0414-04**	3/4	19	12	1-11	38	25
(*)	**OL0414-05**	1	25,4	16	1-11	38	26
(*)	**OL0414-06**	1.1/4	31,8	20	1.1/4-11	50	29
(*)	**OL0414-07**	1.1/4	31,8	20	1.1/2-11	55	31
(*)	**OL0414-08**	1.1/2	38,1	24	1.1/2-11	55	31
(*)	**OL0414-09**	2	50,8	32	2-11	70	30

OL0618 Curva BSP 90° cono 60° Dado Spinato

(DKR 90°) BSP 90° Swept Elbow 60° cone Thrust Wire

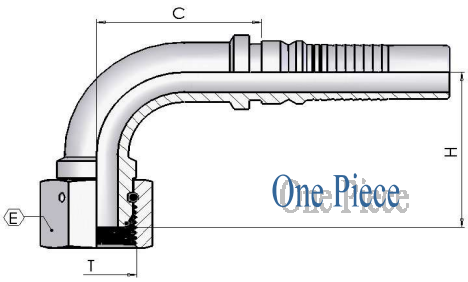





(*) - Femmina BSP con O-Ring
(*) - BSP female with O-Ring

	part number	hose I.D.		Dimension				
				dash	thread	hex	drop	cut-off
		in	mm	size	T	E	H	C
(*)	**OL0618-01**	1/2	12,7		1/2-14	27	41	37
(*)	**OL0618-02**	5/8	15,9		5/8-14	27	47	51
(*)	**OL0618-03**	3/4	19	12	3/4-14	32	57	54
(*)	**OL0618-04**	1	25,4	16	1-11	38	70	73
(*)	**OL0618-05**	1	25,4	16	1.1/4-11	50	76	73
(*)	**OL0618-06**	1.1/4	31,8	20	1.1/4-11	50	83	93
(*)	**OL0618-07**	1.1/2	38,1	24	1.1/2-11	55	104	111
(*)	**OL0618-08**	2	50,8	32	2-11	70	135	122

OL0619 Curva BSP 45° cono 60° Dado Spinato

(DKR 45°) BSP 45° Swept Elbow 60° cone Thrust Wire

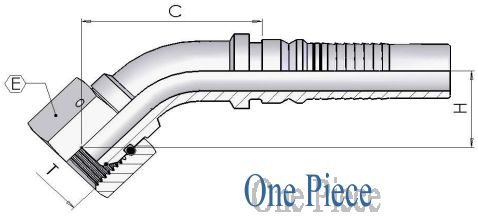




(*) - Femmina BSP con O-Ring
(*) - BSP female with O-Ring

	part number	hose I.D.		Dimension				
				dash	thread	hex	drop	cut-off
		in	mm	size	T	E	H	C
(*)	**OL0619-01**	3/4	19	12	3/4-14	32	28	84
(*)	**OL0619-02**	1	25,4	16	1-11	38	38	112
(*)	**OL0619-03**	1.1/4	31,8	20	1.1/4-11	50	41	137
(*)	**OL0619-04**	1.1/2	38,1	24	1.1/2-11	55	54	166
(*)	**OL0619-05**	2	50,8	32	2-11	70	70	195

OL0511 Maschio JIC cono 74°


(AGJ) JIC Male 74° cone

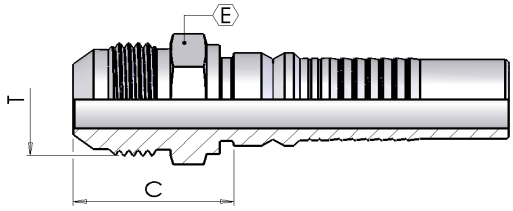

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0511-01	1/2	12,7		3/4-16	19	28
OL0511-02	5/8	15,9		7/8-14	24	32,5
OL0511-03	3/4	19	12	1.1/16-12	27	36
OL0511-04	1	25,4	16	1.5/16-12	34	40
OL0511-05	1.1/4	31,8	20	1.5/8-12	42	44
OL0511-06	1.1/2	38,1	24	1.7/8-12	50	49
OL0511-07	2	50,8	32	2.1/2-12	65	61

OL0962 Femmina JIC svas. 74°Dado Spinato

(DKJ) JIC Female 74° cone Thrust Wire

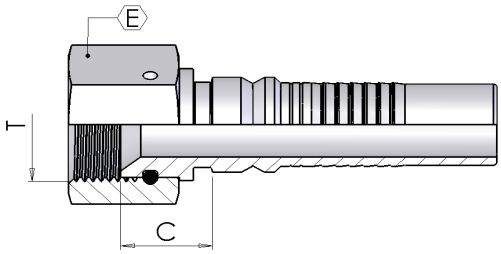


part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0962-01	3/4	19	12	1.1/16-12	32	19
OL0962-02	3/4	19	12	1.5/16-12	41	22
OL0962-03	1	25,4	16	1.5/16-12	41	23
OL0962-04	1.1/4	31,8	20	1.5/16-12	41	24
OL0962-05	1.1/4	31,8	20	1.5/8-12	50	26
OL0962-06	1.1/2	38,1	24	1.7/8-12	55	29
OL0962-07	2	50,8	32	2.1/2-12	70	30

Inserto inter-lock / Inter-lock tail

OL1001 Curva JIC 90° svas. 74° Dado Spinato


(DKJ 90°) JIC 90° Swept Elbow 74° cone Thrust Wire

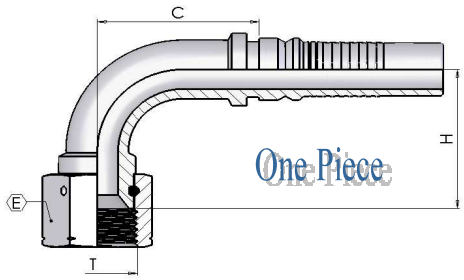

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1001-01	3/4	19	12	1.1/16-12	32	54	54
OL1001-02	3/4	19	12	1.3/16-12	36	57	54
OL1001-03	3/4	19	12	1.5/16-12	41	62	54
OL1001-04	1	25,4	16	1.5/16-12	41	66	77
OL1001-05	1	25,4	16	1.5/8-12	50	77	73
OL1001-06	1.1/4	31,8	20	1.5/8-12	50	86	92
OL1001-07	1.1/2	38,1	24	1.7/8-12	55	100	112
OL1001-08	2	50,8	32	2.1/2-12	70	134	121

OL1051 Curva JIC 45° svas. 74° Dado Spinato


(DKJ 45°) JIC 45° Swept Elbow 74° cone Thrust Wire

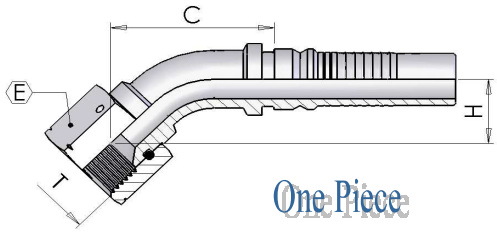

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1051-01	3/4	19	12	1.1/16-12	32	28	85
OL1051-02	3/4	19	12	1.3/16-12	36	31	85
OL1051-03	3/4	19	12	1.5/16-12	41	32	88
OL1051-04	1	25,4	16	1.5/16-12	41	36	113
OL1051-05	1.1/4	31,8	20	1.5/8-12	50	50	133
OL1051-06	1.1/2	38,1	24	1.7/8-12	55	49	165
OL1051-07	2	50,8	32	2.1/2-12	70	67	194

OL0512 Maschio Metrico svas. 24° Serie Pesante


(CES) Metric Male 24° Seat Heavy

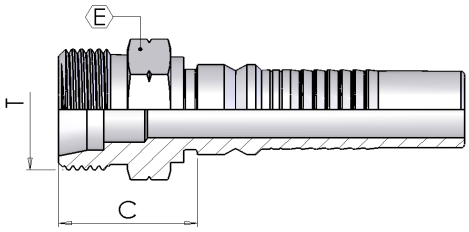

part number	hose I.D.		Dimension				
			dash	thread	*erm*	hex	cut-off
	in	mm	size	T		E	C
OL0512-01	1/2	12,7		M24-1,5		24	27
OL0512-02	5/8	15,9		M30-2		32	29
OL0512-03	3/4	19	12	M36-2	*25*	36	36
OL0512-04	1	25,4	16	M42-2	*30*	46	39
OL0512-05	1.1/4	31,8	20	M52-2	*38*	55	42

OL0413 Femmina Metrica cono 24° Serie Pesante

(DKOS) Metric Female 24° Seat Heavy

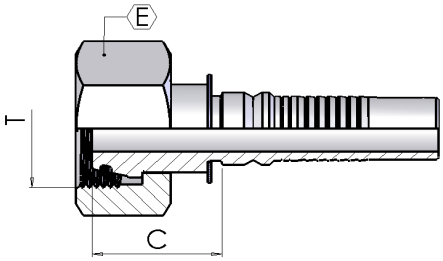


part number	hose I.D.		Dimension				
			dash	thread	*erm*	hex	cut-off
	in	mm	size	T		E	C
OL0413-01	3/4	19	12	M36-2	*25*	46	37
OL0413-02	1	25,4	16	M36-2	*25*	46	38
OL0413-03	1	25,4	16	M42-2	*30*	50	41
OL0413-04	1.1/4	31,8	20	M52-2	*38*	60	41
OL0413-05	1,1/2	38,1	24	M52-2	*38*	60	42

OL1441

(DKOS 90°)

Curva Metrica 90° cono 24° Serie Pesante

90° Metric Swept Elbow 24° Seat Heavy

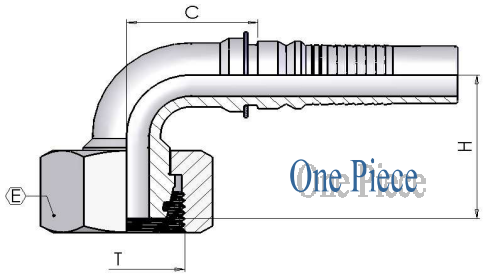


part number	hose I.D.		Dimension					
			dash	thread	*erm.*	hex	drop	cut-off
	in	mm	size	T		E	H	C
OL1441-01	3/4	19	12	M36-2	*25*	46	58	55
OL1441-02	1	25,4	16	M36-2	*25*	46	68	75
OL1441-03	1	25,4	16	M42-2	*30*	50	69	74
OL1441-04	1.1/4	31,8	20	M52-2	*38*	60	81	94

OL1091

(DKOS 45°)

Curva Metrica 45° cono 24° Serie Pesante


45° Metric Swept Elbow 24° Seat Heavy

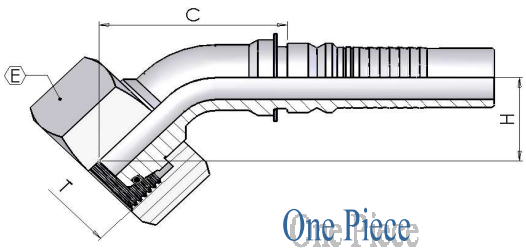

part number	hose I.D.		Dimension					
			dash	thread	*erm.*	hex	drop	cut-off
	in	mm	size	T		E	H	C
OL1091-01	3/4	19	12	M36-2	*25*	46	31	94
OL1091-02	1	25,4	16	M36-2	*25*	46	34	110
OL1091-03	1	25,4	16	M42-2	*30*	50	33	112
OL1091-04	1.1/4	31,8	20	M52-2	*38*	60	81	93

OL0432 Femmina ORFS

(ORFS) ORFS Female

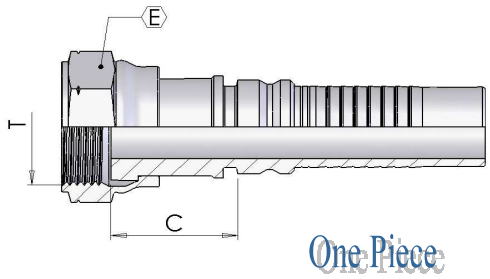


part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0432-01	3/4	19	12	1.3/16-12	36	33
OL0432-02	1	25,4	16	1.7/16-12	41	37
OL0432-03	1.1/4	31,8	20	1.11/16-12	50	37
OL0432-04	1.1/2	38,1	24	2-12	60	41

Dado Libero/slip on nut

OL0433 Femmina ORFS doppio esagono

(ORFS) ORFS Female Back Hexagon

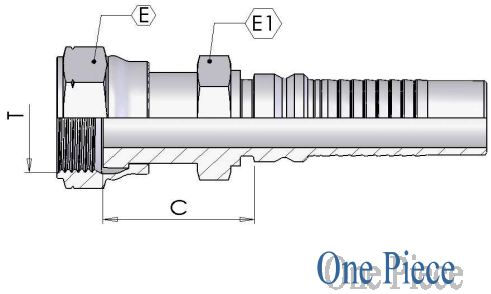


part number	hose I.D.		Dimension				
			dash	thread	hex		cut-off
	in	mm	size	T	E	E1	C
OL0433-01	3/4	19	12	1.3/16-12	36	30	39
OL0433-02	1	25,4	16	1.7/16-12	41	36	47
OL0433-03	1.1/4	31,8	20	1.11/16-12	50	46	50
OL0433-04	1.1/2	38,1	24	2-12	60	50	53

Inserto inter-lock / Inter-lock tail

OL0656 Curva ORFS 90°

(ORFS 90°) ORFS 90° Swept Elbow

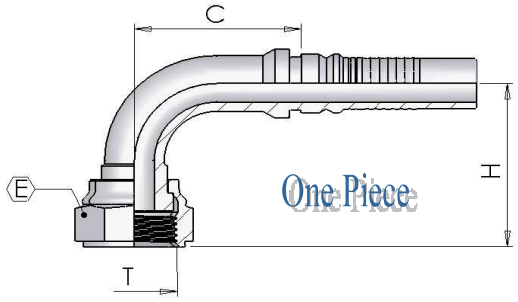


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0656-01	3/4	19	12	1.3/16-12	36	49	54
OL0656-02	1	25,4	16	1.7/16-12	41	66	69
OL0656-03	1.1/4	31,8	20	1.11/16-12	50	80	87
OL0656-04	1.1/2	38,1	24	2-12	60	102	111

Dado Libero/Slip on nut

OL0620 Curva ORFS 45°

(ORFS 45°) ORFS 45° Swept Elbow

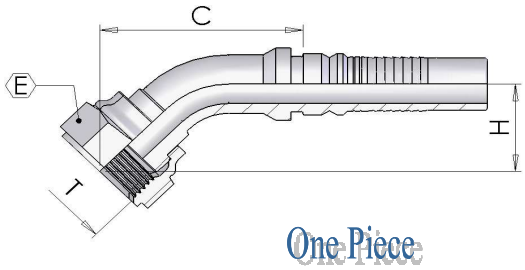


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0620-01	3/4	19	12	1.3/16-12	36	23	84
OL0620-02	1	25,4	16	1.7/16-12	41	33	107
OL0620-03	1.1/4	31,8	20	1.11/16-12	50	37	130
OL0620-04	1.1/2	38,1	24	2-12	60	50	165

Dado Libero/Slip on nut

OL0811 Maschio ORFS

(ORFS) ORFS Male

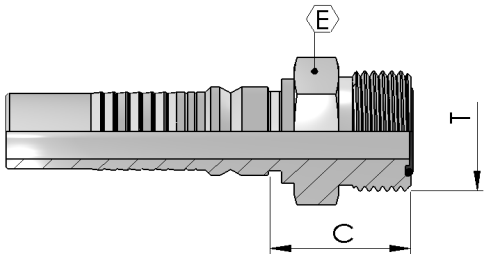


part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0811-01	3/4	19	12	1.3/16-12	32	34
OL0811-02	1	25,4	16	1.7/16-12	38	35
OL0811-03	1.1/4	31,8	20	1.11/16-12	46	36
OL0811-04	1.1/2	38,1	24	2-12	50	45

Inserto inter-lock / Inter-lock tail

OL1601 Flangia Diritta SAE 3000 PSI


(SFL) Straight SAE Flange 3000 PSI

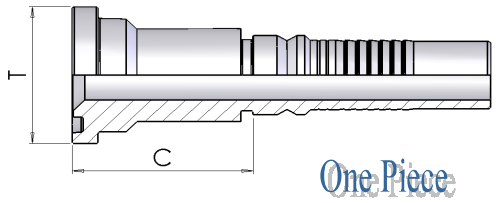

part number	hose I.D.		Dimension				
			dash	flange			cut-off
	in	mm	size	T	mm		C
OL1601-01	1/2	12,7		1/2			
OL1601-02	1/2	12,7		3/4			
OL1601-03	5/8	15,9		3/4			
OL1601-04	3/4	19	12	3/4	38.1		47
OL1601-05	3/4	19	12	1	44.5		50
OL1601-06	1	25,4	16	1	44.5		52
OL1601-07	1	25,4	16	1.1/4	50.8		55
OL1601-08	1.1/4	31,8	20	1.1/4	50.8		56
OL1601-09	1.1/4	31,8	20	1.1/2	60.3		59
OL1601-10	1.1/2	38,1	24	1.1/2	60.3		60
OL1601-11	1.1/2	38,1	24	2	71.4		65
OL1601-12	2	50,8	32	2	71.4		67
OL1601-13	2.1/2			2.1/2			
OL1601-14	3			3			

OL1602 Flangia 90°SAE 3000 PSI

(SFL 90°) 90°SAE Flange 3000 PSI

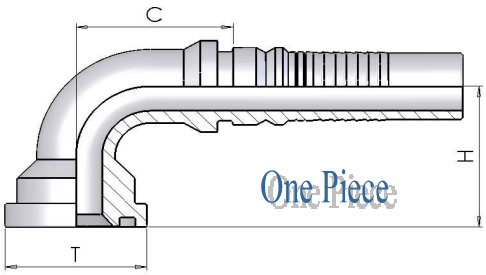


part number	hose I.D.		Dimension				
			dash	flange		drop	cut-off
	in	mm	size	T	mm	H	C
OL1602-01	1/2	12,7		1/2			
OL1602-02	1/2	12,7		3/4			
OL1602-03	5/8	15,9		3/4			
OL1602-04	3/4	19	12	3/4	38.1	52	52
OL1602-05	3/4	19	12	1	44.5	56	55
OL1602-06	1	25,4	16	1	44.5	65	73
OL1602-07	1	25,4	16	1.1/4	50.8	75	69
OL1602-08	1.1/4	31,8	20	1.1/4	50.8	78	93
OL1602-09	1.1/4	31,8	20	1.1/2	60.3	80	97
OL1602-10	1.1/2	38,1	24	1.1/2	60.3	95	100
OL1602-11	1.1/2	38,1	24	2	71.4	101	134
OL1602-12	2	50,8	32	2	71.4	121	122
OL1602-13	2.1/2			2.1/2			
OL1602-14	3			3			

Inserto inter-lock / Inter-lock tail

OL1501 Flangia 45° SAE 3000 PSI


(SFL 45) 45° SAE Flange 3000 PSI

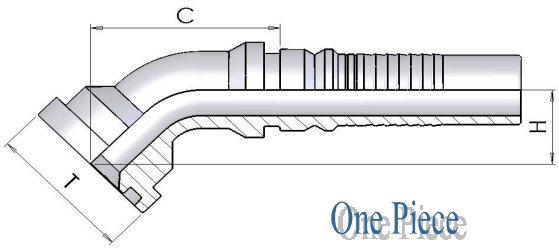

part number	hose I.D.		Dimension				
			dash	flange		drop	cut-off
	in	mm	size	T	mm	H	C
OL1501-01	1/2	12,7		1/2			
OL1501-02	1/2	12,7		3/4			
OL1501-03	5/8	15,9		3/4			
OL1501-04	3/4	19	12	3/4	38.1	25	81
OL1501-05	3/4	19	12	1	44.5	28	86
OL1501-06	1	25,4	16	1	44.5	35	107
OL1501-07	1	25,4	16	1.1/4	50.8	37	113
OL1501-08	1.1/4	31,8	20	1.1/4	50.8	37	136
OL1501-09	1.1/4	31,8	20	1.1/2	60.3	40	136
OL1501-10	1.1/2	38,1	24	1.1/2	60.3	44	159
OL1501-11	1.1/2	38,1	24	2	71.4	47	159
OL1501-12	2	50,8	32	2	71.4	56	182
OL1501-13	2.1/2			2.1/2			

OL1651 Flangia Diritta SAE 6000 PSI


(SFS) Straight SAE Flange 6000 PSI

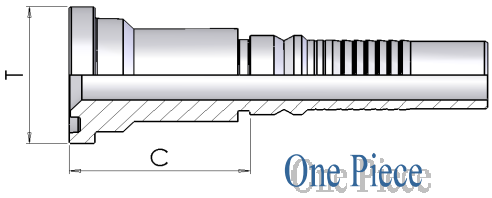

part number	hose I.D.		Dimension				
			dash	flange			cut-off
	in	mm	size	T	mm		C
OL1651-01	1/2	12,7		1/2			
OL1651-02	1/2	12,7		3/4			
OL1651-03	3/4	19	12	3/4	41.3		51
OL1651-04	3/4	19	12	1	47.6		57
OL1651-05	1	25,4	16	3/4	41.3		52
OL1651-06	1	25,4	16	1	47.6		59
OL1651-07	1	25,4	16	1.1/4	54		66
OL1651-08	1.1/4	31,8	20	1	47.6		60
OL1651-09	1.1/4	31,8	20	1.1/4	54		67
OL1651-10	1.1/4	31,8	20	1.1/2	63.5		73
OL1651-11	1.1/2	38,1	24	1.1/4	54		75
OL1651-12	1.1/2	38,1	24	1.1/2	63.5		74
OL1651-13	1.1/2	38,1	24	2	79.4		82
OL1651-14	2	50,8	32	2	79.4		84

OL1451 Flangia 90° SAE 6000 PSI


(SFS 90°) 90° SAE Flange 6000 PSI

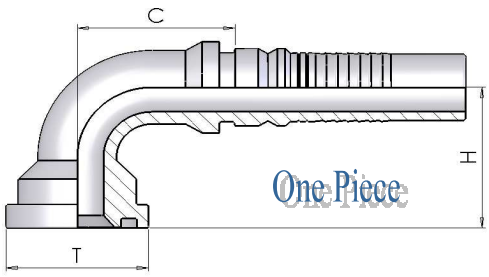

part number	hose I.D.		Dimension				
			dash	flange		drop	cut-off
	in	mm	size	T	mm	H	C
OL1451-01	1/2	12,7		1/2			
OL1451-02	1/2	12,7		3/4			
OL1451-03	5/8	15,9		3/4			
OL1451-04	3/4	19	12	3/4	41.3	55	53
OL1451-05	3/4	19	12	1	47.6	63	52
OL1451-06	1	25,4	16	3/4	41.3	66	73
OL1451-07	1	25,4	16	1	47.6	72	74
OL1451-08	1	25,4	16	1.1/4	54	79,5	73
OL1451-09	1.1/4	31,8	20	1	47.6	80	93
OL1451-10	1.1/4	31,8	20	1.1/4	54	84,5	93
OL1451-11	1.1/4	31,8	20	1.1/2	63.5	90	98
OL1451-12	1.1/2	38,1	24	1.1/2	63.5	101	114
OL1451-13	1.1/2	38,1	24	2	79.4	113	115
OL1451-14	2	50,8	32	2	79.4	138	124

OL1551 Flangia 45° SAE 6000 PSI

(SFS 45°) 45° SAE Flange 6000 PSI

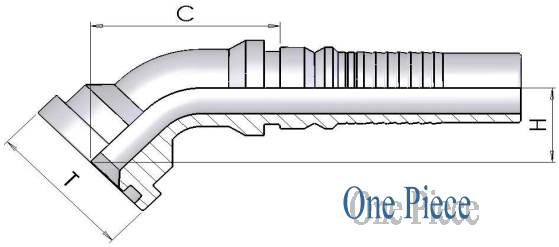


part number	hose I.D.		Dimension				
			dash	flange		drop	cut-off
	in	mm	size	T	mm	H	C
OL1551-01	1/2	12,7		1/2			
OL1551-02	1/2	12,7		3/4			
OL1551-03	5/8	15,9		3/4			
OL1551-04	3/4	19	12	3/4	41.3	28	85
OL1551-05	3/4	19	12	1	47.6	34	88
OL1551-06	1	25,4	16	3/4	41.3	35	107
OL1551-07	1	25,4	16	1	47.6	34	112
OL1551-08	1	25,4	16	1.1/4	54	40	117
OL1551-09	1.1/4	31,8	20	1	47.6	42	117
OL1551-10	1.1/4	31,8	20	1.1/4	54	43	139
OL1551-11	1.1/4	31,8	20	1.1/2	63.5	48	144
OL1551-12	1.1/2	38,1	24	1.1/2	63.5	50	167
OL1551-13	1.1/2	38,1	24	2	79.4	60	176
OL1551-14	2	50,8	32	2	79.4	67	200

Inserto inter-lock / Inter-lock tail

OL1643 Flangia Diritta SUPERCAT


(SFC) Straight 'CAT' Flange

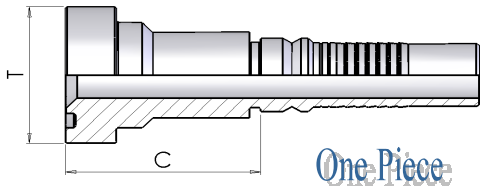

part number	hose I.D.		Dimension				
			dash	flange			cut-off
	in	mm	size	T	mm		C
OL1643-01	3/4	19	12	3/4	41.3		55
OL1643-02	3/4	19	12	1	47.6		62
OL1643-03	1	25,4	16	1	47.6		63
OL1643-04	1	25,4	16	1.1/4	54		70
OL1643-05	1.1/4	31,8	20	1.1/4	54		71
OL1643-06	1.1/4	31,8		1.1/2			
OL1643-07	1.1/2	38,1	24	1.1/2	64		78

OL1481 Flangia 90° SUPERCAT


(SFC 90°) 90°'CAT' Flange

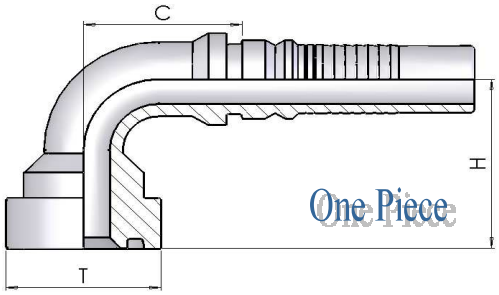

part number	hose I.D.		Dimension				
			dash	flange		drop	cut-off
	in	mm	size	T	mm	H	C
OL1481-01	3/4	19	12	3/4	41.3	62	51
OL1481-02	3/4	19		1			
OL1481-03	1	25,4	16	1	47.6	79	69
OL1481-04	1	25,4	16	1.1/4	54	82	74
OL1481-05	1.1/4	31,8	20	1.1/4	54	89	93
OL1481-06	1.1/4	31.8		1.1/2			
OL1481-07	1.1/2	38,1	24	1.1/2	63,5	100	115

OL1571 Flangia 45° SUPERCAT

(SFC 45°) 45°'CAT' Flange

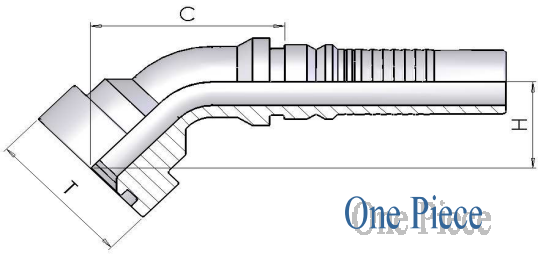

part number	hose I.D.		Dimension				
			dash	flange		drop	cut-off
	in	mm	size	T	mm	H	C
OL1571-01	3/4	19	12	3/4	41.3	30	89
OL1571-02	3/4	19		1			
OL1571-03	1	25,4	16	1	47.6	38	115
OL1571-04	1	25,4		1.1/4			
OL1571-05	1.1/4	31,8	20	1.1/4	54	47	142
OL1571-06	1.1/2	31.8		1.1/2			
OL1571-07	1.1/2	38,1	24	1.1/2	63,5	52	169