



















Inserto standard / Standard tail






Pagina / Page	19	19	20	20	21
Trecciato Braided					
	OL0000	**OL0050**	**OL0010**	**OL0150**	**OL0160**
	R1A - DIN 1ST	R2A - DIN 2ST (R9)	R1T - DIN 1SN (DIN 2TE)	1SC - 2SC - 1SN	R1AT / R2AT / 2SC / R16 DIN 1SN/2SN - (R17)

Pagina / Page	22	22	23
Compact Compatto			
	OL0020		
	1SC (R17)		
Thermo plastic			
		OL0200	
		R7 (R8 / R6)	
Tessile Textile			
			OL0100
			SAE 100 R3 SAE 100 R5 (O4 to 16)

Pagina / Page	23	23	24	24		24
Spiral					PTFE	
	OL0300	**OL0370**	**OL0250**	**OL0350**		**OL0210**
	Spiral No Skive	Spiral No Skive	R9 - DIN 4SP all DIN 4SH for 12 - 16	DIN 20023 4SH		Boccola per tubo PTFE Ferrule for PTFE hose

Pagina / Page	25		29	30	30	36
BSP 60		BSP 60 rolled nut				
	OL0500		**OL0400**	**OL0600**	**OL0700**	**OL0630**
	BSP MALE 60° seat		BSP FEMALE 60° R	90° Swept Elbow R	4 5° Swept Elbow R	90° K Swept Elbow R
	AGR		DKR	DKR-90°	DKR-45°	DKR-90°K

Pagina / Page	31	32	32	33	33	37
BSP 60 thrust wire nut						
	OL0401	**OL0601**	**OL0602**	**OL0603**	**OL0604**	**OL0631**
	BSP FEMALE 60° TW	90° Swept Elbow TW	90° Swept Elbow TW	45° Swept Elbow TW	45° Swept Elbow TW	90° K Swept E lbow TW
	DKR	DKR-90°	DKR-90°	DKR-45°	DKR-45°	DKR-90°K




Pagina / Page	34	34	34		28	28
BSP 60 loose back nut				BSP flat		
	OL0402	**OL0605**	**OL0606**		**OL0501**	**OL0407**
	BSP FEMALE 60° L	90° Swept Elbow L	45° Swept Elbow L		B SP MALE flat seat	BSP FEMALE flat seat
	DKR	DKR-90°	DKR-45°		AGR-F	DKR-F

Dimensions and general characteristics may be changed at any time without prior notice.


Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product
Any use of the product not in conformance with our instructions may be dangerous.

Inserto standard / Standard tail



BSP 60 rolled nut O'R

Pagina / Page	35	35	35
			
	OL0403	**OL0607**	**OL0608**
	BSP FEMALE 60° R	90° Swept Elbow R	45° Swept Elbow R
	DKR OR	DKR-90° OR	DKR-45° OR



BSPT Gas Con.

Pagina / Page	26
	
	OL0502
	BSPT MALE 60° seat
	AGR-K


NPTF

Pagina / Page	27	27
		
	OL0503	**OL0404**
	NPTF MALE 60° seat	NPSM FEMALE
	AGN	DKN



BSP fixed female

Pagina / Page	39	39
		
	OL0405	**OL0406**
	Dowty Seal	O'Ring Seal


BSP banjo

Pagina / Page	38
	
	OL0900
	JIC MALE 37°
	AGJ


BSP 60 compact forged

Pagina / Page	37	36
		
	OL0632	**OL0633**
	90° K Swept Elbow TW	90° K Swept Elbow R
	DKR-90° K	DKR-90° K





BSP swivel male

Pagina / Page	26
	
	OL0540
	60° seat - swivel
	AGR-RO







JIC 37

Pagina / Page	40
	
	OL0900
	JIC MALE 37°
	AGJ




JIC 37 rolled nut

Pagina / Page	42	44	46	46
				
	OL0960	**OL1000**	**OL1050**	**OL0961**
	JIC FEMALE 37° R	90° Swept Elbow R	45° Swept Elbow R	F EMALE 37° R back Hex
	DKJ	DKJ-90°	DKJ-45°	DKJ



JIC 37 thrust wire nut

Pagina / Page	41	43	43	45	45	47
						
	OL0950	**OL1005**	**OL1010**	**OL1055**	**OL1060**	**OL0634**
	JIC FEMALE 37° TW	90° Swept Elbow TW	90° Swept Elbow TW	45° Swept Elbow TW	45° Swept Elbow TW	90° K Swept E lbow TW
	DKJ	DKJ-90°	DKJ-90°	DKJ-45°	DKJ-45°	DKJ-90° K

JIC 37 loose back nut

Pagina / Page	48	48	48
			
	OL0970	**OL1015**	**OL1065**
	JIC FEMALE 37° L	90° Swept Elbow L	45° Swept Elbow L
	DKJ	DKJ-90°	DKJ-45°

JIC 37 compact forged




Pagina / Page	47	47
		
	OL0635	**OL0636**
	9 0° K Swept Elbow TW	90° K Swept Elbow R
	DKJ-90° K	DKJ-90° K

Dimensions and general characteristics may be changed at any time without prior notice.




Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product
Any use of the product not in conformance with our instructions may be dangerous.

Inserto standard / Standard tail





SAE Boss

Pagina / Page	49	49	49
			
	OL1610	**OL1630**	**OL1470**
	SAE MALE OR	SWIVEL MALE	90° SWIVEL MALE
	SAE-OR	**Boss**	**Boss-90°**


Inverted Flare

Pagina / Page	50	51	51
			
	OL1620	**OL1460**	**OL1560**
	Inverted Flare	Inverted Flare 90°	Inverted Flare 45°
	SIF	**SIF-90°**	**SIF-45°**




Metric 60

Pagina / Page	52	53	54	55
				
	OL0550	**OL0450**	**OL1020**	**OL1070**
	METRIC MALE 60°	FEMALE 60°	90° Swept Elbow	45° Swept Elbow
	AGM	**DKM**	**DKM-90°**	**DKM-45°**


Metric Din 24 CEL

Pagina / Page	56
	
	OL0850
	METRIC MALE 24°
	CEL




Metric Din 24 DKOL

Pagina / Page	58	60-61	62-63
			
	OL0408-OL0415	**OL1030/1/2**	**OL1080/1/2**
	FEMALE 24° OR	90° Swept Elbow OR	45° Swept Elbow OR
	DKOL	**DKOL-90°**	**DKOL-45°**




Metric Din 24 CES

Pagina / Page	57
	
	OL0800
	METRIC MALE 24°
	CES


Metric Din 24 DKOS

Pagina / Page	59	61	64
			
	OL0409	**OL1040**	**OL1090**
	FEMALE 24° OR	90° Swept Elbow OR	45° Swept Elbow OR
	DKOS	**DKOS-90°**	**DKOS-45°**

Metric Din 24 DKL

Pagina / Page	53	54	55
			
	OL0411	**OL0650**	**OL0750**
	FEMALE 24°	90° Swept Elbow	45° Swept Elbow
	DKL	**DKL 90°**	**DKL 45°**



























Metric banjo

Pagina / Page	65
	
	OL0805
	METRIC BANJO
	RNM

Dimensions and general characteristics may be changed at any time without prior notice.

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product
Any use of the product not in conformance with our instructions may be dangerous.
















Inserto standard / Standard tail

Pagina / Page	66	66	67	67		
French GAZ						
	OL0830	**OL0840**	**OL0410**	**OL0651**		
	French MALE GAZ	Standpipe GAZ	French FEMALE GAZ	90° Swept Elbow GAZ		
	CEF	BEF	DKF	DKF-90°		
Pagina / Page	68	69	70		71	71
Metric standpipe				Metric KAR		
	OL1100	**OL1200-OL1201**	**OL0612-OL0622**		**OL0420**	**OL0806**
	Metric Standpipe	Metric Standpipe 90°	Metric Standpipe 45°		SWIVEL FEMALE	Insert for gun
	BES-BEL	BES-BEL 90°	BES-BEL 45°		KAR	KAR
Pagina / Page	72			72		71
KOB Male			Male for Agric. Valves		Steko Male	
	OL0835			**OL0845**		**OL0815**
	KOB Metric Male			M18 for agric. valves		Staple Lock
	KOB			CGM		STN
Pagina / Page	74	74	75	76		73
ORFS crimped nut					ORFS	
	OL0430	**OL0431**	**OL0652**	**OL0613**		**OL0810**
	ORFS FEMALE	FEMALE back Hexagon	90° Swept Elbow	45° Swept Elbow		ORFS MALE
	ORFS	ORFS	ORFS 90°	ORFS 45°		ORFS
Pagina / Page	77	78	78			77
JIS "T"					JIS "N"	
	OL0440	**OL0653**	**OL0609**			**OL0441**
	JIS "T"	JIS "T"	JIS "T"			JIS "N"
	JIS-T	JIS-T 90°	JIS-T 45°			JIS-N
Pagina / Page	79	79	80	81	81	81
JIS "K"						
	OL0442	**OL0654**	**OL0610**	**OL0820**	**OL0655**	**OL0611**
	JIS "K"	JIS "K"	JIS "K"	"K"	"K" 90°	"K" 45°
	JIS-K	JIS-K 90°	JIS-K 45°	JIS-KF	JIS-KF 90°	JIS-KF 45°

Dimensions and general characteristics may be changed at any time without prior notice.

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product
Any use of the product not in conformance with our instructions may be dangerous.

Inserto standard / Standard tail

Pagina / Page	82	82	83	83	86
SAE 3000					SAE long drop 3000 
	OL1600	**OL1400**	**OL1500**	**OL1505**	**OL1401**
	3000 psi SOLID	3000 psi SOLID 90°	3000 psi SOLID 45°	3000 psi SOLID 22.5°30°60°67.5°	3000 psi SOLID 90°
	SFL	SFL 90°	SFL 45°		SFL 90°L
Pagina / Page	84	85	85		86
SAE 6000				SAE long drop 6000	
	OL1650	**OL1450**	**OL1550**		**OL1402**
	6000 psi SOLID	6000 psi SOLID 90°	6000 psi SOLID 45°		6 000 psi SOLID 90°
	SFS	SFS 90°	SFS 45°		SFS 90°L
Pagina / Page	87	87	87		88
CAT flange				Junction	
	OL1640	**OL1480**	**OL1570**		**OL1403**
	9000 psi SOLID	9000 psi SOLID 90°	9000 psi SOLID 45°		H OSE JUNCTION
	SFC	SFC 90°	SFC 45°		
Pagina / Page	88	89			
Various					
	OL1641	**OL1642**			
	Blank Insert	Weldable Fitting			


Dimensions and general characteristics may be changed at any time without prior notice.
Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product
Any use of the product not in conformance with our instructions may be dangerous.

Inserto standard / Standard tail

OL0000 Boccola a Pressare (skive)

Swaged Ferrule (skive)

per tubo / for hose:
R1A-1ST-2SC




part number	hose I.D.		Dimension			skive	
	in	mm	D	L	d	length	valid for
OL0000-01	3/16	4,8	17,5	27,0	10,5	20	R1A/1ST/2SC
OL0000-02	1/4	6,4	20,0	30,2	13,5	23	R1A/1ST/2SC
OL0000-03	5/16	7,9	22,0	30,7	14,4	23	R1A/1ST/2SC
OL0000-04	3/8	9,5	24,0	32,0	16,5	24	R1A/1ST/2SC
OL0000-05	1/2	12,7	28,5	34,0	20,5	25	R1A/1ST/2SC
OL0000-06	5/8	15,9	32,0	37,0	23,8	27	R1A/1ST/2SC
OL0000-07	3/4	19	36,0	43,0	27,6	31	R1A/1ST/2SC
OL0000-08	1	25,4	43,0	50,0	34,7	37	R1A/1ST/2SC
OL0000-09	1.1/4	31,8	52,0	57,0	42,4	46	R1A/1ST/2SC
OL0000-10	1.1/2	38,1	57,0	63,0	48,0	44	R1A/1ST/2SC
OL0000-11	2	50,8	70,6	78,0	61,2	60	R1A/1ST/2SC

OL0050 Boccola a Pressare (skive)

Swaged Ferrule (skive)

per tubo / for hose:
R2A - 2ST - R9




part number	hose I.D.		Dimension			skive	
	in	mm	D	L	d	length	valid for
OL0050-01	3/16	4,8	20,0	27,0	12,3	21	R2A/2ST
OL0050-02	1/4	6,4	21,0	30,0	14,1	22	R2A/2ST
OL0050-03	5/16	7,9	24,0	30,0	15,8	22	R2A/2ST
OL0050-04	3/8	9,5	25,4	32,0	18,0	24	R2A/2ST - R9
OL0050-05	1/2	12,7	30,0	34,0	22,0	25	R2A/2ST - R9
OL0050-06	5/8	15,9	34,0	37,0	25,9	27	R2A/2ST
OL0050-07	3/4	19	38,0	43,0	29,2	31	R2A/2ST - R9
OL0050-08	1	25,4	46,0	50,0	36,5	37	R2A/2ST - R9
OL0050-09	1.1/4	31,8	56,0	59,0	45,2	43	R2A/2ST
OL0050-10	1.1/2	38,1	62,0	63,0	51,9	45	R2A/2ST
OL0050-11	2	50,8	75,0	79,0	64,5	61	R2A/2ST
OL0050-12	2.1/2	63,5	95,0	83,7	82,3	63	R2A/2ST/2SC
OL0050-13	3	76,2	105,6	94,3	94,9	78	R2A/2ST/2SC

Inserto standard / Standard tail

OL0010 Boccola a Pressare (non skive)

Swaged Ferrule (no skive)

per tubo / for hose:
R1AT - 1SN

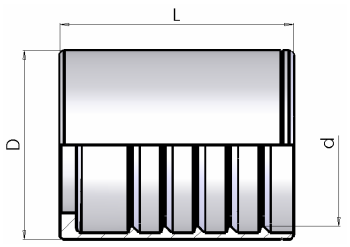


part number	hose I.D.		Dimension			skive	
	in	mm	D	L	d	length	valid for
OL0010-01	3/16	4,8	19,0	26,0	12,8	NO	R1AT/1SN
OL0010-02	1/4	6,4	20,0	30,5	14,3	NO	R1AT/1SN
OL0010-03	5/16	7,9	22,0	30,0	15,9	NO	R1AT/1SN
OL0010-04	3/8	9,5	24,0	31,5	18,3	NO	R1AT/1SN
OL0010-05	1	25,4	43,0	50,0	36,8	NO	R1AT/1SN
OL0010-06	1.1/4	31,8	53,0	59,0	45,0	NO	R1AT/1SN
OL0010-07	1.1/2	38,1	58,0	73,0	52,0	NO	R1AT/1SN
OL0010-08	2	50,8	73,0	77,0	65,5	NO	R1AT/1SN

OL0150 Boccola a Pressare (non skive)

Swaged Ferrule (no skive)

per tubo / for hose:
1SC - 2SC - 1SN

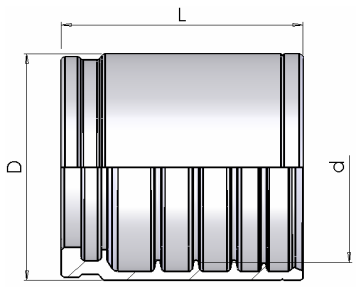


part number	hose I.D.		Dimension			skive	
	in	mm	D	L	d	length	valid for
OL0150-01	3/16	4,8	19	24	13,5	NO	R17 - Pilot (TFE0P10)
OL0150-02	1/4	6,4	20	26	14,3	NO	1SC - 2SC - 1SN
OL0150-03	5/16	7,9	22	26	16,1	NO	1SC - 2SC - 1SN
OL0150-04	3/8	9,5	24	26	18,4	NO	1SC - 2SC - 1SN
OL0150-05	1/2	12,7	28	28	21,7	NO	1SC - 2SC - 1SN
OL0150-06	5/8	15,9	32	29	25,0	NO	1SC - 2SC - 1SN
OL0150-07	3/4	19	35	35	28,7	NO	1SC - 2SC - 1SN
OL0150-08	1	25,4	44	44	36,7	NO	1SC - 2SC - 1SN
OL0150-09	1.1/4	31,8	54	56	45,4	NO	2SC - 1SN

OL0160 Boccola a Pressare (non skive)

Swaged Ferrule (no skive)

for hose / per tubo:
R1AT - 1SN - R2AT - 2SN - 2SC - R16 - R17 (2 Braids)




part number	hose I.D.		Dimension			skive	
	in	mm	D	L	d	length	valid for
OL0160-01	3/16	4,8	21,0	25,6	14,6	NO	R1AT/R2AT/2SC/R16
OL0160-02	1/4	6,4	22,0	28,0	15,8	NO	R1AT/R2AT/2SC/R16
OL0160-03	5/16	7,9	24,0	28,0	17,5	NO	R1AT/R2AT/2SC/R16
OL0160-04	3/8	9,5	26,5	28,0	20,0	NO	R1AT/R2AT/2SC/R16
OL0160-05	1/2	12,7	30,0	31,0	23,3	NO	R1AT/R2AT/2SC/R17/R16
OL0160-06	5/8	15,9	33,0	31,0	26,5	NO	R1AT/R2AT/2SC/R17/R16
OL0160-07	3/4	19	37,0	38,0	30,4	NO	R1AT/R2AT/2SC/R17/R16
OL0160-08	1	25,4	46,0	47,5	39,0	NO	R1AT/R2AT/2SC/R17/R16
OL0160-09	1.1/4	31,8	58,0	56,0	49,4	NO	R1AT/R2AT/2SC/R17/R16
OL0160-10	1.1/2	38,1	65,6	66,0	55,9	NO	R1AT/R2AT/2SC/R17/R16
OL0160-11	2	50,8	78,6	73,0	68,6	NO	R1AT/R2AT/2SC/R17/R16

Inserto standard / Standard tail

OL0020 Boccola a Pressare (non skive)

Swaged Ferrule (no skive)

per tubo / for hose:
1SC - R17 (1 braid)

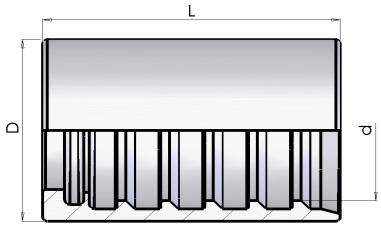


part number	hose I.D.		Dimension			skive	
	in	mm	D	L	d	length	valid for
OL0020-01	1/4	6,4	18,0	30,0	13,0	NO	1SC - R17
OL0020-02	5/16	7,9	20,0	30,5	15,0	NO	1SC - R17
OL0020-03	3/8	9,5	22,0	34,0	17,0	NO	1SC - R17
OL0020-04	1/2	12,7	25,5	34,0	19,9	NO	1SC
OL0020-05	5/8	15,9	28,0	37,0	23,0	NO	1SC
OL0020-06	3/4	19	32,0	42,5	26,4	NO	1SC

OL0200 Boccola a Pressare (non skive)

Swaged Ferrule (no skive)

per tubo / for hose:
R7 - R8 - R6 - 1TE




part number	hose I.D.		Dimension			skive	
	in	mm	D	L	d	length	valid for
OL0200-01	3/16	4,8	14,0	27,0	10,6	NO	R7-R8-1TE
OL0200-02	1/4	6,4	17,0	29,0	13,5	NO	R6-R7-R8-1TE
OL0200-03	5/16	7,9	19,0	30,0	15,2	NO	R6-R7-R8-1TE
OL0200-04	3/8	9,5	21,0	31,0	16,8	NO	R6-R7-R8-1TE
OL0200-05	1/2	12,7	25,4	34,0	20,8	NO	R6-R7-R8-1TE
OL0200-06	5/8	15,9	28,5	36,0	24,0	NO	R6-R7-R8-1TE
OL0200-07	3/4	19	32,0	36,0	27,8	NO	R7-R8-1TE
OL0200-08	1	25,4	40,0	50,0	34,5	NO	R7-R8-1TE

chiedere per diametri di pressatura tubo R8 / ask for R8 swaging diameters

OL0100 Boccola a Pressare (non skive)

Swaged Ferrule (no skive)

per tubo / for hose:
R3




part number	hose I.D.		Dimension			skive	
	in	mm	D	L	d	length	valid for
OL0100-01	3/16	4,8	14,0	27,0	10,6	NO	R3
OL0100-02	1/4	6,4	19,0	29,0	15,2	NO	R3
OL0100-03	5/16	7,9	22,0	30,0	18,4	NO	R3
OL0100-04	3/8	9,5	24,0	31,0	19,9	NO	R3
OL0100-05	1/2	12,7	28,5	34,0	24,7	NO	R3
OL0100-06	5/8	15,9	32,0	36,0	27,9	NO	R3
OL0100-07	3/4	19	38,0	42,0	32,6	NO	R3
OL0100-08	1	25,4	46,0	50,0	39,5	NO	R3
OL0100-09	1.1/4	31,8	52,0	57,0	46,0	NO	R3

OL0300
OL0370 Boccola a Pressare (non skive)

Swaged Ferrule (no skive)

per tubo / for hose:
4SP - 4SH - R9 - R12 - R13 - R15




part number	hose I.D.		Dimension			skive	
	in	mm	D	L	d	length	valid for
OL0300-01	1	25,4	53,5	56,0	41,0	NO	4SP-4SH-R9-R12-R13-R15
OL0300-02	1.1/4	31,8	62,0	62,0	48,6	NO	4SH - R15 (4spiral)
OL0370-01	1.1/4	31,8	66,0	62,0	52,6	NO	4SP-R9-R12-R13-R15(6 spiral)
OL0370-02	1.1/2	38,1	73,3	70,0	59,8	NO	4SP-R9-R12-R13-R15(6 spiral)

Inserto standard / Standard tail

OL0250 Boccola a Pressare (skive)

Swaged Ferrule (skive)

per tubo / for hose:
R9 - 4SP - 4SH - R12




part number	hose I.D.		Dimension			skive	
	in	mm	D	L	d	length	valid for
OL0250-01	1/4	6,4	21,0	30,0	15,3	22	R9 - 4SP - R12
OL0250-02	3/8	9,5	25,4	33,5	18,3	26	R9 - 4SP - R12
OL0250-03	1/2	12,7	30,0	36,0	22,0	28	R9 - 4SP - R12
OL0250-04	5/8	15,9	34,0	40,0	25,7	31	R9 - 4SP - R12
OL0250-05	3/4	19	38,0	43,0	29,4	34	R9 - 4SP - 4SH - R12
OL0250-06	1	25,4	46,0	60,0	36,1	48	R9 - 4SP - 4SH - R12
OL0250-07	1.1/4	31,8	56,0	66,0	46,7	54	R9 - 4SP - R12
OL0250-08	1.1/2	38,1	67,0	76,5	55,7	62	R9 - 4SP - R12
OL0250-09	2	50,8	80,0	79,8	68,8	64	R9 - 4SP - R12

OL0350 Boccola a Pressare (skive)

Swaged Ferrule (skive)

per tubo / for hose:
4SH




part number	hose I.D.		Dimension			skive	
	in	mm	D	L	d	length	valid for
OL0350-01	1.1/4	31,8	52,0	66,0	43,0	54	DIN 4SH
OL0350-02	1.1/2	38,1	62,0	76,5	50,4	62	DIN 4SH
OL0350-03	2	50,8	75,0	79,8	65,5	64	DIN 4SH

OL0210 Boccola per tubo PTFE

Ferrule for PTFE hose


per tubo / for hose:
PTFE type **TP1** (with std fittings)



part number	hose I.D.		Dimension			skive	
	in	mm	D	L	d	length	valid for
OL0210-01	3/16	4,8	12,7	22	9,5	No	PTFE type TP1
OL0210-02	1/4	6,4	14,4	23,9	11,1	No	PTFE type TP1
OL0210-03	5/16	7,9	17,1	24,6	13,0	No	PTFE type TP1
OL0210-04	3/8	9,5	19,0	27,4	15,0	No	PTFE type TP1
OL0210-05	1/2	12,7	22,4	28,7	18,3	No	PTFE type TP1
OL0210-06	5/8	15,9	27,0	31,7	23,1	No	PTFE type TP1
OL0210-07	3/4	19	28,7	34,5	24,8	No	PTFE type TP1
OL0210-08	1	25,4	38,1	43,6	34,3	No	PTFE type TP1

OL0500 Maschio BSP svas. 60°

(AGR) BSP Male Parallel 60° cone

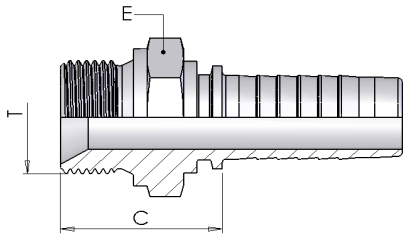


part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0500-01	3/16	4,8	03	1/8-28	14	21
OL0500-02	3/16	4,8	03	1/4-19	19	26
OL0500-03	1/4	6,4	04	1/8-28	14	21
OL0500-04	1/4	6,4	04	1/4-19	19	27
OL0500-05	1/4	6,4	04	3/8-19	22	28
OL0500-06	1/4	6,4	04	1/2-14	27	35
OL0500-07	5/16	7,9	05	1/4-19	19	27
OL0500-08	5/16	7,9	05	3/8-19	22	28
OL0500-09	5/16	7,9	05	1/2-14	27	32
OL0500-10	3/8	9,5	06	1/4-19	19	27
OL0500-11	3/8	9,5	06	3/8-19	22	29
OL0500-12	3/8	9,5	06	1/2-14	27	32
OL0500-13	1/2	12,7	08	3/8-19	22	29
OL0500-14	1/2	12,7	08	1/2-14	27	33
OL0500-15	1/2	12,7	08	5/8-14	30	34
OL0500-16	1/2	12,7	08	3/4-14	32	35
OL0500-17	5/8	15,9	10	1/2-14	27	33
OL0500-18	5/8	15,9	10	5/8-14	30	35
OL0500-19	5/8	15,9	10	3/4-14	32	35
OL0500-20	3/4	19	12	3/4-14	32	36
OL0500-21	3/4	19	12	1-11	41	39
OL0500-22	1	25,4	16	1-11	41	40
OL0500-23	1	25,4	16	1.1/4-11	50	44
OL0500-24	1.1/4	31,8	20	1-11	41	41
OL0500-25	1.1/4	31,8	20	1.1/4-11	50	45
OL0500-26	1.1/4	31,8	20	1.1/2-11	55	46
OL0500-27	1.1/2	38,1	24	1.1/2-11	55	46
OL0500-28	1.1/2	38,1	24	2-11	70	54
OL0500-29	2	50,8	32	1.1/2-11	65	50
OL0500-30	2	50,8	32	2-11	70	54

Inserto standard / Standard tail

OL0540 Maschio BSP Svas.60°- girevole


(AGR-RO) BSP Male Parallel 60°Cone - Swivel

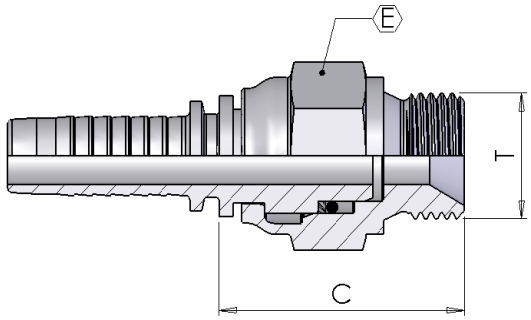

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0540-01	1/4	6,4	04	1/4-19	19	37
OL0540-02	5/16	7,9	05	1/2-14	27	44
OL0540-03	3/8	9,5	06	3/8-19	22	43
OL0540-04	1/2	12,7	08	1/2-14	27	47
OL0540-05	3/4	19	12	3/4-14	32	54
OL0540-06	1	25,4	16	1-11	41	59
OL0540-07	1.1/4	31,8	20	1.1/4-11	50	63
OL0540-08	1.1/2	38,1	24	1.1/2-11	55	67
OL0540-09	2	50,8	32	2-11	65	72

OL0502 Maschio BSPT svas. 60°

(AGR-K) BSP Taper Male 60°cone

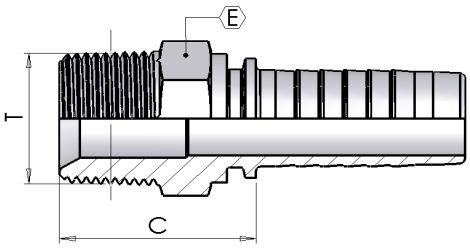


part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0502-01	3/16	4,8	03	1/8-28	12	21
OL0502-02	3/16	4,8	03	1/4-19	15	27
OL0502-03	1/4	6,4	04	1/8-28	12	22
OL0502-04	1/4	6,4	04	1/4-19	15	28
OL0502-05	1/4	6,4	04	3/8-19	19	28
OL0502-06	5/16	7,9	05	1/4-19	15	28
OL0502-07	5/16	7,9	05	3/8-19	19	28
OL0502-08	3/8	9,5	06	1/4-19	17	28
OL0502-09	3/8	9,5	06	3/8-19	19	28
OL0502-10	3/8	9,5	06	1/2-14	22	33
OL0502-11	1/2	12,7	08	3/8-19	19	29
OL0502-12	1/2	12,7	08	1/2-14	22	34
OL0502-13	1/2	12,7	08	3/4-14	27	36
OL0502-14	5/8	15,9	10	1/2-14	22	34
OL0502-15	5/8	15,9	10	5/8-14	24	35
OL0502-16	5/8	15,9	10	3/4-14	27	36
OL0502-17	3/4	19	12	3/4-14	27	37
OL0502-18	3/4	19	12	1-11	36	43
OL0502-19	1	25,4	16	1-11	36	44
OL0502-20	1	25,4	16	1.1/4-11	46	46
OL0502-21	1.1/4	31,8	20	1.1/4-11	46	47
OL0502-22	1.1/4	31,8	20	1.1/2-11	50	49
OL0502-23	1.1/2	38,1	24	1.1/2-11	50	49
OL0502-24	1.1/2	38,1	24	2-11	65	55
OL0502-25	2	50,8	32	2-11	65	55

Inserto standard / Standard tail

OL0503 Maschio NPTF svas. 60°


(AGN) NPTF Male 60° cone

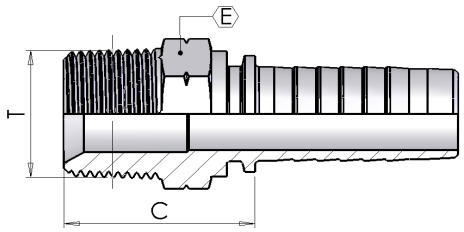

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0503-01	3/16	4,8	03	1/8-27	12	22
OL0503-02	3/16	4,8	03	1/4-18	15	27
OL0503-03	1/4	6,4	04	1/8-27	12	22
OL0503-04	1/4	6,4	04	1/4-18	15	28
OL0503-05	1/4	6,4	04	3/8-18	19	28
OL0503-06	5/16	7,9	05	1/4-18	15	28
OL0503-07	5/16	7,9	05	3/8-18	19	28
OL0503-08	5/16	7,9	05	1/2-14	22	34
OL0503-09	3/8	9,5	06	1/4-18	17	28
OL0503-10	3/8	9,5	06	3/8-18	19	28
OL0503-11	3/8	9,5	06	1/2-14	22	34
OL0503-12	1/2	12,7	08	3/8-18	19	29
OL0503-13	1/2	12,7	08	1/2-14	22	35
OL0503-14	1/2	12,7	08	3/4-14	27	36
OL0503-15	5/8	15,9	10	1/2-14	24	35
OL0503-16	5/8	15,9	10	3/4-14	27	36
OL0503-17	3/4	19	12	1/2-14	24	36
OL0503-18	3/4	19	12	3/4-14	27	37
OL0503-19	3/4	19	12	1-11.1/2	36	43
OL0503-20	1	25,4	16	1-11.1/2	36	44
OL0503-21	1	25,4	16	1.1/4-11.1/2	46	46
OL0503-22	1.1/4	31,8	20	1-11.1/2	41	45
OL0503-23	1.1/4	31,8	20	1.1/4-11.1/2	46	47
OL0503-24	1.1/2	38,1	24	1.1/2-11.1/2	50	49
OL0503-25	2	50,8	32	2-11.1/2	65	55
OL0503-26	2.1/2	63,5	40	2.1/2-8	80	55
OL0503-27	3	76,2	48	3-8	90	58

OL0404 Femmina NPSM cono 60° dado rullato

(DKN) NPSM Female 60° Cone Rolled Nut

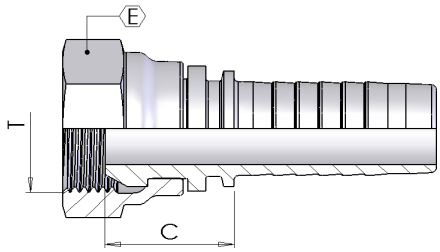


part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0404-01	3/16	4,8	03	1/4-18	19	17
OL0404-02	1/4	6,4	04	1/4-18	19	17
OL0404-03	3/8	9,5	06	3/8-18	22	19
OL0404-04	1/2	12,7	08	1/2-14	27	23

Inserto standard / Standard tail

OL0501 Maschio BSP - Sede Piana


(AGR-F) BSP Male - Flat Seat

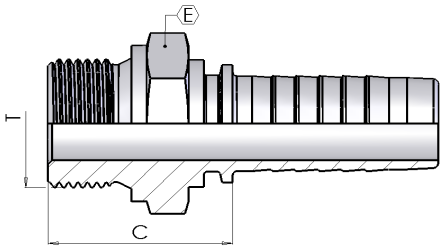

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0501-01	3/16	4,8	03	1/8-28	14	21
OL0501-02	1/4	6,4	04	1/4-19	19	27
OL0501-03	1/4	6,4	04	3/8-19	22	28
OL0501-04	5/16	7,9	05	3/8-19	22	28
OL0501-05	3/8	9,5	06	3/8-19	22	29
OL0501-06	3/8	9,5	06	1/2-14	27	32
OL0501-07	1/2	12,7	08	1/2-14	27	33
OL0501-08	1/2	12,7	08	5/8-14	30	35
OL0501-09	1/2	12,7	08	3/4-14	32	35
OL0501-10	5/8	15,9	10	5/8-14	30	35
OL0501-11	5/8	15,9	10	3/4-14	32	35
OL0501-12	3/4	19	12	3/4-14	32	36
OL0501-13	3/4	19	12	1-11	41	39
OL0501-14	1	25,4	16	1-11	41	40

OL0407 Femmina BSP Sede Piana


(DKR-F) BSP Female Flat Seat

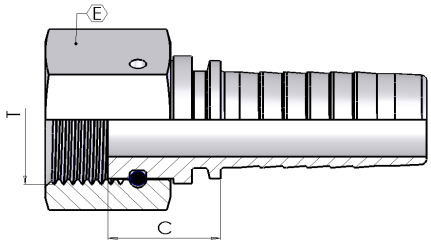

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0407-01	1/4	6,4	04	1/4-19	19	14
OL0407-02	1/4	6,4	04	3/8-19	22	15
OL0407-03	5/16	7,9	05	1/4-19	19	14
OL0407-04	5/16	7,9	05	3/8-19	22	15
OL0407-05	5/16	7,9	05	1/2-14	27	17
OL0407-06	3/8	9,5	06	3/8-19	22	15
OL0407-07	3/8	9,5	06	1/2-14	27	16
OL0407-08	1/2	12,7	08	1/2-14	27	16
OL0407-09	1/2	12,7	08	5/8-14	30	16
OL0407-10	1/2	12,7	08	3/4-14	32	23
OL0407-11	5/8	15,9	10	5/8-14	30	16
OL0407-12	5/8	15,9	10	3/4-14	32	20
OL0407-13	3/4	19	12	3/4-14	32	21
OL0407-14	3/4	19	12	1-11	38	23
OL0407-15	1	25,4	16	1-11	38	22
OL0407-16	1.1/2	38,1	24	1.1/2-11	55	27

OL0400 Femmina BSP cono 60° Dado Rullato

(DKR) BSP Female 60° Cone Rolled Nut

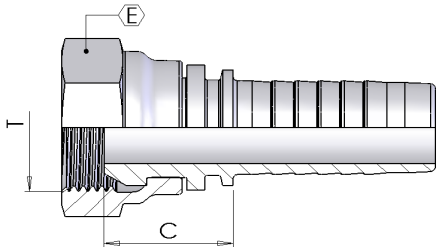


part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0400-01	3/16	4,8	03	1/8-28	14	15
OL0400-02	3/16	4,8	03	1/4-19	19	17
OL0400-03	1/4	6,4	04	1/8-28	14	15
OL0400-04	1/4	6,4	04	1/4-19	19	17
OL0400-05	1/4	6,4	04	3/8-19	22	19
OL0400-06	1/4	6,4	04	1/2-14	27	22
OL0400-07	5/16	7,9	05	1/4-19	19	17
OL0400-08	5/16	7,9	05	3/8-19	22	19
OL0400-09	5/16	7,9	05	1/2-14	27	22
OL0400-10	3/8	9,5	06	1/4-19	19	17
OL0400-11	3/8	9,5	06	3/8-19	22	19
OL0400-12	3/8	9,5	06	1/2-14	27	22
OL0400-13	1/2	12,7	08	3/8-19	22	20
OL0400-14	1/2	12,7	08	1/2-14	27	23
OL0400-15	1/2	12,7	08	5/8-14	30	20
OL0400-16	1/2	12,7	08	3/4-14	32	27
OL0400-17	5/8	15,9	10	1/2-14	27	23
OL0400-18	5/8	15,9	10	5/8-14	30	20
OL0400-19	5/8	15,9	10	3/4-14	32	25
OL0400-20	3/4	19	12	3/4-14	32	25
OL0400-21	3/4	19	12	1-11	38	26
OL0400-22	1	25,4	16	1-11	38	27

Inserto standard / Standard tail

OL0600 Curva BSP 90° cono 60° Dado Rullato


(DKR 90°) BSP 90° Swept Elbow 60° Cone Rolled Nut

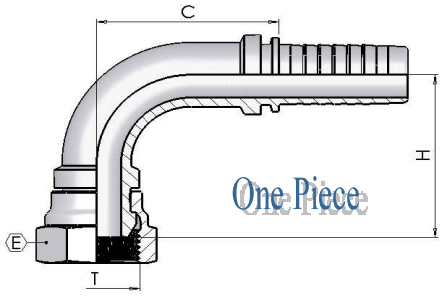

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0600-01	3/16	4,8	03	1/8-28	14	23	22
OL0600-02	3/16	4,8	03	1/4-19	19	25	22
OL0600-03	1/4	6,4	04	1/8-28	14	25	25
OL0600-04	1/4	6,4	04	1/4-19	19	27	25
OL0600-05	1/4	6,4	04	3/8-19	22	31	25
OL0600-06	5/16	7,9	05	3/8-19	22	36	29
OL0600-07	3/8	9,5	06	3/8-19	22	35	33
OL0600-08	3/8	9,5	06	1/2-14	27	40	31
OL0600-09	1/2	12,7	08	1/2-14	27	41	39
OL0600-10	1/2	12,7	08	5/8-14	30	41	41
OL0600-11	1/2	12,7	08	3/4-14	32	46	41
OL0600-12	5/8	15,9	10	5/8-14	30	43	43
OL0600-13	5/8	15,9	10	3/4-14	32	50	45
OL0600-14	3/4	19	12	3/4-14	32	57	56
OL0600-15	3/4	19	12	1-11	38	60	56
OL0600-16	1	25,4	16	1-11	38	67	70

OL0700 Curva BSP 45° cono 60° Dado Rullato


(DKR 45°) BSP 45° Swept Elbow 60° Cone Rolled Nut

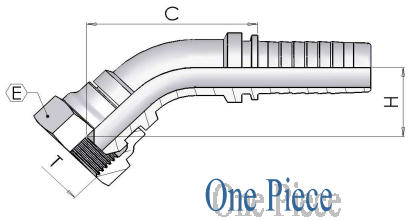


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0700-01	3/16	4,8	03	1/8-28	14	15	33
OL0700-02	3/16	4,8	03	1/4-19	19	15	35
OL0700-03	1/4	6,4	04	1/8-28	14	14	40
OL0700-04	1/4	6,4	04	1/4-19	19	15	41
OL0700-05	1/4	6,4	04	3/8-19	22	18	44
OL0700-06	5/16	7,9	05	3/8-19	22	19	51
OL0700-07	3/8	9,5	06	3/8-19	22	19	52
OL0700-08	3/8	9,5	06	1/2-14	27	21	55
OL0700-09	1/2	12,7	08	1/2-14	27	24	65
OL0700-10	1/2	12,7	08	5/8-14	30	21	96
OL0700-11	1/2	12,7	08	3/4-14	32	25	70
OL0700-12	5/8	15,9	10	5/8-14	30	23	68
OL0700-13	5/8	15,9	10	3/4-14	32	27	72
OL0700-14	3/4	19,0	12	3/4-14	32	30	86
OL0700-15	3/4	19,0	12	1-11	38	32	88
OL0700-16	1	25,4	16	1-11	38	35	107

OL0401 Femmina BSP cono 60°Dado Spinato

(DKR) BSP Female 60° cone Thrust Wire

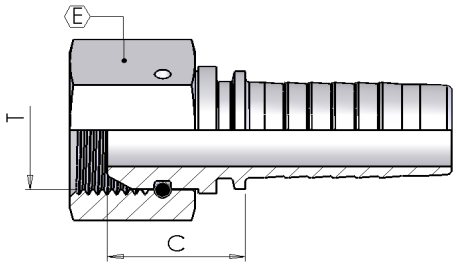





(*) - Femmina BSP con O-Ring
(*) - BSP female with O-Ring

	part number	hose I.D.		Dimension			
				dash	thread	hex	cut-off
		in	mm	size	T	E	C
	OL0401-01	3/16	4,8	03	1/8-28	14	15
	OL0401-02	3/16	4,8	03	1/4-19	19	17
	OL0401-03	1/4	6,4	04	1/8-28	14	15
	OL0401-04	1/4	6,4	04	1/4-19	19	17
	OL0401-05	1/4	6,4	04	3/8-19	22	19
	OL0401-06	1/4	6,4	04	1/2-14	27	22
	OL0401-07	5/16	7,9	05	1/4-19	19	17
	OL0401-08	5/16	7,9	05	3/8-19	22	19
	OL0401-09	3/8	9,5	06	1/4-19	19	17
	OL0401-10	3/8	9,5	06	3/8-19	22	19
	OL0401-11	3/8	9,5	06	1/2-14	27	22
	OL0401-12	1/2	12,7	08	3/8-19	22	20
	OL0401-13	1/2	12,7	08	1/2-14	27	23
	OL0401-14	1/2	12,7	08	5/8-14	30	20
	OL0401-15	1/2	12,7	08	3/4-14	32	27
	OL0401-16	5/8	15,9	10	5/8-14	30	20
	OL0401-17	5/8	15,9	10	3/4-14	32	25
	OL0401-18	3/4	19	12	1/2-14	27	24
	OL0401-19	3/4	19	12	3/4-14	32	25
(*)	**OL0401-20**	3/4	19	12	1-11	38	26
	OL0401-21	1	25,4	16	3/4-14	32	27
(*)	**OL0401-22**	1	25,4	16	1-11	38	27
(*)	**OL0401-23**	1	25,4	16	1.1/4-11	50	30
(*)	**OL0401-24**	1.1/4	31,8	20	1.1/4-11	50	32
	OL0401-25	1.1/4	31,8	20	1.1/4-11	50	32
(*)	**OL0401-26**	1.1/4	31,8	20	1.1/2-11	55	34
(*)	**OL0401-27**	1.1/2	38,1	24	1.1/2-11	55	34
	OL0401-28	1.1/2	38,1	24	1.1/2-11	55	34
(*)	**OL0401-29**	1.1/2	38,1	24	2-11	70	34
(*)	**OL0401-30**	2	50,8	32	2-11	70	31
	OL0401-31	2	50,8	32	2-11	70	31
	OL0401-32	2.1/2	63,5	40	2.1/2-11	85	41
	OL0401-33	3	76,2	48	3-11	100	45

OL0601 Curva BSP 90°cono 60°Dado Spinato

(DKR 90°) BSP 90° Swept Elbow 60° cone Thrust Wire

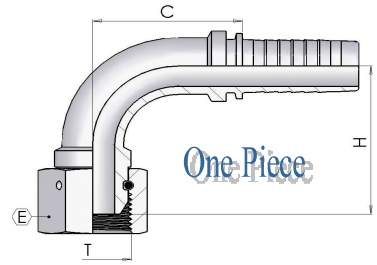





(*) - Femmina BSP con O-Ring
(*) - BSP female with O-Ring

	part number	hose I.D.		Dimension				
				dash	thread	hex	drop	cut-off
		in	mm	size	T	E	H	C
	OL0601-01	3/16	4,8	03	1/8-28	14	23	22
	OL0601-02	3/16	4,8	03	1/4-19	19	25	22
	OL0601-03	1/4	6,4	04	1/8-28	14	25	25
	OL0601-04	1/4	6,4	04	1/4-19	19	27	25
	OL0601-05	1/4	6,4	04	3/8-19	22	31	25
	OL0601-06	5/16	7,9	05	1/4-19	19	31	31
	OL0601-07	5/16	7,9	05	3/8-19	22	36	29
	OL0601-08	3/8	9,5	06	1/4-19	19	33	31
	OL0601-09	3/8	9,5	06	3/8-19	22	35	33
	OL0601-10	3/8	9,5	06	1/2-14	27	40	31
	OL0601-11	1/2	12,7	08	3/8-19	22	42	39
	OL0601-12	1/2	12,7	08	1/2-14	27	41	39
	OL0601-13	1/2	12,7	08	5/8-14	30	42	39
	OL0601-14	1/2	12,7	08	3/4-14	32	46	41
	OL0601-15	5/8	15,9	10	5/8-14	30	43	43
	OL0601-16	5/8	15,9	10	3/4-14	32	50	45
	OL0601-17	3/4	19	12	3/4-14	32	57	56
(*)	OL0601-18	3/4	19	12	1-11	38	60	56
(*)	OL0601-19	1	25,4	16	1-11	38	67	70
(*)	OL0601-20	1	31,8	20	1.1/4-11	50	81	86
	OL0601-21	1.1/4	31,8	20	1.1/4-11	50	81	86
(*)	OL0601-22	1.1/4	38,1	24	1.1/2-11	55	95	103
	OL0601-23	1.1/2	38,1	24	1.1/2-11	55	95	103
(*)	OL0601-24	1.1/2	50,8	32	2-11	70	135	122
	OL0601-25	2	50,8	32	2-11	70	135	122

OL0602 Curva BSP 90°cono 60°Dado Spinato (saldata)

(DKR 90°) BSP 90° Swept Elbow 60° cone Thrust Wire (welded)

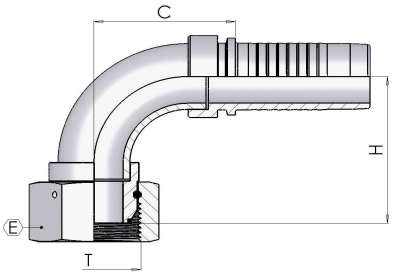




(*) - Femmina BSP con O-Ring
(*) - BSP female with O-Ring

	part number	hose I.D.		Dimension				
				dash	thread	hex	drop	cut-off
		in	mm	size	T	E	H	C
(*)	OL0602-01	1.1/4	31,8	20	1.1/4-11	50	72	63
(*)	OL0602-02	1.1/4	31,8	20	1.1/2-11	55	89	81
(*)	OL0602-03	1.1/2	38,1	24	1.1/2-11	55	89	80
(*)	OL0602-04	1.1/2	38,1	24	2-11	70	113	102
(*)	OL0602-05	2	50,8	32	2-11	70	113	103

OL0603 Curva BSP 45°cono 60°Dado Spinato

(DKR 45°) BSP 45° Swept Elbow 60° cone Thrust Wire

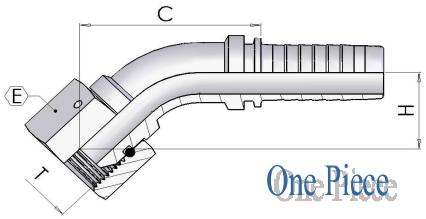




(*) - Femmina BSP con O-Ring
(*) - BSP female with O-Ring

O-Ring

	part number	hose I.D.		Dimension				
				dash	thread	hex	drop	cut-off
		in	mm	size	T	E	H	C
	OL0603-01	3/16	4,8	03	1/8-28	14	15	33
	OL0603-02	3/16	4,8	03	1/4-19	19	15	35
	OL0603-03	1/4	6,4	04	1/8-28	14	14	40
	OL0603-04	1/4	6,4	04	1/4-19	19	15	41
	OL0603-05	1/4	6,4	04	3/8-19	22	18	44
	OL0603-06	5/16	7,9	05	1/4-19	19	18	47
	OL0603-07	5/16	7,9	05	3/8-19	22	19	51
	OL0603-08	3/8	9,5	06	1/4-19	19	16	50
	OL0603-09	3/8	9,5	06	3/8-19	22	19	52
	OL0603-10	3/8	9,5	06	1/2-14	27	21	55
	OL0603-11	1/2	12,7	08	3/8-19	22	22	63
	OL0603-12	1/2	12,7	08	1/2-14	27	24	65
	OL0603-13	1/2	12,7	08	5/8-14	30	21	64
	OL0603-14	1/2	12,7	08	3/4-14	32	25	70
	OL0603-15	5/8	15,9	10	5/8-14	30	23	68
	OL0603-16	5/8	15,9	10	3/4-14	32	27	72
	OL0603-17	3/4	19	12	3/4-14	32	30	86
(*)	OL0603-18	3/4	19	12	1-11	38	32	88
(*)	OL0603-19	1	25,4	16	1-11	38	35	107
(*)	OL0603-20	1.1/4	31,8	20	1.1/4-11	50	40	107
(*)	OL0603-21	1.1/2	38,1	24	1.1/2-11	55	47	117
(*)	OL0603-22	2	50,8	32	2-11	70	65	142

OL0604 Curva BSP 45°cono 60°Dado Spinato (saldata)

(DKR 45°) BSP 45° Swept Elbow 60° cone Thrust Wire (welded)

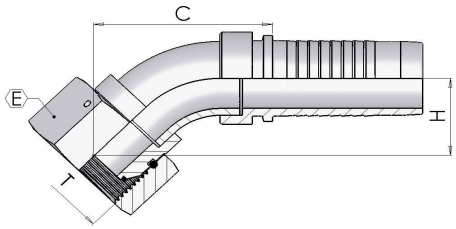




(*) - Femmina BSP con O-Ring
(*) - BSP female with O-Ring

O-Ring

	part number	hose I.D.		Dimension				
				dash	thread	hex	drop	cut-off
		in	mm	size	T	E	H	C
(*)	OL0604-01	1	25,4	16	1.1/4-11	50	33	70
(*)	OL0604-02	1.1/4	31,8	20	1.1/4-11	50	33	71
(*)	OL0604-03	1.1/4	31,8	20	1.1/2-11	55	41	91
(*)	OL0604-04	1.1/2	38,1	24	1.1/2-11	55	41	90
(*)	OL0604-05	1.1/2	38,1	24	2-11	70	53	114
(*)	OL0604-06	2	50,8	32	2-11	70	53	114

OL0402 Femmina BSP cono 60°Dado Libero


(DKR) BSP Female 60° Cone Slip On Nut

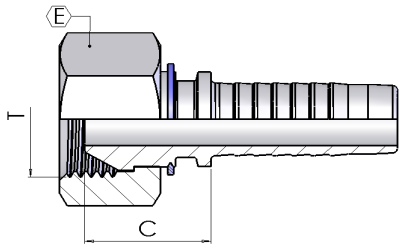

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0402-01	1/4	6,4	04	1/4-19	17	17
OL0402-02	3/8	9,5	06	3/8-19	19	17
OL0402-03	1/2	12,7	08	1/2-14	27	21

OL0605 Curva BSP 90°cono 60°Dado Libero


(DKR 90°) BSP 90° Swept Elbow 60° Cone Slip On Nut

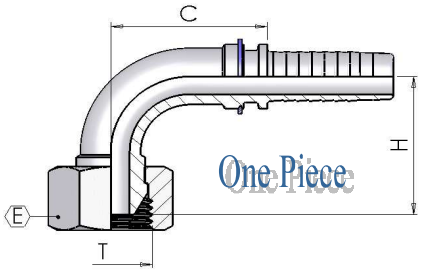

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0605-01	1/4	6,4	04	1/4-19	17	26	25
OL0605-02	3/8	9,5	06	3/8-19	19	30	34
OL0605-03	1/2	12,7	08	1/2-14	27	38	42

OL0606 Curva BSP 45°cono 60°Dado Libero


(DKR 45°) BSP 45° Swept Elbow 60° Cone Slip On Nut

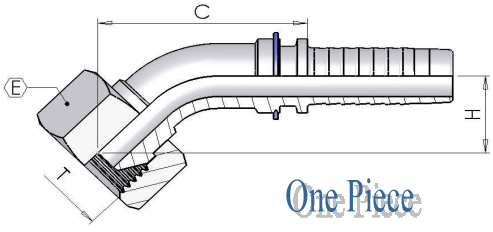

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0606-01	1/4	6,4	04	1/4-19	17	15	41
OL0606-02	3/8	9,5	06	3/8-19	19	15	34
OL0606-03	1/2	12,7	08	1/2-14	27	19	61

OL0403 Femmina BSP cono 60°con O'Ring


(DKR-OR) BSP O'Ring Female 60° Cone

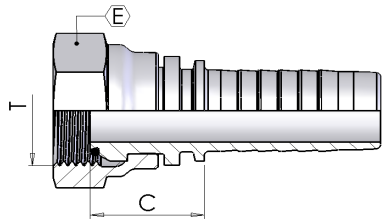

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0403-01	1/4	6,4	04	1/4-19	19	17
OL0403-02	3/8	9,5	06	3/8-19	22	19
OL0403-03	1/2	12,7	08	1/2-14	27	21
OL0403-04	5/8	15,9	10	5/8-14	30	21
OL0403-05	3/4	19	12	3/4-14	32	26
OL0403-06	1	25,4	16	1-11	38	28

OL0607 Curva BSP 90°cono 60°con O'Ring


(DKR-OR 90°) BSP O'Ring 90° Swept Elbow 60° Cone

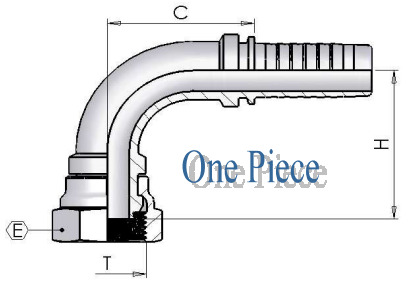

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0607-01	1/4	6,4	04	1/4-19	19	27	25
OL0607-02	3/8	9,5	06	3/8-19	22	34	33
OL0607-03	1/2	12,7	08	1/2-14	27	40	41
OL0607-04	5/8	15,9	10	5/8-14	30	46	43
OL0607-05	3/4	19	12	3/4-14	32	54	56
OL0607-06	1	25,4	16	1-11	38	67	70

OL0608 Curva BSP 45°cono 60°con O'Ring


(DKR-OR 45°) BSP O'Ring 45° Swept Elbow 60° Cone

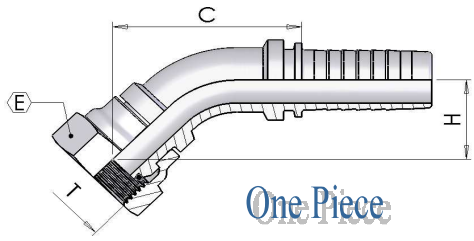

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0608-01	1/4	6,4	04	1/4-19	19	15	41
OL0608-02	3/8	9,5	06	3/8-19	22	21	52
OL0608-03	1/2	12,7	08	1/2-14	27	22	63
OL0608-04	5/8	15,9	10	5/8-14	30	23	68
OL0608-05	3/4	19	12	3/4-14	32	28	88
OL0608-06	1	25,4	16	1-11	38	33	105

OL0633 Compatta BSP 90°cono 60°(forgiata)


(DKR 90°K) BSP 90° Compact Elbow 60° Cone (forged)

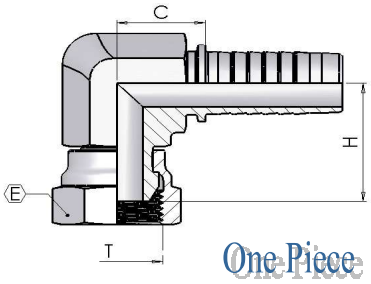

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0633-01	1/4	6,4	04	1/4-19	19	20	19
OL0633-02	1/4	6,4	04	3/8-19	22	29	24
OL0633-03	5/16	7,9	05	3/8-19	22	29	24
OL0633-04	3/8	9,5	06	3/8-19	22	23	23
OL0633-05	3/8	9,5	06	1/2-14	27	26	28
OL0633-06	1/2	12,7	08	3/8-19	22	30	28
OL0633-07	1/2	12,7	08	1/2-14	27	27	26
OL0633-08	3/4	19	12	3/4-14	32	32	32
OL0633-09	1	25,4	16	1-11	38	36	38

OL0630 Compatta BSP 90°cono 60°(saldata)

(DKR 90°K) BSP 90° Compact Elbow 60° Cone (welded)

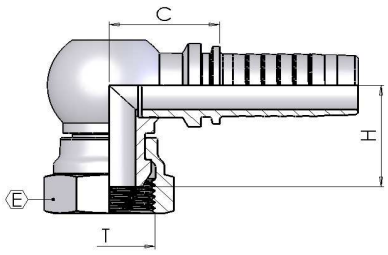


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0630-01	3/16	4,8	03	1/8-28	14	16	17
OL0630-02	5/8	15,9	10	5/8-14	28	27	30
OL0630-03	5/8	15,9	10	3/4-14	32	32	29

OL0632 Compatta BSP 90°cono 60°dado spinato (forgiata)

(DKR 90°K)

BSP 90° Compact Elbow 60° Cone Thrust Wire (forged)

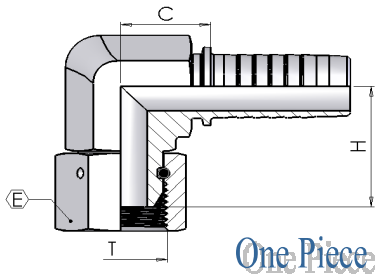


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0632-01	1/4	6,4	04	1/4-19	19	20	19
OL0632-02	1/4	6,4	04	3/8-19	22	29	24
OL0632-03	5/16	7,9	05	3/8-19	22	29	24
OL0632-04	3/8	9,5	06	3/8-19	22	23	23
OL0632-05	3/8	9,5	06	1/2-14	27	26	28
OL0632-06	1/2	12,7	08	3/8-19	22	30	28
OL0632-07	1/2	12,7	08	1/2-14	27	27	26
OL0632-08	3/4	19	12	3/4-14	32	32	32
OL0632-09	1	25,4	16	1-11	38	36	38

OL0631 Compatta BSP 90°cono 60°Dado Spinato (saldata)

(DKR 90°K)


BSP 90° Compact Elbow 60° Cone Thrust Wire (welded)

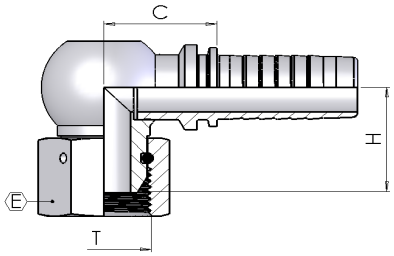

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0631-01	3/16	4,8	03	1/8-28	14	16	17
OL0631-02	1/2	12,7	08	3/4-14	32	32	34
OL0631-03	5/8	15,9	10	5/8-14	30	27	30
OL0631-04	5/8	15,9	10	3/4-14	32	33	34
OL0631-05	3/4	19	12	1-11	38	36	40
OL0631-06	1.1/4	31,8	20	1.1/4-11	50	46	47

OL0520 Occhio a Pressare BSP


(RNR) BSP Banjo

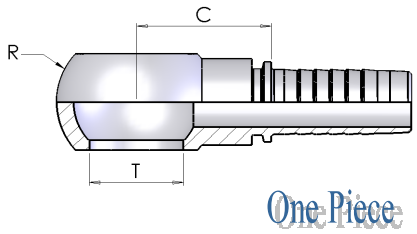

part number	hose I.D.		Dimension				
			dash	hole			cut-off
	in	mm	size	T	mm	R	C
OL0520-01	3/16	4,8	03	1/8-28	10,2	17	19
OL0520-02	3/16	4,8	03	1/4-19	13,3	24	26
OL0520-03	1/4	6,4	04	1/8-28	10,2	17	25
OL0520-04	1/4	6,4	04	1/4-19	13,3	24	26
OL0520-05	1/4	6,4	04	3/8-19	17,0	28	26
OL0520-06	5/16	7,9	05	1/4-19	13,3	24	26
OL0520-07	5/16	7,9	05	3/8-19	17,0	28	26
OL0520-08	3/8	9,5	06	1/4-19	13,3	24	26
OL0520-09	3/8	9,5	06	3/8-19	17,0	28	26
OL0520-10	3/8	9,5	06	1/2-14	21,2	36	31
OL0520-11	1/2	12,7	08	3/8-19	14,0	28	27
OL0520-12	1/2	12,7	08	1/2-14	21,2	36	31
OL0520-13	1/2	12,7	08	5/8-14	23,1	38	29
OL0520-14	1/2	12,7	08	3/4-14	26,5	45	38
OL0520-15	5/8	15,9	10	5/8-14	23,1	39	29
OL0520-16	5/8	15,9	10	3/4-14	26,5	45	38
OL0520-17	3/4	19	12	3/4-14	26,5	45	38
OL0520-18	3/4	19	12	1-11	33,5	58	49
OL0520-19	1	25,4	16	1-11	33,5	58	50

OL0405 Femmina Fissa BSP per Rondella


BSPP Fixed Female Dowty Seal

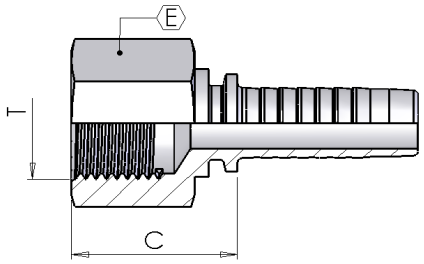

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0405-01	1/4	6,4	04	1/4-19	19	28
OL0405-02	3/8	9,5	06	3/8-19	22	23
OL0405-03	1/2	12,7	08	1/2-14	27	29
OL0405-04	3/4	19	12	3/4-14	32	33
OL0405-05	1	25,4	16	1-11	41	36
OL0405-06	1.1/4	31,8	20	1.1/4-11	50	41
OL0405-07	1.1/2	38,1	24	1.1/2-11	55	43
OL0405-08	2	50,8	32	2-11	65	45

OL0406 Femmina Fissa BSP per O'Ring


BSPP Fixed Female O'Ring Seal

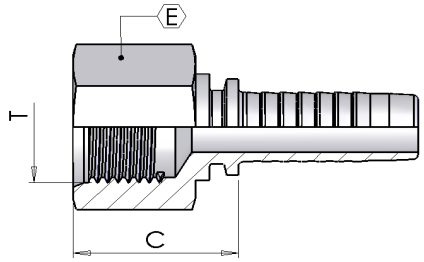

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0406-01	1/4	6,4	04	1/4-19	19	28
OL0406-02	3/8	9,5	06	3/8-19	22	23
OL0406-03	1/2	12,7	08	1/2-14	27	29
OL0406-04	3/4	19,0	12	3/4-14	32	33
OL0406-05	1	25,4	16	1-11	41	36
OL0406-06	1.1/4	31,8	20	1.1/4-11	50	41
OL0406-07	1.1/2	38,1	24	1.1/2-11	55	43
OL0406-08	2	50,8	32	2-11	65	45

OL0900 Maschio JIC cono 74°


(AGJ) JIC Male 74° cone

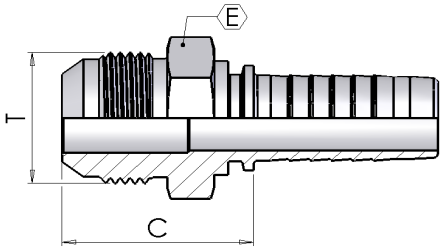

part number	hose I.D.		Dimension				
			dash	thread		hex	cut-off
	in	mm	size	T		E	C
OL0900-01	3/16	4,8	03	7/16-20		12	26
OL0900-02	1/4	6,4	04	7/16-20		12	27
OL0900-03	1/4	6,4	04	1/2-20		14	27
OL0900-04	1/4	6,4	04	9/16-18		15	27
OL0900-05	5/16	7,9	05	1/2-20		14	27
OL0900-06	5/16	7,9	05	9/16-18		15	27
OL0900-07	5/16	7,9	05	3/4-16		19	30
OL0900-08	3/8	9,5	06	9/16-18		15	27
OL0900-09	3/8	9,5	06	5/8-18	*SAE 45°	17	30
OL0900-10	3/8	9,5	06	3/4-16		19	30
OL0900-11	3/8	9,5	06	7/8-14		24	34
OL0900-12	1/2	12,7	08	9/16-18		19	28
OL0900-13	1/2	12,7	08	3/4-16		19	31
OL0900-14	1/2	12,7	08	7/8-14		24	35
OL0900-15	1/2	12,7	08	1.1/16-12		27	37
OL0900-16	5/8	15,9	10	7/8-14		24	35
OL0900-17	5/8	15,9	10	1.1/16-12		27	37
OL0900-18	3/4	19	12	7/8-14		24	36
OL0900-19	3/4	19	12	1.1/16-12		27	38
OL0900-20	3/4	19	12	1.3/16-12		32	41
OL0900-21	3/4	19	12	1.5/16-12		34	42
OL0900-22	3/4	19	12	1.5/8-12		42	45
OL0900-23	1	25,4	16	1.1/16-12		27	39
OL0900-24	1	25,4	16	1.3/16-12		32	42
OL0900-25	1	25,4	16	1.5/16-12		34	43
OL0900-26	1	25,4	16	1.5/8-12		42	46
OL0900-27	1.1/4	31,8	20	1.5/8-12		42	47
OL0900-28	1.1/4	31,8	20	1.7/8-12		50	52
OL0900-29	1.1/2	38,1	24	1.7/8-12		50	52
OL0900-30	2	50,8	32	2.1/2-12		65	62

OL0950 Femmina JIC svas. 74° Dado Spinato


(DKJ) JIC Female 74° cone Thrust Wire

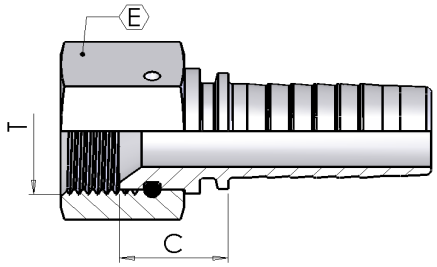

part number	hose I.D.		Dimension				
			dash	thread		hex	cut-off
	in	mm	size	T		E	C
OL0950-01	3/16	4,8	03	7/16-20		17	14
OL0950-02	1/4	6,4	04	7/16-20		17	14
OL0950-03	1/4	6,4	04	1/2-20		17	15
OL0950-04	1/4	6,4	04	9/16-18		19	16
OL0950-05	5/16	7,9	05	1/2-20		17	15
OL0950-06	5/16	7,9	05	9/16-18		19	16
OL0950-07	3/8	9,5	06	1/2-20		17	15
OL0950-08	3/8	9,5	06	9/16-18		19	16
OL0950-09	3/8	9,5	06	5/8-18	*SAE 45°	22	17
OL0950-10	3/8	9,5	06	3/4-16		24	17
OL0950-11	3/8	9,5	06	7/8-14		27	21
OL0950-12	1/2	12,7	08	3/4-16		24	18
OL0950-13	1/2	12,7	08	7/8-14		27	19
OL0950-14	1/2	12,7	08	1.1/16-12		32	24
OL0950-15	5/8	15,9	10	7/8-14		27	19
OL0950-16	5/8	15,9	10	1.1/16-12		32	21
OL0950-17	3/4	19	12	7/8-14		27	20
OL0950-18	3/4	19	12	1.1/16-12		32	22
OL0950-19	3/4	19	12	1.3/16-12		36	23
OL0950-20	3/4	19	12	1.5/16-12		41	23
OL0950-21	1	25,4	16	1.1/16-12		32	22
OL0950-22	1	25,4	16	1.3/16-12		36	24
OL0950-23	1	25,4	16	1.5/16-12		41	24
OL0950-24	1	25,4	16	1.5/8-12		50	27
OL0950-25	1.1/4	31,8	20	1.5/8-12		50	28
OL0950-26	1.1/4	31,8	20	1.7/8-12		55	31
OL0950-27	1.1/2	38,1	24	1.7/8-12		55	31
OL0950-28	2	50,8	32	2.1/2-12		70	31

OL0960 Femmina JIC svas. 74°

(DKJ) JIC Female 74° cone

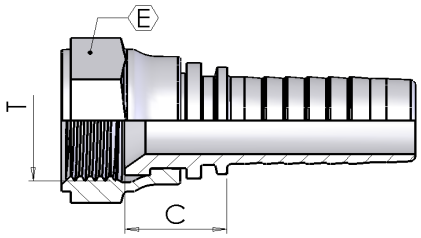


part number	hose I.D.		Dimension				
			dash	thread		hex	cut-off
	in	mm	size	T		E	C
OL0960-01	3/16	4,8	03	7/16-20		15	14
OL0960-02	3/16	4,8	03	1/2-20		17	14
OL0960-03	1/4	6,4	04	7/16-20		15	14
OL0960-04	1/4	6,4	04	1/2-20		17	15
OL0960-05	1/4	6,4	04	9/16-18		19	16
OL0960-06	1/4	6,4	04	5/8-18	*SAE 45°	22	17
OL0960-07	5/16	7,9	05	1/2-20		17	15
OL0960-08	5/16	7,9	05	9/16-18		19	16
OL0960-09	5/16	7,9	05	5/8-18	*SAE 45°	22	17
OL0960-10	5/16	7,9	05	3/4-16		24	17
OL0960-11	3/8	9,5	06	7/16-20		15	15
OL0960-12	3/8	9,5	06	1/2-20		17	15
OL0960-13	3/8	9,5	06	9/16-18		19	16
OL0960-14	3/8	9,5	06	5/8-18	*SAE 45°	22	15
OL0960-15	3/8	9,5	06	3/4-16		24	17
OL0960-16	3/8	9,5	06	7/8-14		27	21
OL0960-17	1/2	12,7	08	3/4-16		24	18
OL0960-18	1/2	12,7	08	7/8-14		27	19
OL0960-19	1/2	12,7	08	1.1/16-12		32	24
OL0960-20	5/8	15,9	10	7/8-14		27	19
OL0960-21	5/8	15,9	10	1.1/16-12		32	21
OL0960-22	3/4	19	12	7/8-14		27	20
OL0960-23	3/4	19	12	1.1/16-12		32	22
OL0960-24	3/4	19	12	1.3/16-12		36	21
OL0960-25	3/4	19	12	1.5/16-12		38	23
OL0960-26	1	25,4	16	1.1/16-12		32	23
OL0960-27	1	25,4	16	1.5/16-12		38	24

OL1005 Curva JIC 90°svas. 74°Dado Spinato

(DKJ 90°)

JIC 90° Swept Elbow 74° cone Thrust Wire

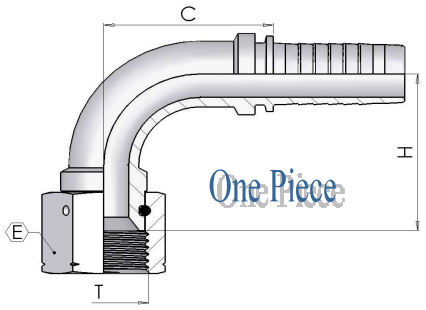


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1005-01	3/16	4,8	03	7/16-20	17	22	22
OL1005-02	1/4	6,4	04	7/16-20	17	24	25
OL1005-03	1/4	6,4	04	1/2-20	17	25	25
OL1005-04	1/4	6,4	04	9/16-18	19	27	25
OL1005-05	5/16	7,9	05	9/16-18	19	31	29
OL1005-06	5/16	7,9	05	3/4-16	24	41	29
OL1005-07	3/8	9,5	06	1/2-20	17	30	33
OL1005-08	3/8	9,5	06	9/16-18	19	32	31
* SAE 45° **OL1005-09**	3/8	9,5	06	5/8-18	22	32	33
OL1005-10	3/8	9,5	06	3/4-16	24	34	33
OL1005-11	3/8	9,5	06	7/8-14	27	36	33
OL1005-12	1/2	12,7	08	3/4-16	24	41	41
OL1005-13	1/2	12,7	08	7/8-14	27	40	41
OL1005-14	1/2	12,7	08	1.1/16-12	32	43	39
OL1005-15	5/8	15,9	10	7/8-14	27	44	43
OL1005-16	5/8	15,9	10	1.1/16-12	32	47	45
OL1005-17	3/4	19	12	7/8-14	27	53	56
OL1005-18	3/4	19	12	1.1/16-12	32	54	56
OL1005-19	3/4	19	12	1.3/16-12	36	54	57
OL1005-20	3/4	19	12	1.5/16-12	41	56	55
OL1005-21	1	25,4	16	1.1/16-12	32	64	70
OL1005-22	1	25,4	16	1.5/16-12	41	65	70
OL1005-23	1	25,4	16	1.5/8-12	50	74	70
OL1005-24	1.1/4	31,8	20	1.5/8-12	50	83	87
OL1005-25	1.1/2	38,1	24	1.7/8-12	55	97	102
OL1005-26	2	50,8	32	2.1/2-12	70	134	121

OL1010 Curva JIC 90°svas. 74°Dado Spinato (saldata)

(DKJ 90°)


JIC 90° Swept Elbow 74° cone Thrust Wire (welded)

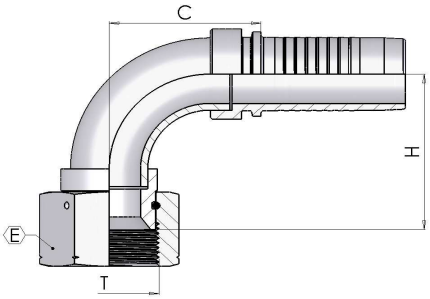

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1010-01	3/4	19	12	1.5/8-12	50	63	57
OL1010-02	1	25,4	16	1.3/16-12	36	69	62
OL1010-03	1	25,4	16	1.5/8-12	50	69	62
OL1010-04	1.1/4	31,8	20	1.5/8-12	50	69	63
OL1010-05	1.1/4	31,8	20	1.7/8-12	55	88	81
OL1010-06	1.1/2	38,1	24	1.7/8-12	55	88	81
OL1010-07	2	50,8	32	2.1/2-12	70	113	103

OL1000 Curva JIC 90° svas. 74°

(DKJ 90°) JIC 90° Swept Elbow 74° cone

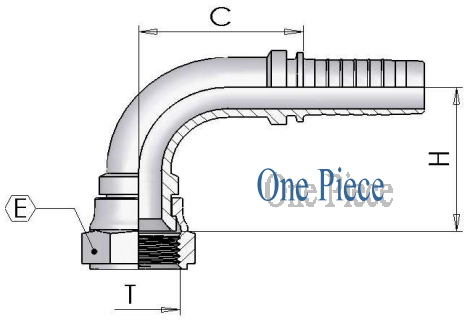


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1000-01	3/16	4,8	03	7/16-20	15	22	22
OL1000-02	3/16	4,8	03	1/2-20	17	23	25
OL1000-03	1/4	6,4	04	7/16-20	15	24	25
OL1000-04	1/4	6,4	04	1/2-20	17	25	25
OL1000-05	1/4	6,4	04	9/16-18	19	27	25
OL1000-06	5/16	7,9	05	1/2-20	17	30	29
OL1000-07	5/16	7,9	05	9/16-18	19	31	29
OL1000-08	3/8	9,5	06	1/2-20	17	30	33
OL1000-09	3/8	9,5	06	9/16-18	19	32	31
* SAE 45° **OL1000-10**	3/8	9,5	06	5/8-18	22	32	33
OL1000-11	3/8	9,5	06	3/4-16	24	34	33
OL1000-12	3/8	9,5	06	7/8-14	27	36	33
OL1000-13	1/2	12,7	08	3/4-16	24	41	41
OL1000-14	1/2	12,7	08	7/8-14	27	40	41
OL1000-15	1/2	12,7	08	1.1/16-12	32	43	39
OL1000-16	5/8	15,9	10	7/8-14	27	44	43
OL1000-17	5/8	15,9	10	1.1/16-12	32	47	45
OL1000-18	3/4	19	12	7/8-14	27	53	56
OL1000-19	3/4	19	12	1.1/16-12	32	54	56
OL1000-20	3/4	19	12	1.3/16-12	36	53	56
OL1000-21	3/4	19	12	1.5/16-12	38	56	55
OL1000-22	1	25,4	16	1.1/16-12	32	62	70
OL1000-23	1	25,4	16	1.5/16-12	38	65	70

OL1055 Curva JIC 45°svas. 74°Dado Spinato

(DKJ 45°)

JIC 45°Swept Elbow 74°cone Thrust Wire

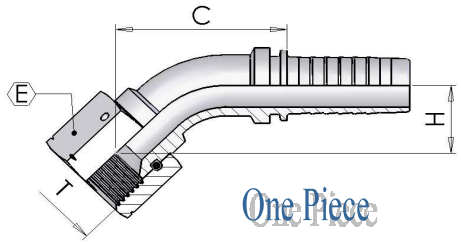


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1055-01	3/16	4,8	03	7/16-20	17	15	33
OL1055-02	1/4	6,4	04	7/16-20	17	13	38
OL1055-03	1/4	6,4	04	1/2-20	17	14	40
OL1055-04	1/4	6,4	04	9/16-18	19	16	42
OL1055-05	5/16	7,9	05	9/16-18	19	18	47
OL1055-06	3/8	9,5	06	1/2-20	17	17	51
OL1055-07	3/8	9,5	06	9/16-18	19	17	51
* SAE 45° **OL1055-08**	3/8	9,5	06	5/8-18	22	17	51
OL1055-09	3/8	9,5	06	3/4-16	24	19	52
OL1055-10	3/8	9,5	06	7/8-14	27	21	54
OL1055-11	1/2	12,7	08	3/4-16	24	22	62
OL1055-12	1/2	12,7	08	7/8-14	27	23	64
OL1055-13	1/2	12,7	08	1.1/16-12	32	25	68
OL1055-14	5/8	15,9	10	7/8-14	27	24	68
OL1055-15	5/8	15,9	10	1.1/16-12	32	25	70
OL1055-16	3/4	19	12	7/8-14	27	27	83
OL1055-17	3/4	19	12	1.1/16-12	32	28	84
OL1055-18	3/4	19	12	1.3/16-12	36	29	85
OL1055-19	3/4	19	12	1.5/16-12	41	30	88
OL1055-20	1	25,4	16	1.1/16-12	32	32	103
OL1055-21	1	25,4	16	1.5/16-12	41	33	104
OL1055-22	1.1/4	31,8	20	1.5/8-12	50	40	108
OL1055-23	1.1/2	38,1	24	1.7/8-12	55	49	119
OL1055-24	2	50,8	32	2.1/2-12	70	65	142

OL1060 Curva JIC 45°svas. 74°Dado Spinato (saldata)

(DKJ 45°)


JIC 45°Swept Elbow 74°cone Thrust Wire (welded)

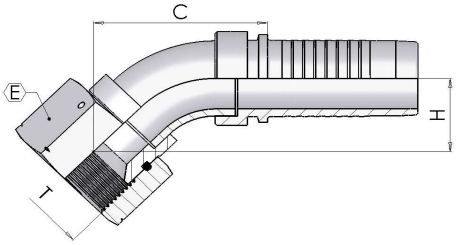

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1060-01	3/4	19	12	1.5/8-12	50	31	68
OL1060-02	1	25,4	16	1.3/16-12	36	33	72
OL1060-03	1	25,4	16	1.5/8-12	50	31	68
OL1060-04	1.1/4	31,8	20	1.5/8-12	50	45	83
OL1060-05	1.1/4	31,8	20	1.7/8-12	55	39	89
OL1060-06	1.1/2	38,1	24	1.7/8-12	55	55	105
OL1060-07	2	50,8	32	2.1/2-12	70	70	132

OL1050 Curva JIC 45°svas. 74°


(DKJ 45°) JIC 45° Swept Elbow 74° Cone

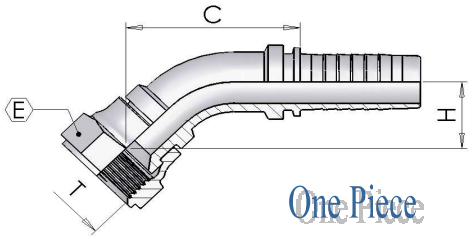

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1050-01	3/16	4,8	03	7/16-20	15	15	33
OL1050-02	1/4	6,4	04	7/16-20	15	13	38
OL1050-03	1/4	6,4	04	1/2-20	17	14	40
OL1050-04	1/4	6,4	04	9/16-18	19	16	42
OL1050-05	5/16	7,9	05	1/2-20	17	17	46
OL1050-06	5/16	7,9	05	9/16-18	19	18	47
OL1050-07	3/8	9,5	06	9/16-18	19	17	51
* SAE 45° **OL1050-08**	3/8	9,5	06	5/8-18	22	17	51
OL1050-09	3/8	9,5	06	3/4-16	24	19	52
OL1050-10	1/2	12,7	08	3/4-16	24	22	62
OL1050-11	1/2	12,7	08	7/8-14	27	23	64
OL1050-12	1/2	12,7	08	1.1/16-12	32	25	68
OL1050-13	5/8	15,9	10	7/8-14	27	23	68
OL1050-14	5/8	15,9	10	1.1/16-12	32	25	70
OL1050-15	3/4	19	12	1.1/16-12	32	28	84
OL1050-16	3/4	19	12	1.3/16-12	36	28	83
OL1050-17	3/4	19	12	1.5/16-12	38	30	88
OL1050-18	1	25,4	16	1.5/16-12	38	33	104

OL0961 Femmina JIC Svas.74°Doppio Esagono

(DKJ) JIC Female 74° Cone Back Hexagon

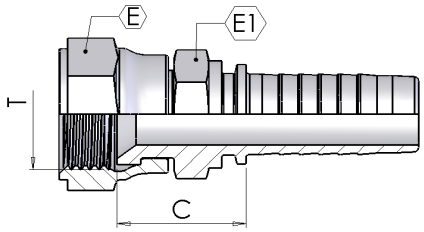


part number	hose I.D.		Dimension				
			dash	thread	hex	hex	cut-off
	in	mm	size	T	E	E1	C
OL0961-01	1/4	6,4	04	7/16-20	17	12	20
OL0961-02	1/4	6,4	04	1/2-20	17	14	20
OL0961-03	1/4	6,4	04	9/16-18	19	14	22
OL0961-04	5/16	7,9	05	1/2-20	17	14	20
OL0961-05	5/16	7,9	05	9/16-18	19	15	22
OL0961-06	3/8	9,5	06	9/16-18	19	17	24
OL0961-07	3/8	9,5	06	3/4-16	24	19	26
OL0961-08	1/2	12,7	08	3/4-16	24	22	26
OL0961-09	1/2	12,7	08	7/8-14	27	22	27
OL0961-10	5/8	15,9	10	7/8-14	27	22	26
OL0961-11	5/8	15,9	10	1.1/16-12	32	27	27
OL0961-12	3/4	19	12	1.1/16-12	32	27	32
OL0961-13	1	25,4	16	1.5/16-12	38	35	38

Inserto standard / Standard tail

OL0635 Compatta JIC 90° svas. 74° Dado Crimpato (forgiata)

(DKJ 90°K)

JIC 90° Compact Elbow 74° Cone Rolled Nut (forged)

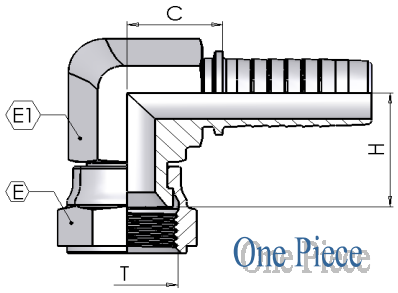


part number	hose I.D.		Dimension					
			dash	thread	hex		drop	cut-off
	in	mm	size	T	E	E1	H	C
OL0635-01	1/4	6,4	04	7/16-20	15	15	17	19
OL0635-02	1/4	6,4	04	1/2-20	17	15	18	19
OL0635-03	1/4	6,4	04	9/16-18	19	15	19	19
OL0635-04	5/16	7,9	05	9/16-18	19	17	20	20
OL0635-05	3/8	9,5	06	9/16-18	19	17	20	23
OL0635-06	3/8	9,5	06	3/4-16	24	22	22	24
OL0635-07	1/2	12,7	08	3/4-16	24	22	23	26
OL0635-08	1/2	12,7	08	7/8-14	27	22	24	26
OL0635-09	3/4	19	12	1.1/16-12	32	27	29	32
OL0635-10	1	25,4	16	1.5/16-12	38	32	34	38

OL0636 Compatta JIC 90° svas. 74° Dado Spinato (forgiata)

(DKJ 90°K)

JIC 90° Compact Elbow 74° Cone Thrust Wire (forged)

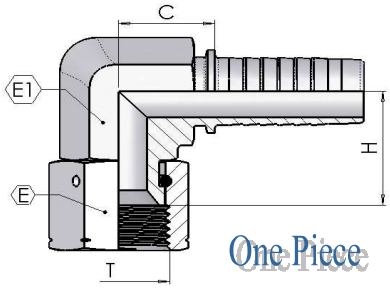


part number	hose I.D.		Dimension					
			dash	thread	hex		drop	cut-off
	in	mm	size	T	E	E1	H	C
OL0636-01	1/4	6,4	04	7/16-20	17	15	17	19
OL0636-02	1/4	6,4	04	1/2-20	17	15	18	19
OL0636-03	1/4	6,4	04	9/16-18	19	15	19	19
OL0636-04	5/16	7,9	05	9/16-18	19	17	20	20
OL0636-05	3/8	9,5	06	9/16-18	19	17	20	23
* SAE 45° **OL0636-06**	3/8	9,5	06	5/8-18	22	17	21	23
OL0636-07	3/8	9,5	06	3/4-16	24	22	22	24
OL0636-08	1/2	12,7	08	3/4-16	24	22	23	26
OL0636-09	1/2	12,7	08	7/8-14	27	22	24	26
OL0636-10	3/4	19	12	1.1/16-12	32	27	29	32
OL0636-11	1	25,4	16	1.5/16-12	41	32	34	38

OL0634 Compatta JIC 90° svas. 74° Dado Spinato (saldata)

(DKJ 90°K)

JIC 90° Compact Elbow 74° Cone Thrust Wire (welded)

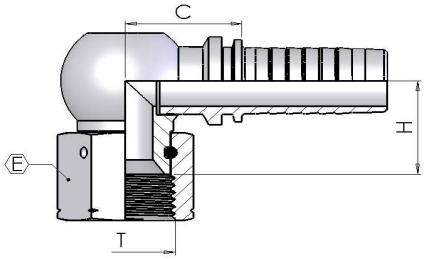


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0634-01	5/8	15,9	10	7/8-14	27	26	28
OL0634-02	5/8	15,9	10	1.1/16-12	32	28	29

Inserto standard / Standard tail

OL0970 Femmina JIC svas. 74°Dado Libero

(DKJ)

JIC Female 74°Cone Slip On Nut

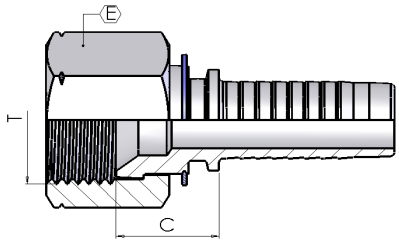


part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0970-01	1/4	6,4	04	1/2-20	17	17
OL0970-02	1/4	6,4	04	9/16-18	19	17
OL0970-03	5/16	7,9	05	9/16-18	19	16
OL0970-04	3/8	9,5	08	3/4-16	22	18
OL0970-05	1/2	12,7	08	7/8-14	27	20
OL0970-06	5/8	15,9	10	1.1/16-12	32	20
OL0970-07	3/4	19	12	1.5/16-12	38	21

OL1015 Curva JIC 90°svas. 74°Dado Libero

(DKJ 90°)

JIC 90°Swept Elbow 74°Cone Slip On Nut

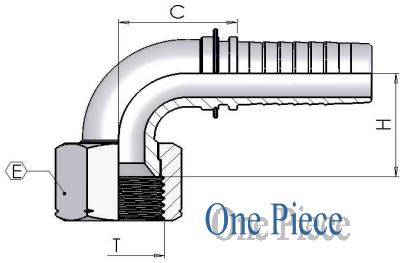


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1015-01	1/4	6,4	04	1/2-20	17	21	27
OL1015-02	1/4	6,4	04	9/16-18	19	21	26
OL1015-03	5/16	7,9	05	9/16-18	19	32	25
OL1015-04	3/8	9,5	08	3/4-16	22	26	35
OL1015-05	1/2	12,7	08	7/8-14	27	32	40
OL1015-06	5/8	15,9	10	1.1/16-12	32	37	47
OL1015-07	3/4	19	12	1.1/16-12	32	45	58
OL1015-08	3/4	19	12	1.5/16-12	38	57	56

OL1065 Curva JIC 45°svas. 74°Dado Libero

(DKJ 45°)

JIC 45°Swept Elbow 74°Cone Slip On Nut

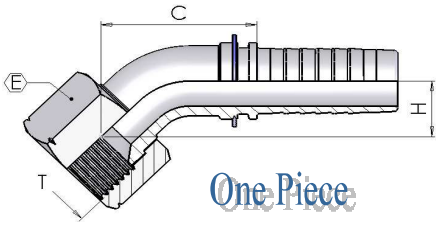


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1065-01	1/4	6,4	04	1/2-20	17	11	38
OL1065-02	1/4	6,4	04	9/16-18	19	11	38
OL1065-03	5/16	7,9	05	9/16-18	19	20	49
OL1065-04	3/8	9,5	08	3/4-16	22	13	48
OL1065-05	1/2	12,7	08	7/8-14	27	16	58
OL1065-06	5/8	15,9	10	1.1/16-12	32	18	66
OL1065-07	3/4	19	12	1.1/16-12	32	21	81
OL1065-08	3/4	19	12	1.5/16-12	38	30	86

Inserto standard / Standard tail

OL1610 Maschio SAE O-Ring Sede Piana

(SAE-OR)

SAE Male O-Ring Flat Seat

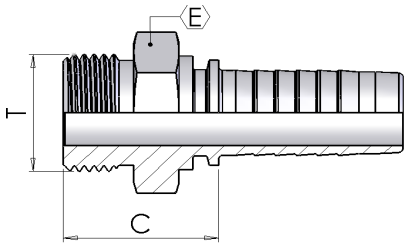


part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL1610-01	1/4	6,4	04	7/16-20	14	24
OL1610-02	1/4	6,4	04	1/2-20	17	24
OL1610-03	1/4	6,4	04	9/16-18	17	24
OL1610-04	5/16	7,9	05	9/16-18	17	24
OL1610-05	3/8	9,5	06	9/16-18	17	25
OL1610-06	3/8	9,5	06	3/4-16	22	28
OL1610-07	1/2	12,7	08	3/4-16	22	28
OL1610-08	1/2	12,7	08	7/8-14	27	30
OL1610-09	1/2	12,7	08	1.1/16-12	32	32
OL1610-10	5/8	15,9	10	7/8-14	27	30
OL1610-11	5/8	15,9	10	1.1/16-12	32	32
OL1610-12	3/4	19	12	7/8-14	27	31
OL1610-13	3/4	19	12	1.1/16-12	32	33
OL1610-14	3/4	19	12	1.5/16-12	38	36
OL1610-15	1	25,4	16	1.5/16-12	38	37

OL1630 Maschio Girevole O-Ring

(BOSS)

Swivel Male O-Ring

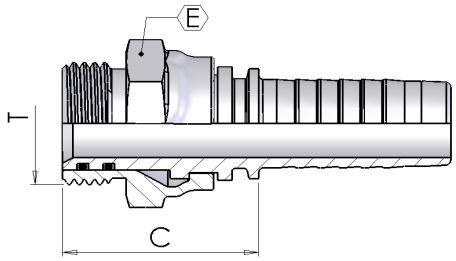


part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL1630-01	1/2	12,7	08	7/8-14	27	39
OL1630-02	5/8	15,9	10	7/8-14	27	39
OL1630-03	3/4	19	12	1.1/16-12	32	43

OL1470 Maschio Girevole 90° O-Ring

(BOSS 90°)


90° SWIVEL MALE O-RING

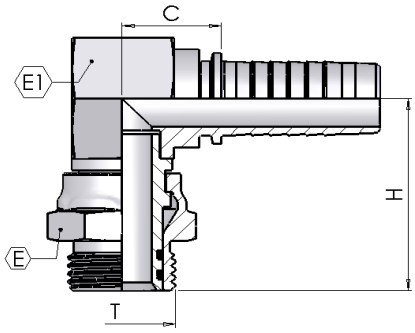

part number	hose I.D.		Dimension					
			dash	thread	hex	hex	drop	cut-off
	in	mm	size	T	E	E1	H	C
OL1470-01	1/2	12,7	08	7/8-14	27	27	42	28
OL1470-02	5/8	15,9	10	7/8-14	27	27	42	29
OL1470-03	3/4	19	12	1.1/16-12	32	32	48	30

OL1620 Maschio SAE Girevole Cono Inverso


(SIF) Straight Male Inverted Flare Swivel

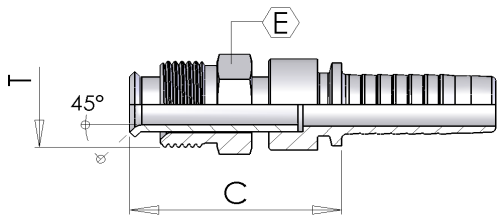

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL1620-01	1/4	6,4	04	7/16-24	12	38
OL1620-02	1/4	6,4	04	1/2-20	14	55
OL1620-03	5/8	7,9	05	7/16-24	12	56
OL1620-04	5/8	7,9	05	1/2-20	14	56
OL1620-05	5/8	7,9	05	5/8-18	17	56
OL1620-06	3/8	9,5	06	7/16-24	12	56
OL1620-07	3/8	9,5	06	1/2-20	14	56
OL1620-08	3/8	9,5	06	5/8-18	17	57
OL1620-09	3/8	9,5	06	11/16-18	19	42
OL1620-10	1/2	12,7	08	3/4-18	19	60

OL1460 Maschio SAE Girevole Cono Inverso a 90°


(SIF 90°) 90° Male Inverted Flare Swivel

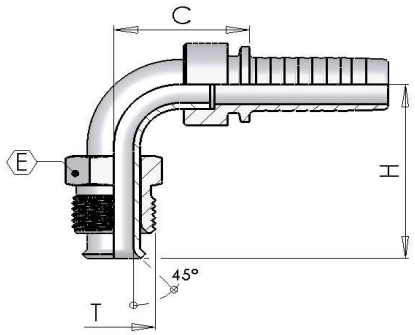

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1460-01	1/4	6,4	04	7/16-24	12	36	29
OL1460-02	1/4	6,4	04	1/2-20	14	34	30
OL1460-03	5/8	7,9	05	7/16-24	12	38	24
OL1460-04	5/8	7,9	05	1/2-20	14	35	30
OL1460-05	5/8	7,9	05	5/8-18	17	43	30
OL1460-06	3/8	9,5	06	7/16-24	12	35	30
OL1460-07	3/8	9,5	06	1/2-20	14	35	30
OL1460-08	3/8	9,5	06	5/8-18	17	44	31
OL1460-09	3/8	9,5	06	11/16-18	19	42	31
OL1460-10	1/2	12,7	08	3/4-18	19	45	35

OL1560 Maschio SAE Girevole Cono Inverso a 45°


(SIF 45°) 45° Male Inverted Flare Swivel

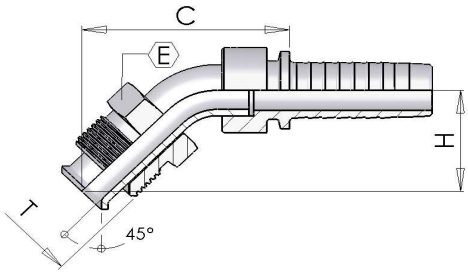

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1560-01	3/8	9,5	06	7/16-24	12	25	48
OL1560-02	3/8	9,5	06	1/2-20	14	25	48
OL1560-03	3/8	9,5	06	5/8-18	17	30	54
OL1560-04	3/8	9,5	06	11/16-18	19	30	54

OL0550 Maschio Metrico Svas.60°


(AGM) Metric Male 60° cone

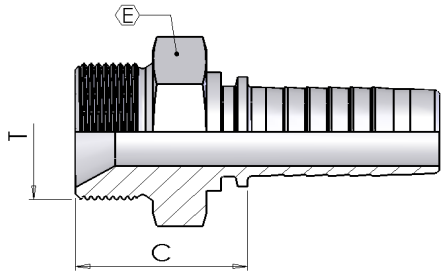

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0550-01	3/16	4,8	03	M10-1	14	19
OL0550-02	3/16	4,8	03	M12-1.5	17	25
OL0550-03	1/4	6,4	04	M10-1	14	20
OL0550-04	1/4	6,4	04	M12-1.5	17	26
OL0550-05	1/4	6,4	04	M14-1.5	19	26
OL0550-06	1/4	6,4	04	M16-1.5	22	26
OL0550-07	5/16	7,9	05	M12-1.5	17	26
OL0550-08	5/16	7,9	05	M16-1.5	22	26
OL0550-09	5/16	7,9	05	M18-1.5	24	26
OL0550-10	3/8	9,5	06	M14-1.5	19	26
OL0550-11	3/8	9,5	06	M16-1.5	22	26
OL0550-12	3/8	9,5	06	M18-1.5	24	27
OL0550-13	3/8	9,5	06	M22-1.5	27	27
OL0550-14	1/2	12,7	08	M18-1.5	24	28
OL0550-15	1/2	12,7	08	M22-1.5	27	30
OL0550-16	5/8	15,9	10	M26-1.5	32	32
OL0550-17	3/4	19	12	M26-1.5	32	33
OL0550-18	3/4	19	12	M30-1.5	36	36
OL0550-19	1	25,4	16	M38-1.5	46	37
OL0550-20	1.1/4	31,8	20	M45-1.5	55	39

OL0411 Femmina Metrica Cono 24° Serie Leggera Multiseal


(DKL) Metric Female 24° Seat Light Multiseal

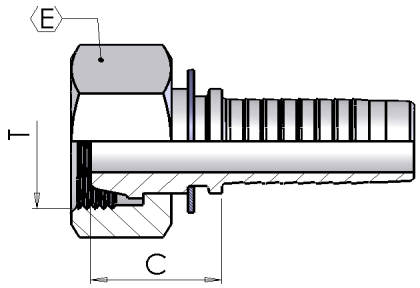

part number	hose I.D.		Dimension				
			dash	thread	*erm.*	hex	cut-off
	in	mm	size	T		E	C
OL0411-01	3/16	4,8	03	M12-1.5	*6*	14	19
OL0411-02	3/16	4,8	03	M16-1.5	*10*	19	18
OL0411-03	1/4	6,4	04	M14-1.5	*8*	17	19
OL0411-04	1/4	6,4	04	M16-1.5	*10*	19	19
OL0411-05	5/16	7,9	05	M16-1.5	*10*	19	19
OL0411-06	5/16	7,9	05	M18-1.5	*12*	22	21
OL0411-07	3/8	9,5	06	M18-1.5	*12*	22	23
OL0411-08	3/8	9,5	06	M22-1.5	*15*	27	22
OL0411-09	1/2	12,7	08	M22-1.5	*15*	27	22
OL0411-10	1/2	12,7	08	M26-1.5	*18*	32	24
OL0411-11	5/8	15,9	10	M26-1.5	*18*	32	24

OL0450 Femmina Metrica Cono 60°


(DKM) Metric Female 60° cone

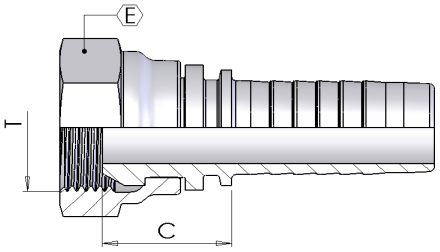

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0450-01	3/4	19	12	M30-1.5	36	23
OL0450-02	1	25,4	16	M38-1.5	46	33
OL0450-03	1.1/4	31,8	20	M45-1.5	50	34
OL0450-04	1.1/2	38	24	M52x1,5	60	35
OL0450-05	2	50,8	32	M65-2	75	31

OL0650 Curva Metrica 90°Cono 24°Serie Leggera Multiseal


(DKL 90°) 90°Metric Swept Elbow 24°Seat Light Multiseal

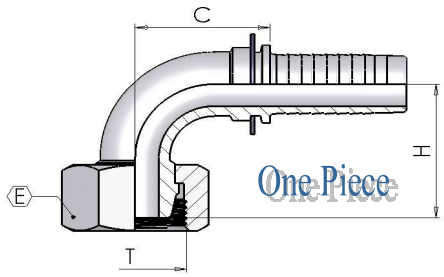

part number	hose I.D.		Dimension					
			dash	thread	*erm.*	hex	drop	cut-off
	in	mm	size	T		E	H	C
OL0650-01	1/4	6,4	04	M14-1.5	*8*	17	25	25
OL0650-02	1/4	6,4	04	M16-1.5	*10*	19	24	26
OL0650-03	5/16	7,9	05	M16-1.5	*10*	19	29	32
OL0650-04	5/16	7,9	05	M18-1.5	*12*	22	30	31
OL0650-05	3/8	9,5	06	M18-1.5	*12*	22	33	32
OL0650-06	3/8	9,5	06	M22-1.5	*15*	27	34	33
OL0650-07	1/2	12,7	08	M22-1.5	*15*	27	38	41
OL0650-08	5/8	15,9	10	M26-1.5	*18*	32	42	46

OL1020 Curva Metrica 90°cono 60°


(DKM 90°) 90°Metric Swept Elbow 60°cone

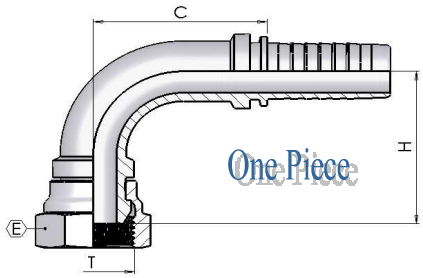

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1020-01	1	25,4	16	M38-1.5	46	71	70

OL1020 Curva Metrica 90°cono 60°(saldata)


(DKM 90°) 90°Metric Swept Elbow 60°cone (welded)

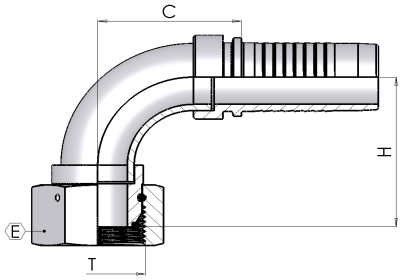

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1020-10	3/4	19	12	M30-1.5	36	57	48
OL1020-11	1.1/4	31,8	20	M45-1.5	50	71	63

OL0750 Curva Metrica 45°Cono 24°Serie Leggera Multiseal


(DKL 45°) 45°Metric Swept Elbow 24°Seat Light Multiseal

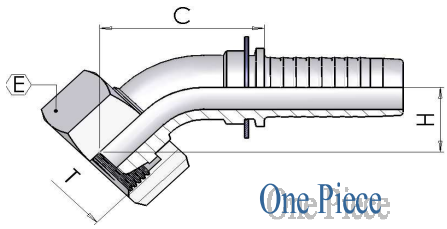

part number	hose I.D.		Dimension					
			dash	thread	*erm.*	hex	drop	cut-off
	in	mm	size	T		E	H	C
OL0750-01	1/4	6,4	04	M12-1.5	*6*	14	15	36
OL0750-02	1/4	6,4	04	M14-1.5	*8*	17	14	40
OL0750-03	1/4	6,4	04	M16-1.5	*10*	19	16	37
OL0750-04	5/16	7,9	05	M16-1.5	*10*	19	14	47
OL0750-05	5/16	7,9	05	M18-1.5	*12*	22	16	49
OL0750-06	3/8	9,5	06	M18-1.5	*12*	22	16	50
OL0750-07	1/2	12,7	08	M22-1.5	*15*	27	21	61

OL1070 Curva Metrica 45°cono 60°


(DKM 45°) 45°Metric Swept Elbow 60°cone

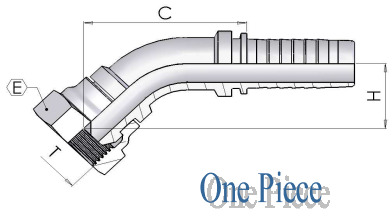

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1070-01	1	25,4	16	M38-1.5	46	38	109

OL1070 Curva Metrica 45°cono 60°(saldata)


(DKM 45°) 45°Metric Swept Elbow 60°cone (welded)

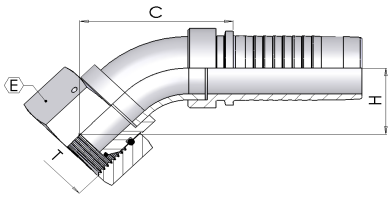

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL1070-10	3/4	19	12	M30-1.5	36	27	57
OL1070-11	1.1/4	31,8	20	M45-1.5	50	27	73

OL0850 Maschio Metrico svas. 24°Serie Leggera


(CEL) Metric Male 24° Seat Light

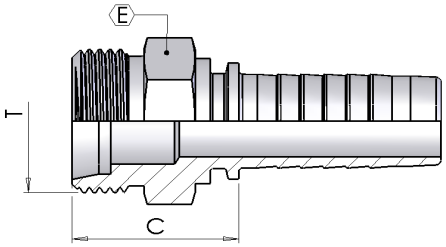

part number	hose I.D.		Dimension				
			dash	thread	*erm.*	hex	cut-off
	in	mm	size	T		E	C
OL0850-01	3/16	4,8	03	M12-1.5	*6*	14	22
OL0850-02	1/4	6,4	04	M12-1.5	*6*	14	23
OL0850-03	1/4	6,4	04	M14-1.5	*8*	14	22
OL0850-04	1/4	6,4	04	M16-1.5	*10*	17	23
OL0850-05	1/4	6,4	04	M18-1.5	*12*	19	24
OL0850-06	5/16	7,9	05	M14-1.5	*8*	14	22
OL0850-07	5/16	7,9	05	M16-1.5	*10*	17	23
OL0850-08	5/16	7,9	05	M18-1.5	*12*	19	24
OL0850-09	5/16	7,9	05	M22-1.5	*15*	22	25
OL0850-10	3/8	9,5	06	M16-1.5	*10*	17	23
OL0850-11	3/8	9,5	06	M18-1.5	*12*	19	24
OL0850-12	3/8	9,5	06	M22-1.5	*15*	22	25
OL0850-13	1/2	12,7	08	M18-1.5	*12*	19	25
OL0850-14	1/2	12,7	08	M22-1.5	*15*	22	26
OL0850-15	1/2	12,7	08	M26-1.5	*18*	27	27
OL0850-16	5/8	15,9	10	M22-1.5	*15*	22	26
OL0850-17	5/8	15,9	10	M26-1.5	*18*	27	27
OL0850-18	5/8	15,9	10	M30-2	*22*	30	32
OL0850-19	3/4	19	12	M26-1.5	*18*	27	28
OL0850-20	3/4	19	12	M30-2	*22*	30	33
OL0850-21	1	25,4	16	M36-2	*28*	36	32
OL0850-22	1.1/4	31,8	20	M45-2	*35*	46	36
OL0850-23	1.1/2	38,1	24	M52-2	*42*	55	38

OL0800 Maschio Metrico svas. 24° Serie Pesante


(CES) Metric Male 24° Seat Heavy

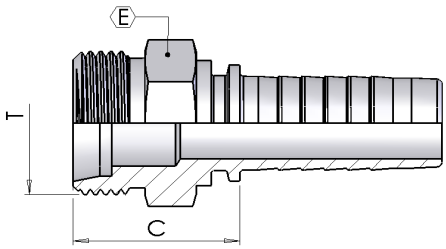

part number	hose I.D.		Dimension				
			dash	thread	*erm.*	hex	cut-off
	in	mm	size	T		E	C
OL0800-01	3/16	4,8	03	M16-1.5	*8*	17	26
OL0800-02	1/4	6,4	04	M14-1.5	*6*	14	25
OL0800-03	1/4	6,4	04	M16-1.5	*8*	17	27
OL0800-04	1/4	6,4	04	M18-1.5	*10*	19	27
OL0800-05	5/16	7,9	05	M18-1.5	*10*	19	27
OL0800-06	5/16	7,9	05	M20-1.5	*12*	22	29
OL0800-07	3/8	9,5	06	M18-1.5	*10*	19	27
OL0800-08	3/8	9,5	06	M20-1.5	*12*	22	29
OL0800-09	3/8	9,5	06	M22-1.5	*14*	22	31
OL0800-10	3/8	9,5	06	M24-1.5	*16*	24	31
OL0800-11	1/2	12,7	08	M24-1.5	*16*	24	32
OL0800-12	5/8	15,9	10	M30-2	*20*	30	34
OL0800-13	3/4	19	12	M30-2	*20*	30	35
OL0800-14	3/4	19	12	M36-2	*25*	36	38
OL0800-15	1	25,4	16	M36-2	*25*	36	39
OL0800-16	1	25,4	16	M42-2	*30*	46	42
OL0800-17	1.1/4	31,8	20	M42-2	*30*	46	43
OL0800-18	1.1/4	31,8	20	M52-2	*38*	55	45
OL0800-19	1.1/2	38,1	24	M52-2	*38*	55	45

OL0408 Femmina Metrica cono 24° Serie Leggera


(DKOL) Metric Female 24° Seat Light

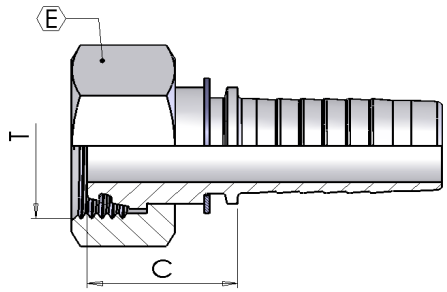

part number	hose I.D.		Dimension				
			dash	thread	*erm.*	hex	cut-off
	in	mm	size	T		E	C
OL0408-01	3/16	4,8	03	M12-1.5	*6*	14	23
OL0408-02	1/4	6,4	04	M14-1.5	*8*	17	24
OL0408-03	1/4	6,4	04	M16-1.5	*10*	19	24
OL0408-04	1/4	6,4	04	M18-1.5	*12*	22	25
OL0408-05	5/16	7,9	05	M16-1.5	*10*	19	24
OL0408-06	5/16	7,9	05	M18-1.5	*12*	22	25
OL0408-07	3/8	9,5	06	M18-1.5	*12*	22	25
OL0408-08	3/8	9,5	06	M22-1.5	*15*	27	29
OL0408-09	1/2	12,7	08	M22-1.5	*15*	27	29
OL0408-10	1/2	12,7	08	M26-1.5	*18*	32	29
OL0408-11	5/8	15,9	10	M26-1.5	*18*	32	29
OL0408-12	5/8	15,9	12	M30-2	*22*	36	29
OL0408-13	3/4	19	12	M30-2	*22*	36	29
OL0408-14	3/4	19	12	M36-2	*28*	41	28
OL0408-15	1	25,4	16	M36-2	*28*	41	30
OL0408-16	1.1/4	31,8	20	M45-2	*35*	50	40
OL0408-17	1.1/2	38,1	24	M52-2	*42*	60	41

OL0415 Femmina Metrica cono 24° Serie Leggera (dado rullat o)


(DKOL) Metric Female 24° Seat Light (rolled nut)

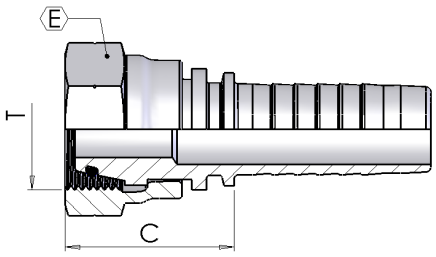

part number	hose I.D.		Dimension				
			dash	thread	*erm.*	hex	cut-off
	in	mm	size	T		E	C
OL0415-01	1/4	6,4	04	M12-1.5	*6*	14	25
OL0415-02	5/16	7,9	05	M14-1.5	*8*	19	26
OL0415-03	3/8	9,5	06	M16-1.5	*10*	19	25
OL0415-04	1/2	12,7	08	M18-1.5	*12*	24	28
OL0415-05	5/8	15,9	10	M22-1.5	*15*	27	32
OL0415-06	3/4	19	12	M26-1.5	*18*	32	36

OL0409 Femmina Metrica cono 24° Serie Pesante


(DKOS) Metric Female 24° Seat Heavy

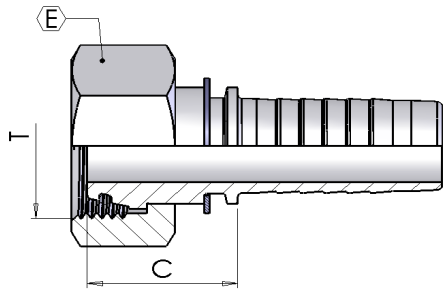

part number	hose I.D.		Dimension				
			dash	thread	*erm.*	hex	cut-off
	in	mm	size	T		E	C
OL0409-01	3/16	4,8	03	M16-1.5	*8*	19	25
OL0409-02	1/4	6,4	04	M14-1.5	*6*	17	23
OL0409-03	1/4	6,4	04	M16-1.5	*8*	19	25
OL0409-04	1/4	6,4	04	M18-1.5	*10*	22	24
OL0409-05	5/16	7,9	05	M18-1.5	*10*	22	24
OL0409-06	5/16	7,9	05	M20-1.5	*12*	24	26
OL0409-07	3/8	9,5	06	M16-1.5	*8*	19	26
OL0409-08	3/8	9,5	06	M18-1.5	*10*	22	25
OL0409-09	3/8	9,5	06	M20-1.5	*12*	24	25
OL0409-10	3/8	9,5	06	M22-1.5	*14*	27	29
OL0409-11	1/2	12,7	08	M22-1.5	*14*	27	17
OL0409-12	1/2	12,7	08	M24-1.5	*16*	30	30
OL0409-13	1/2	12,7	08	M30-2	*20*	36	33
OL0409-14	5/8	15,9	10	M24-1.5	*16*	30	31
OL0409-15	5/8	15,9	10	M30-2	*20*	36	33
OL0409-16	3/4	19	12	M30-2	*20*	36	34
OL0409-17	3/4	19	12	M36-2	*25*	46	40
OL0409-18	1	25,4	16	M36-2	*25*	46	41
OL0409-19	1	25,4	16	M42-2	*30*	50	43
OL0409-20	1.1/4	31,8	20	M52-2	*38*	60	44
OL0409-21	1.1/2	38,1	24	M52-2	*38*	60	44

OL1030 Curva Metrica 90°cono 24°Serie Leggera


(DKOL 90°) 90° Metric Swept Elbow 24° Seat Light

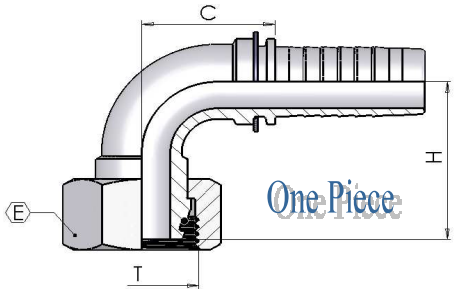

part number	hose I.D.		Dimension					
			dash	thread	*erm.*	hex	drop	cut-off
	in	mm	size	T		E	H	C
OL1030-01	3/16	4,8	03	M12-1.5	*6*	14	23	22
OL1030-02	1/4	6,4	04	M14-1.5	*8*	17	26	26
OL1030-03	1/4	6,4	04	M16-1.5	*10*	19	27	25
OL1030-04	1/4	6,4	04	M18-1.5	*12*	22	30	27
OL1030-05	5/16	7,9	05	M16-1.5	*10*	19	31	31
OL1030-06	5/16	7,9	05	M18-1.5	*12*	22	32	31
OL1030-07	3/8	9,5	06	M18-1.5	*12*	22	35	32
OL1030-08	3/8	9,5	06	M22-1.5	*15*	27	35	32
OL1030-09	1/2	12,7	08	M22-1.5	*15*	27	38	41
OL1030-10	5/8	15,9	10	M26-1.5	*18*	32	44	44
OL1030-11	3/4	19	12	M30-2	*22*	36	51	49
OL1030-12	1	25,4	16	M36-2	*28*	41	62	72

OL1031 Curva Metrica 90°cono 24°Serie Leggera (saldata)


(DKOL 90°) 90° Metric Swept Elbow 24° Seat Light (welded)

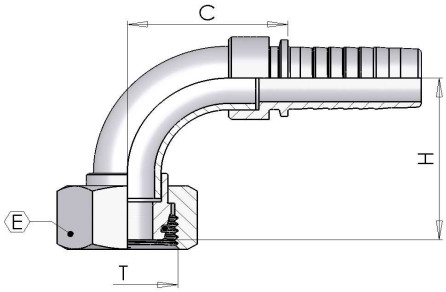

part number	hose I.D.		Dimension					
			dash	thread	*erm.*	hex	drop	cut-off
	in	mm	size	T		E	H	C
OL1031-01	1/2	12,7	08	M18-1.5	*12*	22	48	33
OL1031-02	1/2	12,7	08	M26-1.5	*18*	32	44	42
OL1031-03	3/4	19	12	M26-1.5	*18*	32	44	42
OL1031-04	3/4	19	12	M36-2	*28*	41	51	49
OL1031-05	1.1/4	31,8	20	M45-2	*35*	50	73	63
OL1031-06	1.1/2	38,1	24	M52-2	*42*	60	83	81

OL1032 Curva Metrica 90°Cono 24°Serie Leggera (dado rull ato)


(DKOL 90°) 90° Metric Swept Elbow 24° Seat Light (rolled nut)

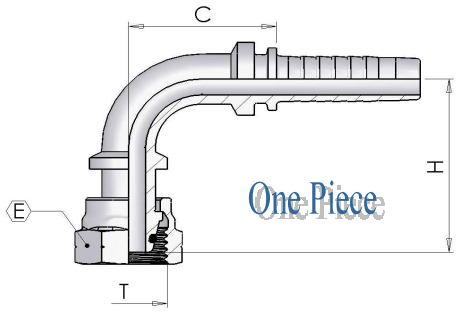

part number	hose I.D.		Dimension					
			dash	thread	*erm.*	hex	drop	cut-off
	in	mm	size	T		E	H	C
OL1032-01	1/4	6,4	04	M12-1.5	*6*	14	34	26
OL1032-02	5/16	7,9	05	M14-1.5	*8*	17	38	30
OL1032-03	3/8	9,5	06	M16-1.5	*10*	19	39	32

OL1040 Curva Metrica 90°cono 24°Serie Pesante

(DKOS 90°) 90° Metric Swept Elbow 24° Seat Heavy

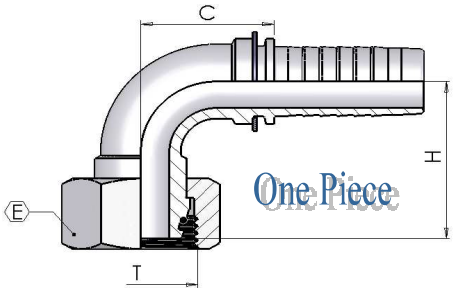


part number	hose I.D.		Dimension					
			dash	thread	*erm.*	hex	drop	cut-off
	in	mm	size	T		E	H	C
OL1040-01	3/16	4,8	03	M16-1.5	*8*	19	25	22
OL1040-02	1/4	6,4	04	M14-1.5	*6*	17	26	27
OL1040-03	1/4	6,4	04	M16-1.5	*8*	19	26	26
OL1040-04	1/4	6,4	04	M18-1.5	*10*	22	31	27
OL1040-05	1/4	6,4	04	M20-1.5	*12*	24	30	27
OL1040-06	5/16	7,9	05	M18-1.5	*10*	22	33	33
OL1040-07	5/16	7,9	05	M20-1.5	*12*	24	34	30
OL1040-08	3/8	9,5	06	M18-1.5	*10*	22	35	34
OL1040-09	3/8	9,5	06	M20-1.5	*12*	24	34	34
OL1040-10	3/8	9,5	06	M22-1.5	*14*	27	33	33
OL1040-11	1/2	12,7	08	M24-1.5	*16*	30	41	40
OL1040-12	5/8	15,9	10	M24-1.5	*16*	30	38	42
OL1040-13	5/8	15,9	10	M30-2	*20*	36	50	46
OL1040-14	3/4	19	12	M30-2	*20*	36	56	58
OL1040-15	3/4	19	12	M36-2	*25*	46	59	56
OL1040-16	1	25,4	16	M36-2	*25*	46	67	69
OL1040-17	1	25,4	16	M42-2	*30*	50	67	69
OL1040-18	1.1/4	31,8	20	M52-2	*38*	60	82	84
OL1040-19	1.1/2	38,1	24	M52-2	*38*	60	94	99

saldato/welded

OL1080 Curva Metrica 45° cono 24° Serie Leggera


(DKOL 45°) 45° Metric Swept Elbow 24° Seat Light

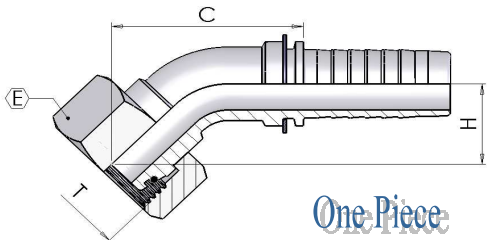

part number	hose I.D.		Dimension					
			dash	thread	*erm.*	hex	drop	cut-off
	in	mm	size	T		E	H	C
OL1080-01	3/16	4,8	03	M12-1.5	*6*	14	14	36
OL1080-02	1/4	6,4	04	M14-1.5	*8*	17	14	42
OL1080-03	1/4	6,4	04	M16-1.5	*10*	19	15	42
OL1080-04	1/4	6,4	04	M18-1.5	*12*	22	16	43
OL1080-05	5/16	7,9	05	M16-1.5	*10*	19	17	48
OL1080-06	5/16	7,9	05	M18-1.5	*12*	22	18	48
OL1080-07	3/8	9,5	06	M18-1.5	*12*	22	19	52
OL1080-08	3/8	9,5	06	M22-1.5	*15*	27	19	51
OL1080-09	1/2	12,7	08	M22-1.5	*15*	27	21	63
OL1080-10	5/8	15,9	10	M26-1.5	*18*	32	23	68
OL1080-11	3/4	19	12	M30-2	*22*	36	27	85
OL1080-12	1	25,4	16	M36-2	*28*	41	32	102

OL1081 Curva Metrica 45° Cono 24° Serie Leggera (saldata)


(DKOL 45°) 45° Metric Swept Elbow 24° Seat Light (welded)

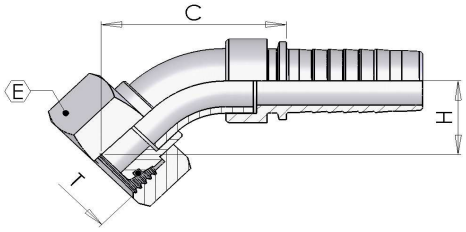

part number	hose I.D.		Dimension					
			dash	thread	*erm.*	hex	drop	cut-off
	in	mm	size	T		E	H	C
OL1081-01	1/2	12,7	08	M26-1.5	*18*	32	17	44
Dado rullato/Rolled Nut **OL1081-02**	3/4	19	12	M26-1.5	*18*	32	19	43
OL1081-03	1.1/4	31,8	20	M45-2	*35*	50	34	72
OL1081-04	1.1/2	38,1	24	M52-2	*42*	60	36	85

OL1082 Curva Metrica 45° Cono 24° Serie Leggera (dado rull ato)


(DKOL 45°) 45° Metric Swept Elbow 24° Seat Light (rolled nut)

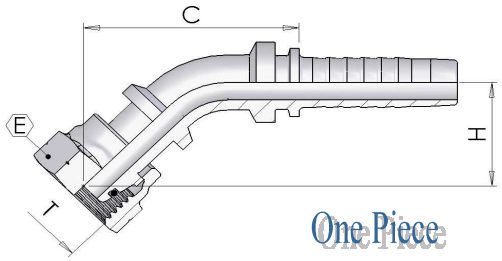

part number	hose I.D.		Dimension					
			dash	thread	*erm.*	hex	drop	cut-off
	in	mm	size	T		E	H	C
OL1082-01	1/4	6,4	04	M12-1.5	*6*	14	20	46
OL1082-02	3/8	9,5	06	M16-1.5	*10*	19	22	55

OL1090 Curva Metrica 45° cono 24° Serie Pesante


(DKOS 45°) 45° Metric Swept Elbow 24° Seat Heavy

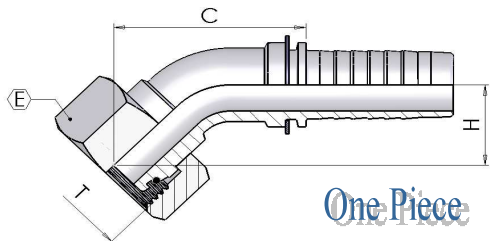

part number	hose I.D.		Dimension					
			dash	thread	*erm.*	hex	drop	cut-off
	in	mm	size	T		E	H	C
OL1090-01	3/16	4,8	03	M16-1.5	*8*	19	16	36
OL1090-02	1/4	6,4	04	M14-1.5	*6*	17	15	37
OL1090-03	1/4	6,4	04	M16-1.5	*8*	19	15	42
OL1090-04	1/4	6,4	04	M18-1.5	*10*	22	18	45
OL1090-05	5/16	7,9	05	M20-1.5	*12*	24	19	49
OL1090-06	3/8	9,5	06	M18-1.5	*10*	22	18	54
OL1090-07	3/8	9,5	06	M20-1.5	*12*	24	18	53
OL1090-08	3/8	9,5	06	M22-1.5	*14*	27	20	54
OL1090-09	1/2	12,7	08	M24-1.5	*16*	30	21	63
OL1090-10	5/8	15,9	10	M30-2	*20*	36	29	74
OL1090-11	3/4	19	12	M30-2	*20*	36	30	87
OL1090-12	3/4	19	12	M36-2	*25*	46	31	74
OL1090-13	1	25,4	16	M36-2	*25*	46	34	105
OL1090-14	1	25,4	16	M42-2	*30*	50	33	82
OL1090-15	1.1/4	31,8	20	M52-2	*38*	60	39	105
OL1090-16	1.1/2	38,1	24	M52-2	*38*	60	44	150

OL0805 Occhio a Pressare Metrico


(RNM) Metric Banjo

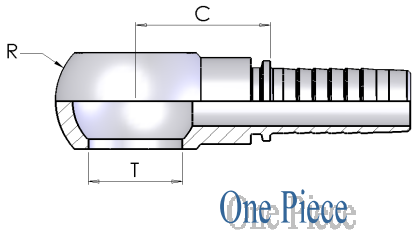

part number	hose I.D.		Dimension				
			dash	hole			cut-off
	in	mm	size	T	mm	R	C
OL0805-01	3/16	4,8	03	M10-1	10,2	17	19
OL0805-02	3/16	4,8	03	M12-1.5	12,2	20	21
OL0805-03	1/4	6,4	04	M10-1	10,2	17	25
OL0805-04	1/4	6,4	04	M12-1.5	12,2	20	22
OL0805-05	1/4	6,4	04	M14-1.5	14,2	24	25
OL0805-06	5/16	7,9	05	M14-1.5	14,2	24	25
OL0805-07	5/16	7,9	05	M16-1.5	16,2	28	31
OL0805-08	5/16	7,9	05	M18-1.5	18,2	32	29
OL0805-09	3/8	9,5	06	M14-1.5	14,2	24	25
OL0805-10	3/8	9,5	06	M16-1.5	16,2	28	31
OL0805-11	3/8	9,5	06	M18-1.5	18,2	32	29
OL0805-12	3/8	9,5	06	M22-1.5	22,2	36	31
OL0805-13	1/2	12,7	08	M16-1.5	16,2	28	30
OL0805-14	1/2	12,7	08	M18-1.5	18,2	32	29
OL0805-15	1/2	12,7	08	M22-1.5	22,2	36	31
OL0805-16	5/8	15,9	10	M22-1.5	22,2	36	31
OL0805-17	5/8	15,9	10	M26-1.5	26,2	45	38
OL0805-18	3/4	19	12	M22-1.5	22,2	36	32
OL0805-19	3/4	19	12	M26-1.5	26,2	45	38
OL0805-20	1	25,4	16	M30-1.5	30,2	54	45

OL0830 Maschio Metrico Svas.24° Serie Francese


(CEF) Metric Male 24° Cone French Type

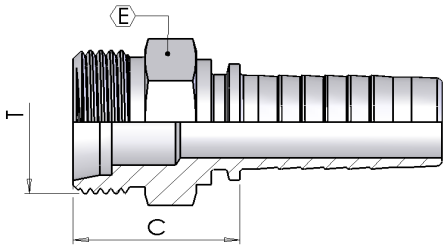

part number	hose I.D.		Dimension				
			dash	*erm.*	thread	hex	cut-off
	in	mm	size		T	E	C
OL0830-01	5/16	7,9	05	*12,00*	M18-1.5	19	26
OL0830-02	5/16	7,9	05	*13,25*	M20-1.5	22	26
OL0830-03	3/8	9,5	06	*13,25*	M20-1.5	22	26
OL0830-04	1/2	12,7	08	*16,75*	M24-1.5	24	28
OL0830-05	5/8	15,9	10	*21,25*	M30-1.5	32	31
OL0830-06	3/4	19	12	*21,25*	M30-1.5	32	32
OL0830-07	3/4	19	12	*26,75*	M36-1.5	36	33
OL0830-08	1	25,4	16	*33,50*	M45-1.5	46	38
OL0830-09	1.1/4	31,8	20		M52-1.5	55	41

OL0840 Estremità Tubolare Diritta Serie Francese


(BEF) Metric Standpipe French Type

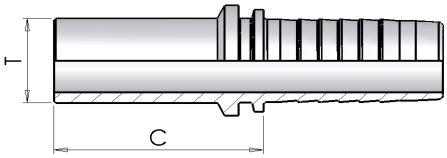

part number	hose I.D.		Dimension			
			dash	pipe		cut-off
	in	mm	size	T		C
OL0840-01	5/16	7,9	05	13,25		35
OL0840-02	3/8	9,5	06	13,25		37
OL0840-03	1/2	12,7	08	16,75		41
OL0840-04	5/8	15,9	10	21,25		40
OL0840-05	3/4	19	12	26,75		42
OL0840-06	1	25,4	16	33,50		43

OL0410 Femmina Metrica Cono 24° Serie Francese


(DKF) Metric Female 24° Cone French Type

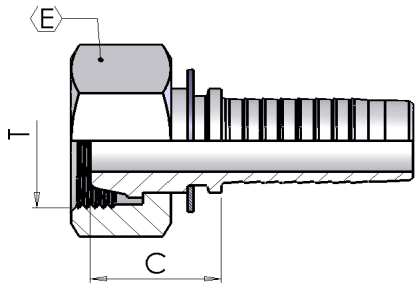

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0410-01	5/16	7,9	05	M20-1.5	24	25
OL0410-02	3/8	9,5	06	M20-1.5	24	26
OL0410-03	1/2	12,7	08	M24-1.5	30	28
OL0410-04	5/8	15,9	10	M30-1.5	36	25
OL0410-05	3/4	19	12	M30-1.5	36	26
OL0410-06	3/4	19	12	M36-1.5	46	29
OL0410-07	1	25,4	16	M45-1.5	55	30
OL0410-08	1.1/4	31,8	20	M52-1.5	65	34

OL0651 Curva Metrica 90° Cono 24° Serie Francese


(DKF 90°) 90° Metric Swept Elbow 24° Cone French Type

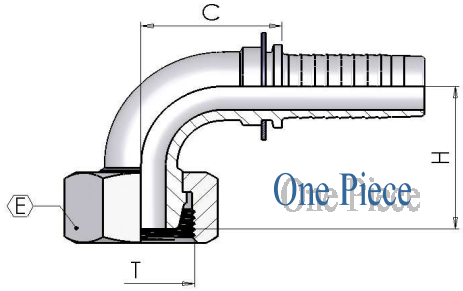

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0651-01	5/16	7,9	05	M20-1.5	24	35	29
OL0651-02	3/8	9,5	06	M20-1.5	24	35	33
OL0651-03	1/2	12,7	08	M24-1.5	30	40	43
OL0651-04	3/4	19	12	M36-1.5	46	55	56
saldato/welded **OL0651-05**	5/8	15,9	10	M30-1.5	36	49	48

OL1100 Femmina Metrica Tubolare Diritta

(BEL-BES) Metric Standpipe

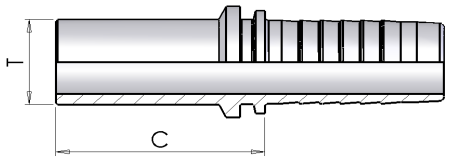


part number	hose I.D.		Dimension			
			dash	pipe	type	cut-off
	in	mm	size	T		C
OL1100-01	3/16	4,8	03	6	L/S	30
OL1100-02	3/16	4,8	03	8	L/S	29
OL1100-03	1/4	6,4	04	6	L/S	32
OL1100-04	1/4	6,4	04	8	L/S	30
OL1100-05	1/4	6,4	04	10	L/S	33
OL1100-06	1/4	6,4	04	12	L/S	30
OL1100-07	5/16	7,9	05	08	L/S	31
OL1100-08	5/16	7,9	05	10	L/S	31
OL1100-09	5/16	7,9	05	12	L/S	33
OL1100-10	3/8	9,5	06	08	L/S	33
OL1100-11	3/8	9,5	06	10	L/S	33
OL1100-12	3/8	9,5	06	12	L/S	32
OL1100-13	3/8	9,5	06	14	S	37
OL1100-14	3/8	9,5	06	15	L	32
OL1100-15	1/2	12,7	08	12	L/S	36
OL1100-16	1/2	12,7	08	14	S	39
OL1100-17	1/2	12,7	08	15	L	34
OL1100-18	1/2	12,7	08	16	S	39
OL1100-19	1/2	12,7	08	18	L	35
OL1100-20	1/2	12,7	08	20	S	45
OL1100-21	5/8	15,9	10	18	L	35
OL1100-22	5/8	15,9	10	20	S	45
OL1100-23	5/8	15,9	10	22	L	33
OL1100-24	3/4	19	12	18	L	37
OL1100-25	3/4	19	12	20	S	46
OL1100-26	3/4	19	12	22	L	38
OL1100-27	3/4	19	12	25	S	49
OL1100-28	3/4	19	12	28	L	40
OL1100-29	1	25,4	16	25	S	51
OL1100-30	1	25,4	16	28	L	41
OL1100-31	1	25,4	16	30	S	54
OL1100-32	1	25,4	16	38	S	60
OL1100-33	1.1/4	31,8	20	30	S	58
OL1100-34	1.1/4	31,8	20	35	L	48
OL1100-35	1.1/4	31,8	20	38	S	62
OL1100-36	1.1/2	38,1	24	38	S	63
OL1100-37	1.1/2	38,1	24	42	L	50

Inserto standard / Standard tail

OL1200 Femm. Metrica Tubolare 90°

(BEL-BES 90°)

90° Metric Standpipe

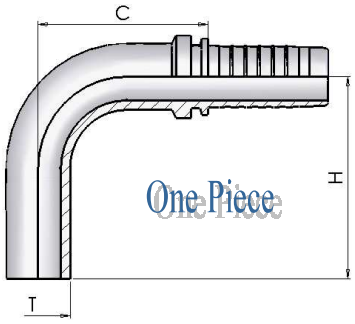


part number	hose I.D.		Dimension				
			dash	pipe	type	drop	cut-off
	in	mm	size	T		H	C
OL1200-01	1/4	6,4	04	6	L/S	32	23
OL1200-02	1/4	6,4	04	8	L/S	34	25
OL1200-03	1/4	6,4	04	10	L/S	43	25
OL1200-04	5/16	7,9	05	10	L/S	40	29
OL1200-05	5/16	7,9	05	12	L/S	45	29
OL1200-06	3/8	9,5	06	10	L/S	40	27
OL1200-07	3/8	9,5	06	12	L/S	44	30

OL1201 Femmina Metrica Tubolare 90° (saldata)

(BEL-BES 90°)

90° Metric Standpipe (welded)

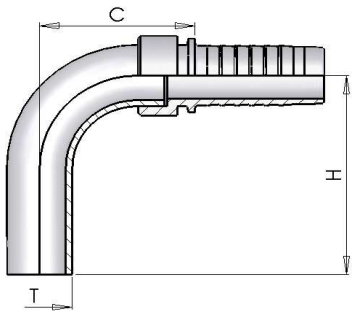


part number	hose I.D.		Dimension				
			dash	pipe	type	drop	cut-off
	in	mm	size	T		H	C
OL1201-01	3/16	4,8	03	6	L/S	37	24
OL1201-02	3/16	4,8	03	8	L/S	41	25
OL1201-03	1/4	6,4	04	12	L/S	44	35
OL1201-04	5/16	7,9	05	8	L/S	41	27
OL1201-05	3/8	9,5	06	14	S	46	36
OL1201-06	3/8	9,5	06	15	L	52	39
OL1201-07	1/2	12,7	08	12	L/S	44	33
OL1201-08	1/2	12,7	08	14	S	46	36
OL1201-09	1/2	12,7	08	15	L	52	39
OL1201-10	1/2	12,7	08	16	S	56	42
OL1201-11	1/2	12,7	08	18	L	56	42
OL1201-12	5/8	15,9	10	18	L	56	42
OL1201-13	5/8	15,9	10	20	S	65	48
OL1201-14	5/8	15,9	10	22	L	71	51
OL1201-15	3/4	19	12	20	S	65	48
OL1201-16	3/4	19	12	22	L	71	51
OL1201-17	3/4	19	12	25	S	75	57
OL1201-18	1	25,4	16	25	S	75	57
OL1201-19	1	25,4	16	28	L	89	60
OL1201-20	1	25,4	16	30	S	89	65
OL1201-21	1.1/4	31,8	20	30	S	89	66
OL1201-22	1.1/4	31,8	20	35	L	98	76
OL1201-23	1.1/4	31,8	20	38	S	102	83
OL1201-24	1.1/2	38,1	24	38	S	102	82
OL1201-25	1.1/2	38,1	24	42	L	125	106

Inserto standard / Standard tail

OL0612 Femm. Metrica Tubolare 45°

(BEL-BES 45°)

45° Metric Standpipe

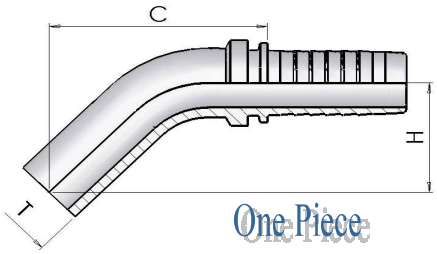


part number	hose I.D.		Dimension				
			dash	pipe	type	drop	cut-off
	in	mm	size	T		H	C
OL0612-01	1/4	6,4	04	6	L/S	24	41
OL0612-02	1/4	6,4	04	8	L/S	25	43
OL0612-03	1/4	6,4	04	10	L/S	30	47
OL0612-04	5/16	7,9	05	10	L/S	30	49
OL0612-05	5/16	7,9	05	12	L/S	32	53
OL0612-06	3/8	9,5	06	10	L/S	33	50
OL0612-07	3/8	9,5	06	12	L/S	33	52

OL0622 Femm. Metrica Tubolare 45° (saldata)

(BEL-BES 45°)

45° Metric Standpipe (welded)

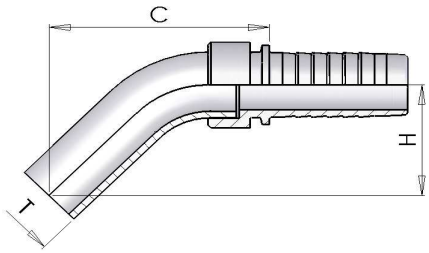


part number	hose I.D.		Dimension				
			dash	pipe	type	drop	cut-off
	in	mm	size	T		H	C
OL0622-01	3/16	4,8	03	6	L/S	21	38
OL0622-02	3/16	4,8	03	8	L/S	23	41
OL0622-03	1/4	6,4	04	12	L/S	29	54
OL0622-04	3/8	9,5	06	14	S	27	50
OL0622-05	3/8	9,5	06	15	L	29	54
OL0622-06	1/2	12,7	08	14	S	27	50
OL0622-07	1/2	12,7	08	15	L	29	55
OL0622-08	1/2	12,7	08	16	S	27	54
OL0622-09	1/2	12,7	08	18	L	29	56
OL0622-10	5/8	15,9	10	18	L	29	56
OL0622-11	5/8	15,9	10	20	S	34	56
OL0622-12	5/8	15,9	10	22	L	35	66
OL0622-13	3/4	19	12	20	S	34	63
OL0622-14	3/4	19	12	22	L	35	65
OL0622-15	3/4	19	12	25	S	41	76
OL0622-16	1	25,4	16	25	S	41	76
OL0622-17	1	25,4	16	28	L	49	84
OL0622-18	1	25,4	16	30	S	44	86
OL0622-19	1.1/4	31,8	20	30	S	44	88
OL0622-20	1.1/4	31,8	20	35	L	47	94
OL0622-21	1.1/4	31,8	20	38	S	50	101
OL0622-22	1.1/2	38,1	24	38	S	50	100
OL0622-23	1.1/2	38,1	24	42	L	55	114

Inserto standard / Standard tail

OL0420 Femmina Tipo 'K' per Idropulitrici


'K' Female

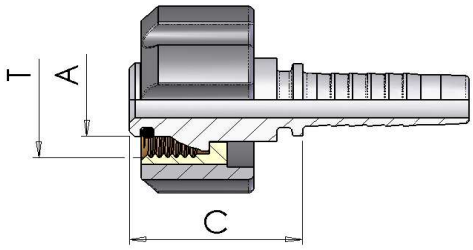

part number	hose I.D.		Dimension			
			dash	thread		cut-off
	in	mm	size	T	A	C
OL0420-01	1/4	6,4	04	M22-1.5	14	31
OL0420-02	5/16	7,9	05	M22-1.5	14	31
OL0420-03	3/8	9,5	06	M22-1.5	14	31

OL0806 Inserti Tipo 'K' (per lancia)


'K' Male (for gun)

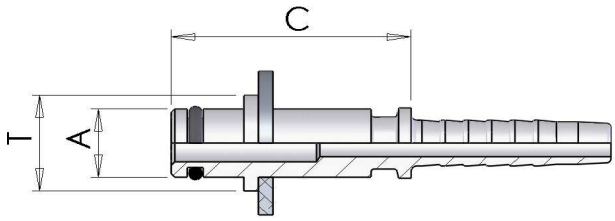

part number	hose I.D.		Dimension			
			dash	thread		cut-off
	in	mm	size	T	A	C
OL0806-01	1/4	6,4	04	M22-1.5	10	33
OL0806-02	5/16	7,9	05	M22-1.5	10	33
OL0806-03	3/8	9,5	06	M22-1.5	10	33
OL0806-04	1/4	6,4	04	M22-1.5	11	33
OL0806-05	5/16	7,9	05	M22-1.5	11	33
OL0806-06	3/8	9,5	06	M22-1.5	11	33

OL0815 Maschio Steko

(STN) Staplelock Male

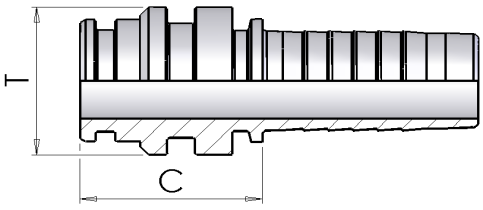


secondo / according to:
SAE J1467

part number	hose I.D.		Dimension			
			dash	head		cut-off
	in	mm	size	T		C
OL0815-01	1/4	6,4	4	1/4		32
OL0815-02	3/8	9,5	06	3/8		35
OL0815-03	1/2	12,7	08	1/2		33
OL0815-04	5/8	15,9	10	5/8		33
OL0815-05	3/4	19	12	3/4		33
OL0815-06	1	25,4	16	1		39
OL0815-07	1.1/4	31,8	20	1.1/4		41

OL0835 Maschio KOB


(KOB) KOB Male

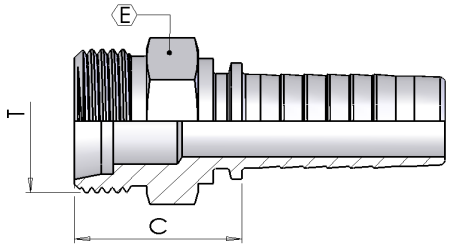

part number	hose I.D.		Dimension				
			dash	thread	tube	hex	cut-off
	in	mm	size	T		E	C
OL0835-01	5/8	15,9	10	M30-1.5	22	32	32
OL0835-02	3/4	19	12	M30-1.5	22	32	35
OL0835-03	3/4	19	12	M36-1.5	28	41	36
OL0835-04	1	25,4	16	M36-1.5	28	41	37
OL0835-05	1	25,4	16	M45-1,5	35	50	38

OL0845 Maschio Metrico per valvole agricole

(CGM) Metric Male For Agricultural Valves

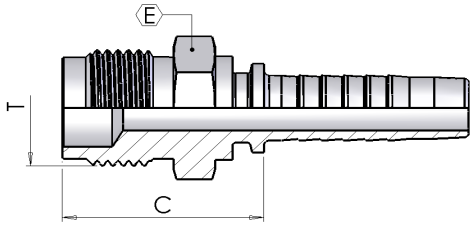


part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0845-01	1/4	6,4	04	M18-1.5	19	29
OL0845-02	5/16	7,9	05	M18-1.5	19	29
OL0845-03	3/8	9,5	06	M18-1.5	19	29

Inserto standard / Standard tail

OL0810 Maschio ORFS

(ORFS) ORFS Male

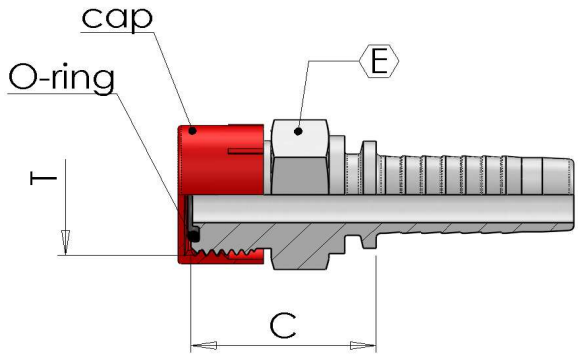


- con tappo ed O-Ring
- *with cap and O-Ring*

part number	hose I.D.		Dimension			
			dash	thread	hex	cut-off
	in	mm	size	T	E	C
OL0810-01	1/4	6,4	04	9/16-18	17	23
OL0810-02	1/4	6,4	04	11/16-16	19	21
OL0810-03	5/16	7,9	05	11/16-16	19	26
OL0810-04	3/8	9,5	06	11/16-16	19	26
OL0810-05	3/8	9,5	6	13/16-16	22	29
OL0810-06	1/2	12,7	08	13/16-16	22	29
OL0810-07	1/2	12,7	08	1-14	27	34
OL0810-08	1/2	12,7	08	1.3/16-12	32	35
OL0810-09	5/8	15,9	10	1-14	27	33
OL0810-10	5/8	15,9	10	1.3/16-12	32	35
OL0810-11	3/4	19	12	1.3/16-12	32	36
OL0810-12	3/4	19	12	1.7/16-12	38	36
OL0810-13	1	25,4	16	1.7/16-12	38	37
OL0810-14	1	25,4	16	1.11/16-12	46	38
OL0810-15	1.1/4	31,8	20	1.11/16-12	46	39

OL0430 Femmina ORFS


(ORFS) ORFS Female

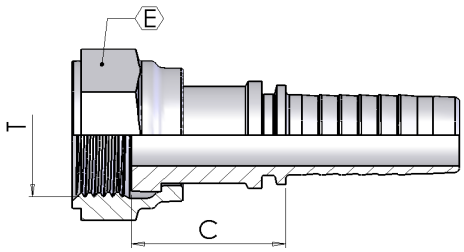

	part number	hose I.D.		Dimension			
				dash	thread	hex	cut-off
		in	mm	size	T	E	C
	OL0430-01	1/4	6,4	04	9/16-18	19	25
	OL0430-02	1/4	6,4	04	11/16-16	22	29
	OL0430-03	1/4	6,4	04	13/16-16	24	32
	OL0430-04	5/16	7,9	05	11/16-16	22	29
	OL0430-05	3/8	9,5	06	11/16-16	22	29
	OL0430-06	3/8	9,5	06	13/16-16	24	30
	OL0430-07	1/2	12,7	08	13/16-16	24	32
	OL0430-08	1/2	12,7	08	1-14	30	35
	OL0430-09	1/2	12,7	08	1.3/16-12	36	37
	OL0430-10	5/8	15,9	10	1-14	30	35
	OL0430-11	5/8	15,9	10	1.3/16-12	36	34
	OL0430-12	3/4	19	12	1-14	30	37
	OL0430-13	3/4	19	12	1.3/16-12	36	35
	OL0430-14	3/4	19	12	1.7/16-12	41	41
	OL0430-15	1	25,4	16	1.7/16-12	41	39
Slip On Nut	**OL0430-16**	1.1/4	31,8	20	1.11/16-12	50	40
Slip On Nut	**OL0430-17**	1.1/2	38,1	24	2-12	60	41

OL0431 Femmina ORFS doppio esagono


(ORFS) ORFS Female Back Hexagon

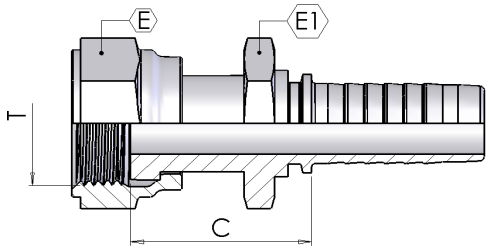

part number	hose I.D.		Dimension				
			dash	thread	hex		cut-off
	in	mm	size	T	E	E1	C
OL0431-01	1/4	6,4	04	9/16-18	19	15	30
OL0431-02	3/8	9,5	06	11/16-16	22	17	34
OL0431-03	1/2	12,7	08	13/16-16	24	19	37
OL0431-04	5/8	15,9	10	1-14	30	24	41
OL0431-05	3/4	19	12	1.3/16-12	36	30	42
OL0431-06	1	25,4	16	1.7/16-12	41	36	50

OL0652 Curva ORFS 90°


(ORFS 90°) ORFS 90° Swept Elbow

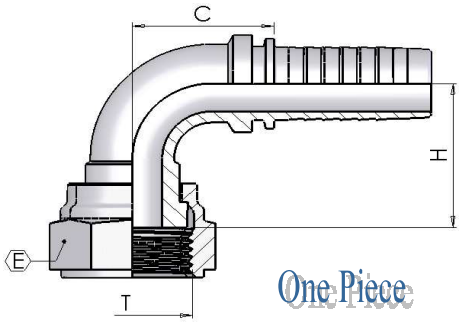

	part number	hose I.D.		Dimension				
				dash	thread	hex	drop	cut-off
		in	mm	size	T	E	H	C
	OL0652-01	1/4	6,4	04	9/16-18	19	26	25
	OL0652-02	1/4	6,4	04	11/16-16	22	23	25
	OL0652-03	5/16	7,9	05	11/16-16	22	32	29
	OL0652-04	3/8	9,5	06	11/16-16	22	33	33
	OL0652-05	3/8	9,5	06	13/16-16	24	32	33
	OL0652-06	1/2	12,7	08	13/16-16	24	36	39
	OL0652-07	1/2	12,7	08	1-14	30	40	39
	OL0652-08	1/2	12,7	08	1.3/16-12	36	39	42
	OL0652-09	5/8	15,9	10	1-14	30	39	47
saldato/welded	**OL0652-10**	5/8	15,9	10	1.3/16-12	36	39	42
saldato/welded	**OL0652-11**	3/4	19	12	1-14	30	39	42
	OL0652-12	3/4	19	12	1.3/16-12	36	49	57
	OL0652-13	3/4	19	12	1.7/16-12	41	51	56
	OL0652-14	1	25,4	16	1.7/16-12	41	62	67
saldato/welded	**OL0652-15**	1	25,4	20	1.11/16-12	50	58	62
saldato/welded	**OL0652-16**	1.1/4	31,8	20	1.11/16-12	50	58	63
saldato/welded	**OL0652-17**	1.1/2	38,1	24	2-12	60	73	80

OL0613 Curva ORFS 45°


(ORFS 45°) ORFS 45° Swept Elbow

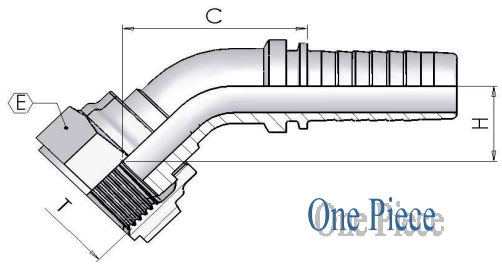

	part number	hose I.D.		Dimension				
				dash	thread	hex	drop	cut-off
		in	mm	size	T	E	H	C
	OL0613-01	1/4	6,4	04	9/16-18	19	14	40
	OL0613-02	1/4	6,4	04	11/16-16	22	14	38
	OL0613-03	5/16	7,9	05	11/16-16	22	14	44
	OL0613-04	3/8	9,5	06	11/16-16	22	17	52
	OL0613-05	3/8	9,5	06	13/16-16	24	18	51
	OL0613-06	1/2	12,7	08	13/16-16	24	20	62
	OL0613-07	1/2	12,7	08	1-14	30	23	64
	OL0613-08	1/2	12,7	08	1.3/16-12	36	23	62
	OL0613-09	5/8	15,9	10	1-14	30	22	67
saldato/welded	**OL0613-10**	5/8	15,9	10	1.3/16-12	36	18	44
saldato/welded	**OL0613-11**	3/4	19	12	1-14	30	15	40
	OL0613-12	3/4	19	12	1.3/16-12	36	23	84
	OL0613-13	3/4	19	12	1.7/16-12	41	26	84
	OL0613-14	1	25,4	16	1.7/16-12	41	31	100
saldato/welded	**OL0613-15**	1.1/4	31,8	20	1.11/16-12	50	44	125
saldato/welded	**OL0613-16**	1.1/2	38,1	24	2-12	60	29	78

OL0441 Femmina JIS cono 60° "N"


(JIS-N) JIS Female 60° cone "N"

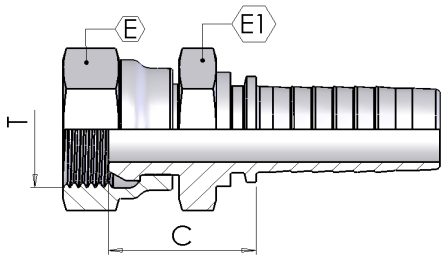

part number	hose I.D.		Dimension				
			dash	thread	hex		cut-off
	in	mm	size	T	E	E1	C
OL0441-01	1/4	6,4	04	1/4-19	19	19	23
OL0441-02	3/8	9,5	06	3/8-19	22	22	28
OL0441-03	1/2	12,7	08	1/2-14	27	27	27
OL0441-04	3/4	19	12	3/4-14	32	32	29
OL0441-05	1	25,4	16	1-11	38	38	31

OL0440 Femmina JIS cono 60° "T"


(JIS-T) JIS Female 60° cone "T"

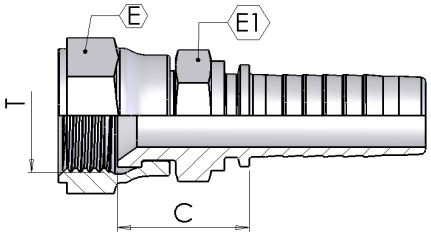

part number	hose I.D.		Dimension				
			dash	thread	hex		cut-off
	in	mm	size	T	E	E1	C
OL0440-01	1/4	6,4	04	1/4-19	19	17	20
OL0440-02	3/8	9,5	06	3/8-19	22	19	22
OL0440-03	1/2	12,7	08	1/2-14	27	22	26
OL0440-04	3/4	19	12	3/4-14	32	30	29
OL0440-05	1	25,4	16	1-11	38	36	31
OL0440-06	1,1/4	31,8	20	1,1/4-11	50	46	35
OL0440-07	1,1/2	38,1	24	1,1/2-11	55	50	28

OL0653 Curva JIS 90°"T" - saldata


(JIS-T 90°) 90° JIS Swept Elbow "T" - welded

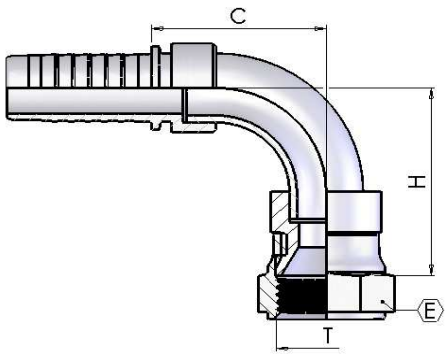

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0653-01	1/4	6,4	04	1/4-19	19	35	38
OL0653-02	3/8	9,5	06	3/8-19	22	30	27
OL0653-03	1/2	12,7	08	1/2-14	27	39	33
OL0653-04	3/4	19	12	3/4-14	32	55	48
OL0653-05	1	25,4	16	1-11	38	62	57
OL0653-06	1,1/4	31,8	20	1,1/4-11	50	65	63
OL0653-07	1,1/2	38,1	24	1,1/2-11	55	83	80

OL0609 Curva JIS 45°"T" - saldata

(JIS-T 45°) 45° JIS Swept Elbow "T" - welded

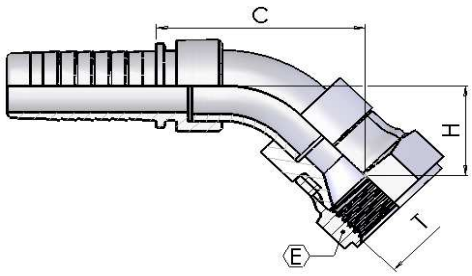


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0609-01	1/4	6,4	04	1/4-19	19	18	44
OL0609-02	5/16	7,9	05	3/8-19	22	18	38
OL0609-03	3/8	9,5	06	3/8-19	22	18	38
OL0609-04	1/2	12,7	08	1/2-14	27	20	40
OL0609-05	3/4	19	12	3/4-14	32	26	56
OL0609-06	1	25,4	16	1-11	38	33	72
OL0609-07	1,1/4	31,8	20	1,1/4-11	50	29	67
OL0609-08	1,1/2	38,1	24	1,1/2-11	55	36	85

OL0442 Femmina JIS Cono 60° "K"

(JIS-K)

JIS Female 60° Cone "K"

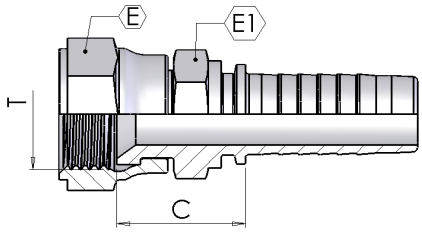


part number	hose I.D.		Dimension				
			dash	thread	hex		cut-off
	in	mm	size	T	E	E1	C
OL0442-01	1/4	6,4	04	M14x1,5	19	17	22
OL0442-02	5/16	7,9	05	M16x1,5	22	17	22
OL0442-03	3/8	9,5	06	M14x1,5	19	17	22
OL0442-04	3/8	9,5	06	M18x1,5	24	19	21
OL0442-05	1/2	12,7	08	M22x1,5	27	22	27
OL0442-06	5/8	15,9	10	M24x1,5	30	27	26
OL0442-07	3/4	19	12	M30x1,5	36	30	30
OL0442-08	1	25,4	16	M33x1,5	41	36	33
OL0442-09	1.1/4	31,8	20	M36x1,5	46	46	37
OL0442-10	1.1/2	38,1	24	M42x1,5	50	50	38

OL0654 Curva 90° JIS Cono 60° "K" - saldata

(JIS-K 90°)

90° JIS Swept Elbow "K" - welded

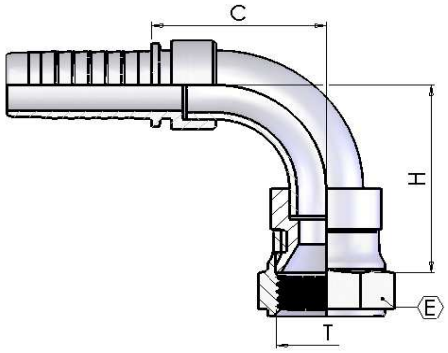


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0654-01	1/4	6,4	04	M14x1,5	19	35	38
OL0654-02	5/16	7,9	05	M16x1,5	22	30	27
OL0654-03	3/8	9,5	06	M14x1,5	19	33	31
OL0654-04	3/8	9,5	06	M18x1,5	24	33	31
OL0654-05	1/2	12,7	08	M22x1,5	27	39	33
OL0654-06	5/8	15,9	10	M24x1,5	30	48	42
OL0654-07	3/4	19	12	M30x1,5	36	43	48
OL0654-08	1	25,4	16	M33x1,5	41	62	57

OL0610 Curva 45°JIS Cono 60°"K" - saldata

(JIS-K 45°)

45°JIS Swept Elbow "K" - welded

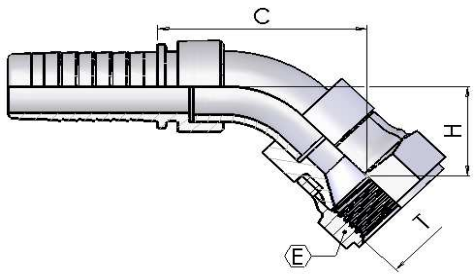


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
OL0610-01	1/4	6,4	04	M14x1,5	19	18	44
OL0610-02	5/16	7,9	05	M16x1,5	22	18	38
OL0610-03	3/8	9,5	06	M14x1,5	19	18	41
OL0610-04	3/8	9,5	06	M18x1,5	24	18	43
OL0610-05	1/2	12,7	08	M22x1,5	27	20	40
OL0610-06	5/8	15,9	10	M24x1,5	30	23	50
OL0610-07	3/4	19	12	M30x1,5	36	26	56
OL0610-08	1	25,4	16	M33x1,5	41	33	65

OL0820 Flangia "K" Diritta

(JIS-KF)

"K" Flange - Straight

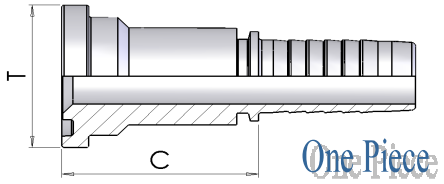


part number	hose I.D.		Dimension			
			dash	flangia		cut-off
	in	mm	size	T	mm	C
OL0820-01	5/8	15,9	10	5/8	34	56

OL0655 Flangia "K" 90°

(JIS-KF 90°)

"K" Flange - 90°

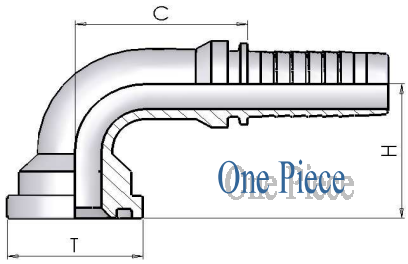


part number	hose I.D.		Dimension				
			dash	flangia		drop	cut-off
	in	mm	size	T	mm	H	C
OL0655-01	5/8	15,9	10	5/8	34	47	48

OL0611 Flangia "K" 45°

(JIS-KF 45°)


"K" Flange - 45°

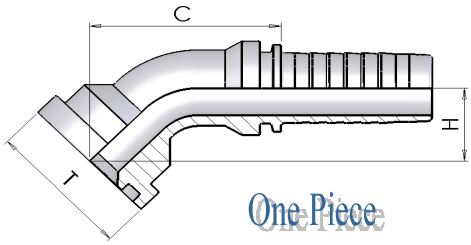

part number	hose I.D.		Dimension				
			dash	flangia		drop	cut-off
	in	mm	size	T	mm	H	C
OL0611-01	5/8	15,9	10	5/8	34	54	23

OL1600 Flangia Diritta SAE 3000 PSI


(SFL) Straight SAE Flange 3000 PSI

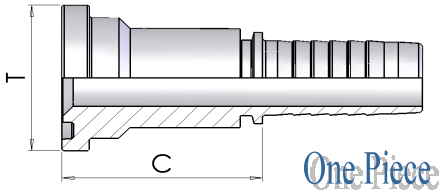

part number	hose I.D.		Dimension			
			dash	flangia		cut-off
	in	mm	size	T	mm	C
OL1600-01	1/2	12,7	08	1/2	30,2	45
OL1600-02	1/2	12,7	08	3/4	38.1	50
OL1600-03	5/8	15,9	10	1/2	30,2	45
OL1600-04	5/8	15,9	10	3/4	38.1	49
OL1600-05	3/4	19	12	3/4	38.1	50
OL1600-06	3/4	19	12	1	44.5	53
OL1600-07	1	25,4	16	1	44.5	54
OL1600-08	1	25,4	16	1.1/4	50.8	57
OL1600-09	1.1/4	31,8	20	1.1/4	50.8	59
OL1600-10	1.1/4	31,8	20	1.1/2	60.3	62
OL1600-11	1.1/2	38,1	24	1.1/2	60.3	62
OL1600-12	1.1/2	38,1	24	2	71.4	67
OL1600-13	2	50,8	32	2	71.4	68
OL1600-14	2	50,8	32	2.1/2	84.1	76
OL1600-15	2.1/2	63,5	40	2.1/2	84,1	76
OL1600-16	3	76,2	48	3	101,6	63

OL1400 Flangia 90°SAE 3000 PSI

(SFL 90°) 90°SAE Flange 3000 PSI

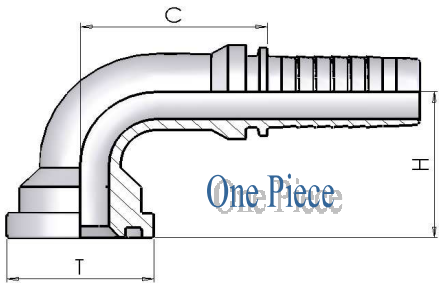


part number	hose I.D.		Dimension				
			dash	flangia		drop	cut-off
	in	mm	size	T	mm	H	C
OL1400-01	1/2	12,7	08	1/2	30,2	39	39
OL1400-02	1/2	12,7	08	3/4	38.1	44	39
OL1400-03	5/8	15,9	10	1/2	30,2	42	45
OL1400-04	5/8	15,9	10	3/4	38.1	47	45
OL1400-05	3/4	19	12	3/4	38.1	53	56
OL1400-06	3/4	19	12	1	44.5	58	56
OL1400-07	1	25,4	16	1	44.5	65	70
OL1400-08	1	25,4	16	1.1/4	50.8	70	70
OL1400-09	1	25,4	16	1.1/2	60.3	71	72
OL1400-10	1.1/4	31,8	20	1.1/4	50.8	77	86
OL1400-11	1.1/4	31,8	20	1.1/2	60.3	81	85
OL1400-12	1.1/2	38,1	24	1.1/2	60.3	89	98
OL1400-13	1.1/2	38,1	24	2	71.4	97	93
OL1400-14	2	50,8	32	2	71.4	121	123

Inserto standard / Standard tail

OL1500 Flangia 45° SAE 3000 PSI


(SFL 45°) 45° SAE Flange 3000 PSI

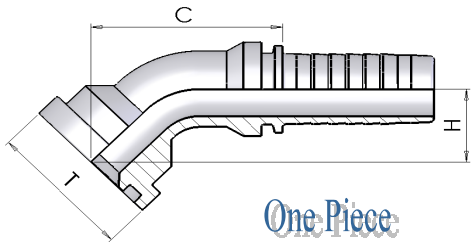

part number	hose I.D.		Dimension				
			dash	flange		drop	cut-off
	in	mm	size	T	mm	H	C
OL1500-01	1/2	12,7	08	1/2	30,2	22	62
OL1500-02	1/2	12,7	08	3/4	38.1	25	67
OL1500-03	3/4	19	12	3/4	38.1	27	69
OL1500-04	3/4	19	12	1	44.5	30	88
OL1500-05	1	25,4	16	1	44.5	33	82
OL1500-06	1	25,4	16	1.1/4	50.8	37	108
OL1500-07	1.1/4	31,8	20	1.1/4	50.8	38	102
OL1500-08	1.1/4	31,8	20	1.1/2	60.3	39	129
OL1500-09	1.1/2	38,1	24	1.1/2	60.3	45	113
OL1500-10	1.1/2	38,1	24	2	71.4	47	148
OL1500-11	2	50,8	32	2	71.4	58	130

OL1505 Flangia 22.5°30°60°67.5° SAE 3000 PSI


22.5°30°60°67.5° SAE Flange 3000 PSI

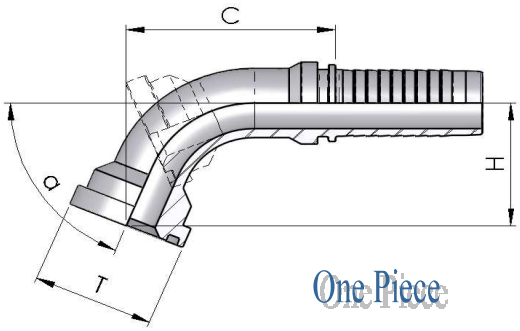

	part number	hose I.D.		Dimension					
				dash	flange		degrees	drop	cut-off
		in	mm	size	T	mm	α	H	C
(SFL 22.5°)	OL1505-01	3/4	19	12	3/4	38.1		11	76
	OL1505-02	1	25,4	16	1	44.5		14	89
	OL1505-03	1.1/4	31,8	20	1.1/4	50.8	22.5°	14	111
	OL1505-04	1.1/2	38,1	24	1.1/2	60.3		17	124
	OL1505-05	2	50,8	32	2	71.4		28	144
(SFL 30°)	OL1505-06	3/4	19	12	3/4	38.1		16	75
	OL1505-07	1	25,4	16	1	44.5		19	87
	OL1505-08	1.1/4	31,8	20	1.1/4	50.8	30°	26	109
	OL1505-09	1.1/2	38,1	24	1.1/2	60.3		23	122
	OL1505-10	2	50,8	32	2	71.4		35	142
(SFL 60°)	OL1505-11	3/4	19	12	3/4	38.1		36	76
	OL1505-12	1	25,4	16	1	44.5		43	95
	OL1505-13	1.1/4	31,8	20	1.1/4	50.8	60°	49	116
	OL1505-14	1.1/2	38,1	24	1.1/2	60.3		55	138
	OL1505-15	2	50,8	32	2	71.4		80	170
(SFL 67.5°)	OL1505-16	3/4	19	12	3/4	38.1		41	72
	OL1505-17	1	25,4	16	1	44.5		48	91
	OL1505-18	1.1/4	31,8	20	1.1/4	50.8	67.5°	56	110
	OL1505-19	1.1/2	38,1	24	1.1/2	60.3		63	131
	OL1505-20	2	50,8	32	2	71.4		92	158

OL1650 Flangia Diritta SAE 6000 PSI


(SFS) Straight SAE Flange 6000 PSI

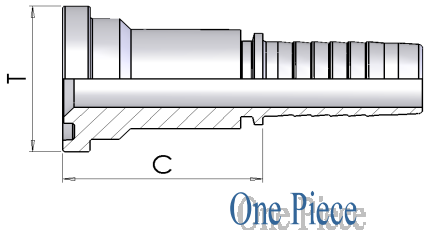

part number	hose I.D.		Dimension			
			dash	flange		cut-off
	in	mm	size	T	mm	C
OL1650-01	1/2	12,7	08	1/2	31,8	46
OL1650-02	1/2	12,7	08	3/4	41.3	53
OL1650-03	5/8	15,9	10	1/2	31,8	46
OL1650-04	5/8	15,9	10	3/4	41.3	53
OL1650-05	5/8	15,9	10	1	47.6	59
OL1650-06	3/4	19	12	3/4	41.3	54
OL1650-07	3/4	19	12	1	47.6	60
OL1650-08	1	25,4	16	3/4	41.3	55
OL1650-09	1	25,4	16	1	47.6	61
OL1650-10	1	25,4	16	1.1/4	54	68
OL1650-11	1.1/4	31,8	20	1.1/4	54	70
OL1650-12	1.1/4	31,8	20	1.1/2	63.5	76
OL1650-13	1.1/2	38,1	24	1.1/2	63.5	76
OL1650-14	1.1/2	38,1	24	2	79.4	85
OL1650-15	2	50,8	32	2	79.4	85

OL1450 Flangia 90°SAE 6000 PSI


(SFS 90°) 90°SAE Flange 6000 PSI

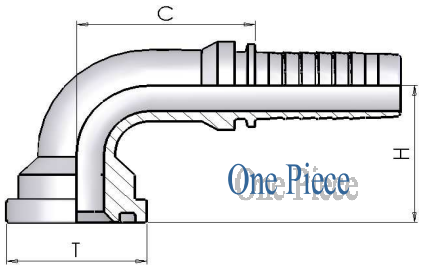

part number	hose I.D.		Dimension				
			dash	flange		drop	cut-off
	in	mm	size	T	mm	H	C
OL1450-01	1/2	12,7	08	1/2	31,8	39	39
OL1450-02	1/2	12,7	08	3/4	41.3	48	39
OL1450-03	5/8	15,9	10	1/2	31,8	42	45
OL1450-04	5/8	15,9	10	3/4	41.3	51	45
OL1450-05	5/8	15,9	10	1	47.6	56	45
OL1450-06	3/4	19	12	1/2	31,8	54	56
OL1450-07	3/4	19	12	3/4	41.3	55	56
OL1450-08	3/4	19	12	1	47.6	63	56
OL1450-09	1	25,4	16	3/4	41.3	64	68
OL1450-10	1	25,4	16	1	47.6	69	70
OL1450-11	1	25,4	16	1.1/4	54	74	71
OL1450-12	1.1/4	31,8	20	1.1/4	54	83	87
OL1450-13	1.1/4	31,8	20	1.1/2	63.5	90	87
OL1450-14	1.1/2	38,1	24	1.1/2	63.5	99	102
OL1450-15	1.1/2	38,1	24	2	79.4	108	103
OL1450-16	2	50,8	32	2	79.4	136	125

OL1550 Flangia 45°SAE 6000 PSI

(SFS 45°) 45°SAE Flange 6000 PSI

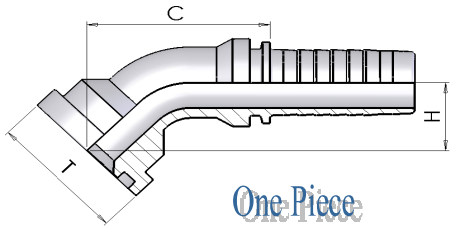


part number	hose I.D.		Dimension				
			dash	flange		drop	cut-off
	in	mm	size	T	mm	H	C
OL1550-01	1/2	12,7	08	1/2	31,8	22	62
OL1550-02	1/2	12,7	08	3/4	41.3	28	69
OL1550-03	5/8	15,9	10	1/2	31,8	21	66
OL1550-04	5/8	15,9	10	3/4	41.3	27	75
OL1550-05	5/8	15,9	10	1	47.6	32	77
OL1550-06	3/4	19	12	3/4	41.3	28	74
OL1550-07	3/4	19	12	1	47.6	32	90
OL1550-08	1	25,4	16	3/4	41.3	30	101
OL1550-09	1	25,4	16	1	47.6	34	86
OL1550-10	1	25,4	16	1.1/4	54	41	112
OL1550-11	1.1/4	31,8	20	1.1/4	54	43	107
OL1550-12	1.1/4	31,8	20	1.1/2	63.5	48	138
OL1550-13	1.1/2	38,1	24	1.1/2	63.5	50	122
OL1550-14	1.1/2	38,1	24	2	79.4	66	163
OL1550-15	2	50,8	32	2	79.4	61	145

Inserto standard / Standard tail

OL1401 Flangia 90°SAE 3000 PSI - Tipo Lungo


(SFL 90°L) 90°SAE Flange 3000 Psi - Long Drop

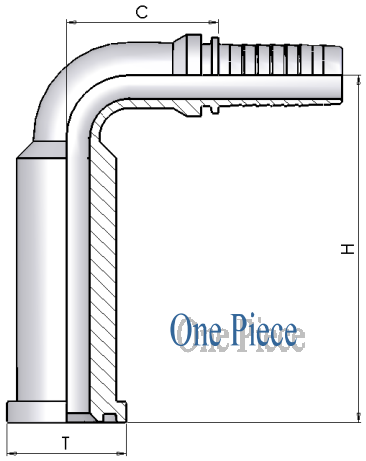

part number	hose I.D.		Dimension				
			dash	flange		drop	cut-off
	in	mm	size	T	mm	H	C
OL1401-01	1/2	12,7	08	1/2	30,2	73	39
OL1401-02	3/4	19	12	3/4	38.1	123	56
OL1401-03	1	25,4	16	1	44.5	127	70
OL1401-04	1.1/4	31,8	20	1.1/4	50.8	178	85
OL1401-05	1.1/2	38,1	24	1.1/2	60.3	220	99

OL1402 Flangia 90°SAE 6000 PSI - Tipo Lungo


(SFS 90°L) 90°SAE Flange 6000 Psi - Long Drop

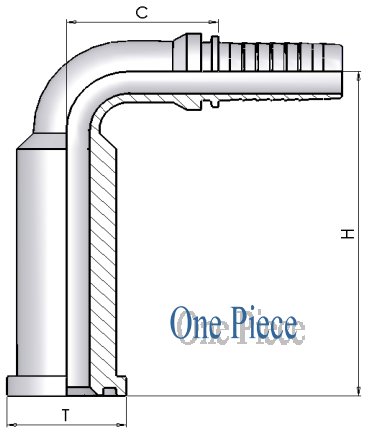

part number	hose I.D.		Dimension				
			dash	flange		drop	cut-off
	in	mm	size	T	mm	H	C
OL1402-01	1/2	12,7	08	1/2	31,8	75	40
OL1402-02	3/4	19	12	3/4	41.3	126	56
OL1402-03	1	25,4	16	1	47.6	132	70
OL1402-04	1.1/4	31,8	20	1.1/4	54	185	82
OL1402-05	1.1/2	38,1	24	1.1/2	63.5	233	99

OL1640 Flangia Diritta SUPERCAT


(SFC) Straight 'CAT' Flange

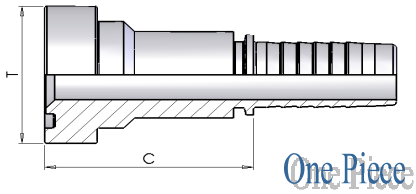

part number	hose I.D.		Dimension			
			dash	flange		cut-off
	in	mm	size	T	mm	C
OL1640-01	3/4	19	12	3/4	41.3	58
OL1640-02	3/4	19	12	1	47.6	64
OL1640-03	1	25,4	16	1	47.6	65
OL1640-04	1	25,4	16	1.1/4	54	73
OL1640-05	1.1/4	31,8	20	1.1/4	54	74
OL1640-06	1.1/4	31,8	20	1.1/2	63.5	78
OL1640-07	1.1/2	38,1	24	1.1/2	63.5	80

OL1480 Flangia 90°SUPERCAT


(SFC 90°) 90°'CAT' Flange

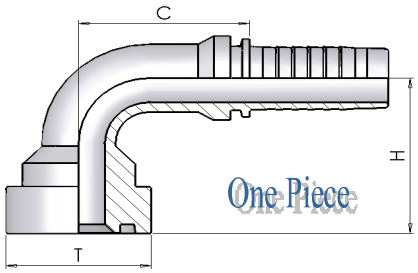

part number	hose I.D.		Dimension				
			dash	flange		drop	cut-off
	in	mm	size	T	mm	H	C
OL1480-01	3/4	19	12	3/4	41.3	62	56
OL1480-02	3/4	19	12	1	47.6	65	56
OL1480-03	1	25,4	16	1	47.6	74	78
OL1480-04	1	25,4	16	1.1/4	54	80	78
OL1480-05	1.1/4	31,8	20	1.1/4	54	90	97
OL1480-06	1.1/4	31,8	20	1.1/2	63.5	97	96
OL1480-07	1.1/2	38,1	24	1.1/2	63.5	104	115

OL1570 Flangia 45°SUPERCAT

(SFC 45°) 45°'CAT' Flange

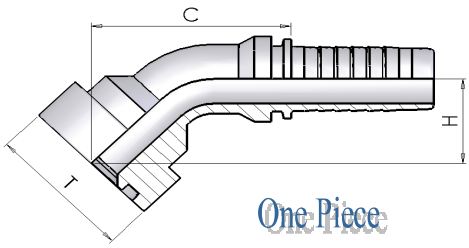


part number	hose I.D.		Dimension				
			dash	flange		drop	cut-off
	in	mm	size	T	mm	H	C
OL1570-01	3/4	19	12	3/4	41.3	32	88
OL1570-02	3/4	19	12	1	47.6	37	93
OL1570-03	1	25,4	16	1	47.6	40	118
OL1570-04	1	25,4	16	1.1/4	54	44	122
OL1570-05	1.1/4	31,8	20	1.1/4	54	44	146
OL1570-06	1.1/4	31,8	20	1.1/2	63.5	48	149
OL1570-07	1.1/2	38,1	24	1.1/2	63.5	52	172

Inserto standard / Standard tail

OL1641 Inserto Semilavorato

Blank Insert

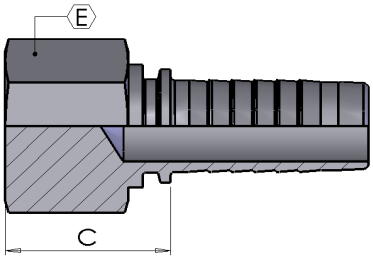


trattamento superficiale: non zincato
surface treatment: *without zinc plating*

part number	hose I.D.		Dimension			
			dash		hex	cut-off
	in	mm	size		E	C
OL1641-01	1/4	6,4	04		19	28
OL1641-02	3/8	9,5	06		22	23
OL1641-03	1/2	12,7	08		27	29
OL1641-04	5/8	15,9	10		30	31
OL1641-05	3/4	19	12		32	33
OL1641-06	1	25,4	16		38	36
OL1641-07	1.1/4	31,8	20		50	41
OL1641-08	1.1/2	38,1	24		55	43
OL1641-09	2	50,8	32		65	45

OL1403 Giunzione per Tubi Flessibili

Hose Junction

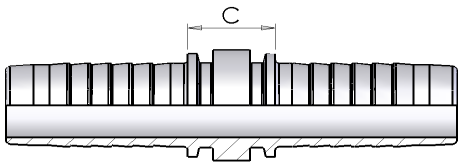


part number	hose I.D.		Dimension			
			dash			cut-off
	in	mm	size			C
OL1403-01	3/16	4,8	03			17
OL1403-02	1/4	6,4	04			17
OL1403-03	5/16	7,9	05			17
OL1403-04	3/8	9,5	06			17
OL1403-05	1/2	12,7	08			18
OL1403-06	5/8	15,9	10			18
OL1403-07	3/4	19	12			19
OL1403-08	1	25,4	16			21
OL1403-09	1.1/4	31,8	20			24
OL1403-10	1.1/2	38,1	24			24
OL1403-11	2	50,8	32			26

Inserto standard / Standard tail

OL1642 Gambo a Pressare Con Tasca Saldare

Weldable Fitting

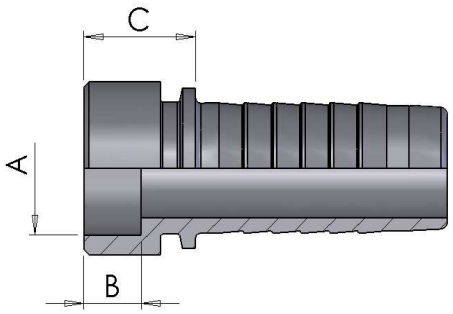

trattamento superficiale: non zincato
surface treatment: *without zinc plating*

part number	hose I.D.		Dimension			
			dash			cut-off
	in	mm	size	A	B	C
OL1642-01	3/16	4,8	03	06	6	12
OL1642-02	3/16	4,8	03	08	6	12
OL1642-03	1/4	6,4	04	06	6	14
OL1642-04	1/4	6,4	04	08	6	14
OL1642-05	1/4	6,4	04	10	6	15
OL1642-06	1/4	6,4	04	12	7	17
OL1642-07	5/16	7,9	05	08	6	14
OL1642-08	5/16	7,9	05	10	6	14
OL1642-09	5/16	7,9	05	12	6	14
OL1642-10	3/8	9,5	06	06	6	15
OL1642-11	3/8	9,5	06	08	6	15
OL1642-12	3/8	9,5	06	10	6	14
OL1642-13	3/8	9,5	06	12	7	15
OL1642-14	3/8	9,5	06	14	8	15
OL1642-15	3/8	9,5	06	15	7	14
OL1642-16	1/2	12,7	08	12	7	15
OL1642-17	1/2	12,7	08	14	8	15
OL1642-18	1/2	12,7	08	15	7	15
OL1642-19	1/2	12,7	08	16	7	15
OL1642-20	1/2	12,7	08	18	7	15
OL1642-21	1/2	12,7	08	20	9	18
OL1642-22	5/8	15,9	10	12	7	15
OL1642-23	5/8	15,9	10	16	8	16
OL1642-24	5/8	15,9	10	18	8	16
OL1642-25	5/8	15,9	10	20	9	18
OL1642-26	5/8	15,9	10	22	9	18
OL1642-27	3/4	19	12	16	8	16
OL1642-28	3/4	19	12	18	8	16
OL1642-29	3/4	19	12	20	9	18
OL1642-30	3/4	19	12	22	9	18
OL1642-31	3/4	19	12	25	9	19
OL1642-32	3/4	19	12	28	9	20
OL1642-33	1	25,4	16	25	9	19
OL1642-34	1	25,4	16	28	9	20
OL1642-35	1	25,4	16	30	9	20
OL1642-36	1	25,4	16	32	9	20
OL1642-37	1	25,4	16	38	11	26
OL1642-38	1.1/4	31,8	20	30	9	21
OL1642-39	1.1/4	31,8	20	32	9	21
OL1642-40	1.1/4	31,8	20	35	11	23
OL1642-41	1.1/4	31,8	20	38	11	24
OL1642-42	1.1/2	38,1	24	32	9	23
OL1642-43	1.1/2	38,1	24	38	11	23
OL1642-44	1.1/2	38,1	24	42	10	23
OL1642-45	1.1/2	38,1	24	50	10	23
OL1642-46	2	50,8	32	50	10	23